

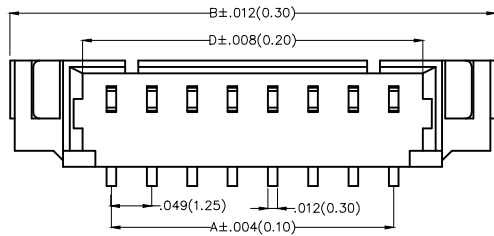
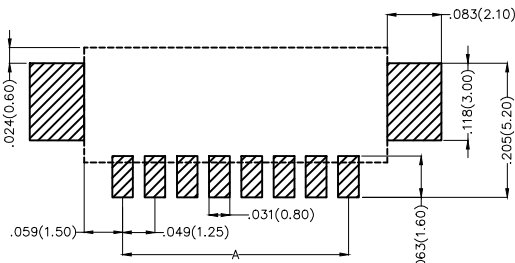


1 2 3 4 5 6 7 8

REV	LOCATIONS	DESCRIPTION	DATE	REVISED	APPD



Electrical
 Current Rating: 1.0A AC(rms)/DC
 Voltage Rating: 125V AC(rms)/DC
 Contact Resistance: 20 mΩ Max
 Insulation Resistance: 100 MΩ MIN
 Withstanding Voltage: 250V AC r.m.s
 Temperature Range-Operating: -40°C ~+85°C
 Material and Plating
 Housing: PA9T(UL 94V-0)
 Contact Pin: Brass
 Plating: Full tin

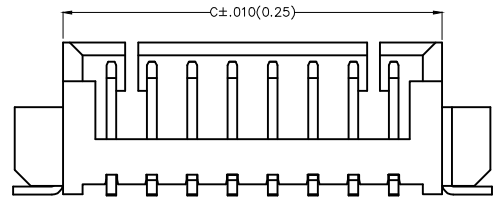

Recommended P.C.Board Layout

Ordering Information

FWF 125 05 - S XX S X 4 W5 M
 1 2 3 4 5 6 7 8 9 10

1 Category FWF-Wafer	2 Series Number 125-Pitch1.25mm	3 Distinction No. 05	4 Row Option S-Single Row	5 Circuits XX	6 Entry Angle S-180° Vertical
7 Plating 2-Tin Plated	8 Material-Resin 4-PA9T	9 Color-Resin W5-Natural	10 Packaging M-Reel		

 THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 8/JUL/13	PART NO. FWF12505-SXXSX4W5M	ITEM NO. FWF12505	 Leader Of Industry	
	DESIGN UNITS Inch (metric)	X.±.012(0.30) X.X±.008(0.20) X.XX±.006(0.15) X.XXX±.004(0.10)	X.±5° .X'±2° .XX'±1° .XXX'±0.5°	CHECKED BY JACOB	DATE 8/JUL/13	TITLE Wire to Board (Wafer) Pitch 1.25mm 180° Vertical (SMT)		REV 1
SCALE 5:1	SIZE A4	DRAWN BY CHERRY		DATE 8/JUL/13	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			

1 2 3 4 5 6 7 8

1 2 3 4 5 6 7 8

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

A

B

C

D

E

F

A

B



C

D

E

F

Circuits (n)	Part No.	Dimensions(in/mm)			
		A	B	C	D
2	FWF12505-S02S24W5M	.049(1.25)	.297(7.55)	.167(4.25)	.120(3.05)
3	FWF12505-S03S24W5M	.098(2.50)	.346(8.80)	.217(5.50)	.169(4.30)
4	FWF12505-S04S24W5M	.147(3.75)	.396(10.05)	.266(6.75)	.218(5.55)
5	FWF12505-S05S24W5M	.197(5.00)	.445(11.30)	.315(8.00)	.268(6.80)
6	FWF12505-S06S24W5M	.246(6.25)	.494(12.55)	.364(9.25)	.317(8.05)
7	FWF12505-S07S24W5M	.295(7.50)	.543(13.80)	.413(10.50)	.366(9.30)
8	FWF12505-S08S24W5M	.344(8.75)	.593(15.05)	.463(11.75)	.415(10.55)
9	FWF12505-S09S24W5M	.394(10.00)	.642(16.30)	.512(13.00)	.465(11.80)
10	FWF12505-S10S24W5M	.443(11.25)	.691(17.55)	.561(14.25)	.514(13.05)
11	FWF12505-S11S24W5M	.492(12.50)	.740(18.80)	.610(15.50)	.563(14.30)
12	FWF12505-S12S24W5M	.541(13.75)	.789(20.05)	.659(16.75)	.612(15.55)
13	FWF12505-S13S24W5M	.591(15.00)	.839(21.30)	.709(18.00)	.661(16.80)
14	FWF12505-S14S24W5M	.640(16.25)	.888(22.55)	.758(19.25)	.711(18.05)
15	FWF12505-S15S24W5M	.689(17.50)	.937(23.80)	.807(20.50)	.760(19.30)


 THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY	DATE	PART NO.	ITEM NO.	 Leader Of Industry	
	DESIGN UNITS Inch (metric)	X.±.012(0.30) X.X±.008(0.20) X.XX±.006(0.15) X.XXX±.004(0.10)	X.±5° .X'±2° .XX'±1° .XXX'±0.5°	FRANK	8/JUL/13	FWF12505-SXXSX4W5M		FWF12505
SCALE	SIZE		CHECKED BY	DATE	TITLE		REV 1	SHEET NO. 2/3
5:1	A4		JACOB	8/JUL/13	Wire to Board (Wafer) Pitch 1.25mm 180° Vertical (SMT)			
			DRAWN BY	DATE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
			CHERRY	8/JUL/13				

1 2 3 4 5 6 7 8




REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD
1	△	MPQ 1500PCS/Reel Change to 1000Pcs/Reel	20150811	CHERRY	JACOB

Note:

1. 10 sprocket hole cumulative tolerance±0.2
2. Carrier camber is within 1.0mm in 100mm
3. Material: White Conductive polystyrene Alloy 100% recyclable
4. All dimensions meet EIA-481-3 requirements
5. Component load per 13" reel: 1000 pcs

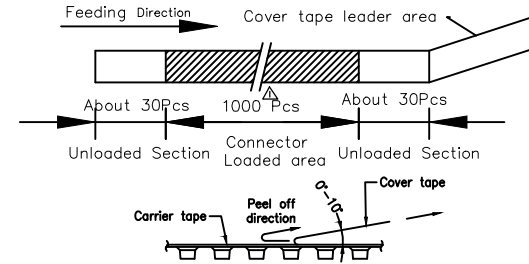

Circuits (n)	Dimensions(in/mm)		Circuits (n)	Dimensions(in/mm)	
	D	W		D	W
2	.295(7.50)	.630(16.00)	10	.559(14.20)	1.260(32.00)
3	.295(7.50)	.630(16.00)	11	.559(14.20)	1.260(32.00)
4	.453(11.50)	.945(24.00)	12	.559(14.20)	1.260(32.00)
5	.453(11.50)	.945(24.00)	13	.795(20.20)	1.732(44.00)
6	.453(11.50)	.945(24.00)	14	.795(20.20)	1.732(44.00)
7	.559(14.20)	1.260(32.00)	15	.795(20.20)	1.732(44.00)
8	.559(14.20)	1.260(32.00)			
9	.559(14.20)	1.260(32.00)			

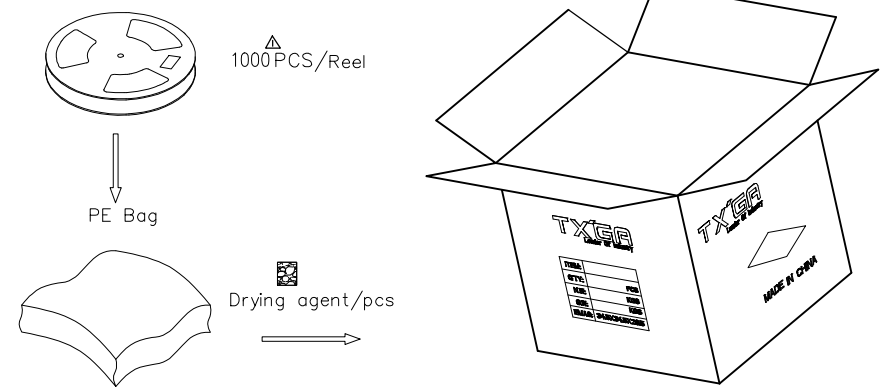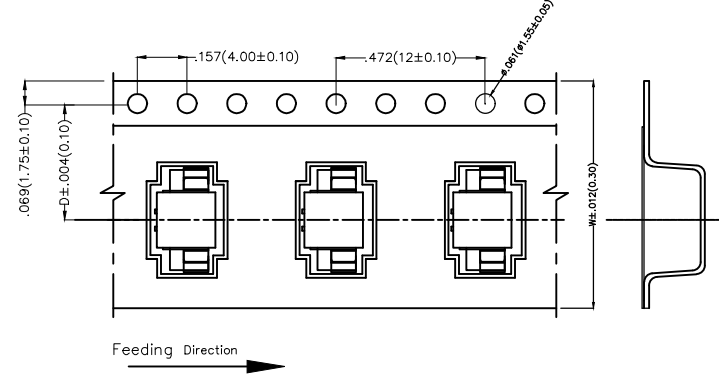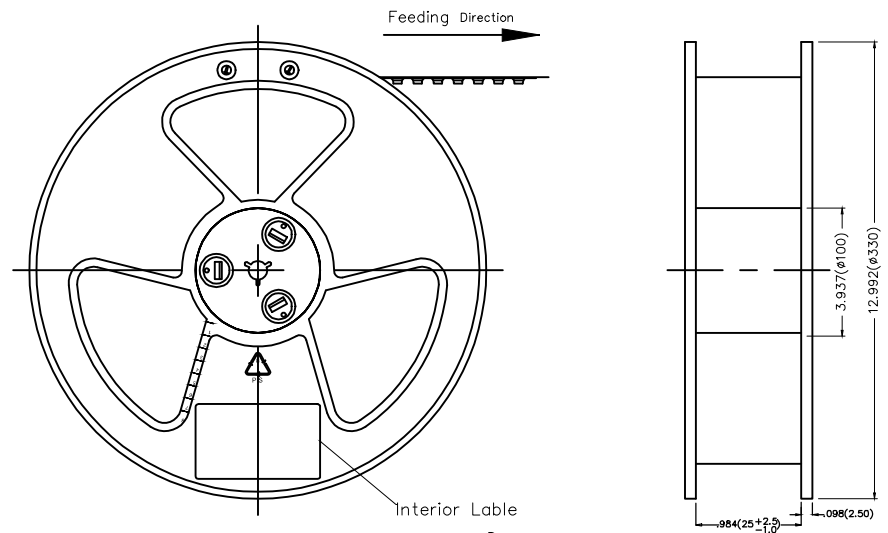

 THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY	DATE	PART NO.	ITEM NO.	 Leader Of Industry	
	X.±.012(0.30)	X.±5'	FRANK	8/JUL/13	FWF12505-SXXSX4W5M	FWF12505		
	DESIGN UNITS	X.X±.008(0.20)	.X±2'	CHECKED BY	DATE	TITLE		REV 1 SHEET NO. 3/3
	Inch (metric)	X.XX±.006(0.15)	.XX±1'	JACOB	8/JUL/13	Wire to Board (Wafer) Pitch 1.25mm 180° Vertical (SMT)		
SCALE	SIZE	X.XXX±.004(0.10)	.XXX±0.5'	DRAWN BY	DATE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
5:1	A4		CHERRY	8/JUL/13				

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [TXGA](#) manufacturer:

Other Similar products are found below :

[0015917161](#) [0022155065](#) [57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [01.001.5753.1](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)
[CSU011177004](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#)
[65781-047](#) [65817-010LF](#) [65817-015LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-](#)
[4853B](#) [71.350.2428.0](#) [733-134](#) [733-162](#) [760-3052](#) [MHR-64-VUAL](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#)
[801-43-006-10-002000](#) [803-43-024-10-001000](#) [803-93-012-10-001000](#) [8-1437020-4](#) [819-22-004-30-001101](#) [820-22-006-30-001101](#)
[820-22-008-30-001101](#) [821-22-002-10-001101](#)