

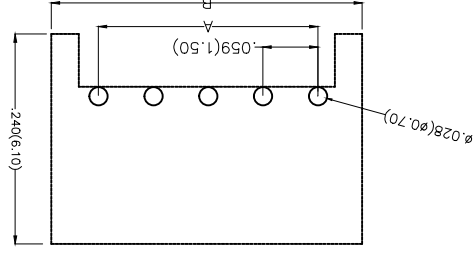



REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

Electrical
 Current Rating: 1.0A AC(rms)/DC
 Voltage Rating: 50V AC(rms)/DC
 Contact Resistance: 20 mΩ Max
 Insulation Resistance: 500 MΩ MIN
 Withstanding Voltage: 500V AC r.m.s
 Temperature Range—Operating: -25°C~+85°C
 Material and Plating
 Housing: P446(UL 94V-0)
 Contact Pin: Brass
 Plating: Tin Plated

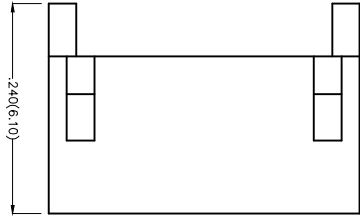

Recommended P.C.Board Layout



THIRD ANGLE PROJECTION
 (UNLESS SPECIFIED)

GENERAL TOLERANCES (UNLESS SPECIFIED)	APPROVE BY	DATE	PART NO.	ITEM NO.
X.±.012(0.30)	FRANK	8/JUL/13	FWF15003-SXXB26WSB	FWF15003
X.±.2	JACOB	8/JUL/13		
X.XX±.006(0.15)	DRAWN BY	DATE	TITLE	
X.XX±.004(0.10)	CHERRY	8/JUL/13	Wire to Board (Water) Pitch 1.5mm 90° Angle (DIP)	
A4			REV 0	SHEET NO. 1/2
SCALE			THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(SZ)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	

1 Category | FWF-Water
 2 Series Number | 150-Pitch1.5mm
 3 Distinction No. | 03
 4 Row Option | S-Single Row
 5 Circuits | XX
 6 Entry Angle | B-90° Angle

7 Plating | 2-Tin Plated
 8 Material-Resin | 6-PA46
 9 Color-Resin | WS-White
 10 Packaging | B-PE Bag

FWF 150 03 - S XX B 2 6 W5 B

Ordering Information


1 | 2 | 3 | 4 | 5 | 6

7 | 8 | 9 | 10

TXGA
 Leader Of Industry

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

Circuits (n)	Part No.	Dimensions(in/mm)	
		A	B
2	FWF15003-S02B26W5B	.059(1.50)	.177(4.50)
3	FWF15003-S03B26W5B	.118(3.00)	.236(6.00)
4	FWF15003-S04B26W5B	.177(4.50)	.295(7.50)
5	FWF15003-S05B26W5B	.236(6.00)	.354(9.00)
6	FWF15003-S06B26W5B	.295(7.50)	.413(10.50)
7	FWF15003-S07B26W5B	.354(9.00)	.472(12.00)
8	FWF15003-S08B26W5B	.413(10.50)	.531(13.50)
9	FWF15003-S09B26W5B	.472(12.00)	.591(15.00)
10	FWF15003-S10B26W5B	.531(13.50)	.650(16.50)
11	FWF15003-S11B26W5B	.591(15.00)	.709(18.00)
12	FWF15003-S12B26W5B	.650(16.50)	.768(19.50)

 THIRD ANGLE PROJECTION	X±.012(0.30)	X±.5	CHECKED BY FRANK	DATE 8/JUL/13	PART NO. FWF15003-SXXB26W5B ITEM NO. FWF15003	TITLE Wire to Board (Water Pitch 1.5mm 90° Angle (DIP))	REV 0	SHEET NO. 2/2
	X±.008(0.20)	X±.2	JACOB	DATE 8/JUL/13	DRAWN BY JACOB		DATE 8/JUL/13	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(SZ)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION
X±.006(0.15)	X±.1	DRAWN BY CHERRY	DATE 8/JUL/13	GENERAL TOLERANCES (UNLESS SPECIFIED)	APPROVE BY FRANK	SCALE 5:1	SCALE A4	X±.004(0.10)
X±.004(0.10)	X±.05	CHECKED BY FRANK	DATE 8/JUL/13	GENERAL TOLERANCES (UNLESS SPECIFIED)	APPROVE BY FRANK	SCALE A4	SCALE A4	X±.05

1 2 3 4 5 6 7 8

A B C D E F

F E D C B A

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [TXGA](#) manufacturer:

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [DF62W-EP2022PC](#) [2203348](#) [DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [891-007-9SS-BST1T](#) [000-34000](#) [0008550134](#) [0009482033](#) [0009507031](#) [57102-F02-18ULF](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [0009508121](#) [0022285053](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1 \(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [CSU011177004](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [644827-2](#) [647662-1](#) [65039-019ELF](#) [65692-001LF](#) [65781-018](#) [65781-047](#)