

大亞秋田電子科技（深圳）有限公司

碳膜固定電阻器



規格：RD 系列

製造廠商：


大亞秋田電子科技（深圳）
有限公司

使用廠商：

立創

認可	審核	製作
		肖明艷

認可	審核	製作

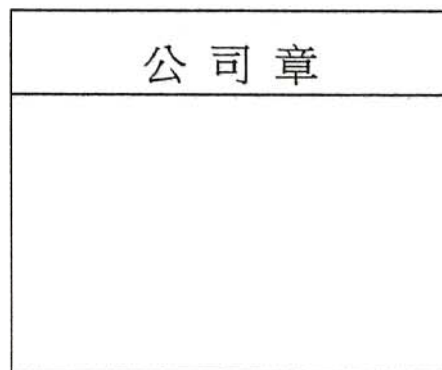

目錄

INDEX

序號	內 容	頁 碼
1	適用範圍 Specification	2
2	特性 Feature	2
3	品名 Part Number	2
4	結構圖 Construction	2
5	術語 Glossary	3
6	尺寸 Dimension	4
7	色碼 Explanation of color	4
8	電氣特性 Characteristics	5
9	性能 Performance	5-6
10	成型方式 Forming type	6-8
11	訂貨方式 How To Order	9
12	使用注意事項 Precautions for Use	10

1. 適用範圍 Specification

- 1-1 本承認書僅適用本公司生產之各種碳膜固定電阻器（1/8W、1/6W、1/4W、1/2W、1W、2W、3W）及其小型化之成品規格。
- The specification is only suitable for Carbon Film Fixed Resistors(1/8W、1/6W、1/4W、1/2W、1W、2W、3W)and there are small size manufactured by SHI MENG ELECTRONIC CO.,LTD.
- 1-2 參考標準 Applicable specification
- 本承認書參考《JIS C5201-2011》和《GB/T 5729-2003/IEC 60115-1:2001》
- The specification Applicable specification 《JIS C5201-2011》 and 《GB/T 5729-2003/IEC 60115-1:2001》
- 1-3 產品符合 RoHS 及 REACH 法規的最新環保要求。
- Products meet the latest environmental requirements of RoHS and REACH regulations.

2. 特性 Feature

- 2-1 高品質、低成本 High quality performance、Great economy
- 2-2 適用自動化插件 Automatically insertable

3. 品名 Part Number


依據其種類，分別注明額定功率、容許差、公稱電阻值和形狀。

According the Resistors type, To mark the Rated power, Tolerance, Resistance value, and forming type.

例(e.g)：	RD	1/4W	J(±5%)	100Ω	T52
種類	額定功率	容許差	阻值	形狀	
Type	Rated power	Tolerance	Resistance	Forming	

4. 結構圖 Construction

- a) 鍍錫銅導線 Tinned copper lead wire
(注：可按要求提供 CP 線引腳)
- b) 鍍錫鐵帽 Tin-plated steel caps
- c) 高穩定性導電膜 High stability Electric conduction film
- d) 高熱傳導瓷棒 High heat exchanged ceramic base
- e) 環氧樹脂塗料 Epoxy resin coating
- f) 色環標示 Color ring Mark

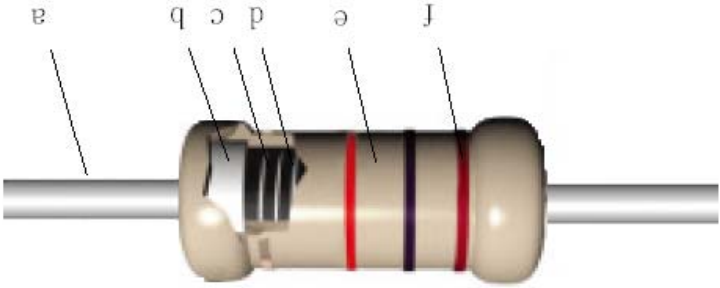

5. 術語 Glossary

5-1. 標稱阻值：電阻器的設計電阻值，通常標注在電阻器上。
Rated resistance：Designed resistance value usually indicated on the resistor。

5-2. 額定環境溫度：電阻器在額定功率下可持續工作的最高環境溫度。請注意如果電阻器安裝在設備內部，那麼此處所謂的環境溫度並非設備周圍的溫度，而是設備內部、電阻器周圍的溫度。

Rated Ambient Temperature：Maximum ambient temperature at which the power rating may be applied continuously. The rated ambient temperature refers to the temperature around the resistor mounted inside the equipment, not to the air temperature outside the equipment。

5-3. 額定功率：在 70℃ 環境溫度下進行耐久性試驗，而且阻值變化不超過該試驗的允許值時所允許的最大功率。
Rated power：At 70℃ ambient temperature durability test, and the change in resistance does not exceed the value of the test allows the maximum power allowed。

5-4. 降功率曲線：額定功率系適應在周圍溫度 70℃ 可以連續負載的最大功率，但額定環境溫度如超過 70℃ 時之額定電力則依圖的降功率曲線實施。

Rated power is maximum power which can be continuously loaded at specified ambient temperature 70℃, however when Rated Ambient Temperature exceeds 70℃, rated power should be determined from the derating curve。



5-5. 額定電壓：額定環境溫度或端子部溫度下可連續施加的最大直流電壓或交流電壓（商用頻率實效值），用額定功率和公稱電阻值，按以下公式計算。但額定電壓不可超過最大工作電壓。
Rated Voltage：Maximum allowable D.C. or A.C. voltage(rms), capable to be continuously applied to a resistor or a resistor element under the rated ambient temperature or terminal part temperature. It shall be calculated from the rated power and nominal resistance using the following formula. The rated voltage shall not exceed the max. working voltage。

$$U = \sqrt{P \times R} \quad I = \frac{U}{R}$$


U：電壓
P：功率
R：阻值
I：電流

5-6. 臨界阻值：在不超過最高使用電壓的情況下可施加額定功率的最大公稱電阻值。在臨界電阻值下，額定電壓等於最大工作電壓。
Critical Resistance：The maximum nominal resistance value at which the rated power can be applied without exceeding the maximum working voltage. The rated voltage is equal to the max. working voltage at the critical resistance value。

5-7. 最高使用電壓：電阻器或電阻元件上可連續施加的最大直流電壓或交流電壓（商用頻率實效值）。但在臨界電阻值以下，可以施加的最大電壓為額定電壓。
Maximum Working Voltage：Maximum D.C. or A.C. voltage(rms) that can be continuously applied to the terminations of a resistor. However, the maximum value of the applicable voltage is the rated voltage at the critical resistance value or lower。

5-8. 過負荷電壓：在短時間過載試驗中可連續施加 5 秒鐘的電壓，一般為額定電壓的 2.5 倍，但不可超過最大過載電壓。
Allowable voltage：which is applied in 5 sec. under short time overload test. Overload voltage shall be 2.5 times of rated voltage or max. overload voltage, whichever is lower。

6. 尺寸 Dimension

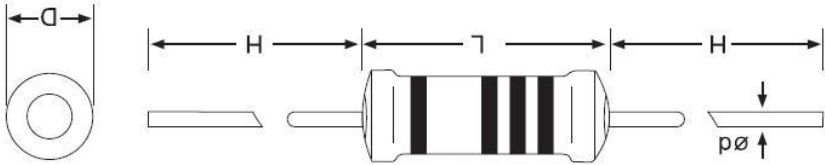

Unit: mm


Type \ Size		L±1	D±1	H±3	d±0.06	Resistance range	Tolerance
±5%	1/6W 1/8W 1/4WS	3.5*	1.7*	27	0.45	0Ω & 0.1Ω~15MΩ	±2%
	1/4W 1/2WS	6.5*	2.4*	27	0.50	0Ω & 0.1Ω~22MΩ	
	1/2W 1WS	9.2	3.3	26	0.60	0Ω & 0.1Ω~22MΩ	
	1W 2WS	11	4.5	28	0.70	0.1Ω~22MΩ	
	2W 3WS	15	5.0	32	0.78	0.1Ω~22MΩ	
	3W 5WS	18	6.0	33	0.78	0.1Ω~22MΩ	

注：①0Ω阻值範圍為<50mΩ；

② “*” means “±0.5”

③特殊要求如面漆不燃性，色碼耐溶劑清洗等，請訂購時務必向我司提出，可按客戶要求製作。
④為滿足產品立式使用，引線根部腳漆長度≤1.5mm，臥式使用品不考量此參數；

7. 色碼 Explanation of color

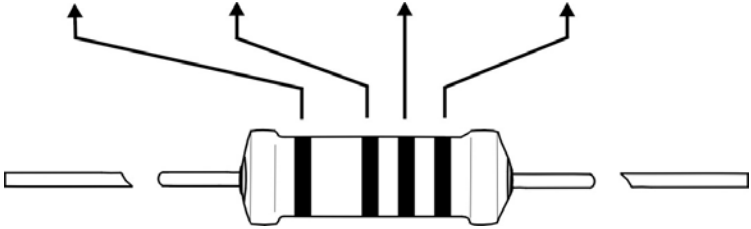

顏色	第一位數	第二位數	倍數	容許差%
Black 黑	0	0	10 ⁰	
Brawn 棕	1	1	10 ¹	
Red 紅	2	2	10 ²	G(±2%)
Orange 橙	3	3	10 ³	
Yellow 黃	4	4	10 ⁴	
Green 綠	5	5	10 ⁵	
Blue 藍	6	6	10 ⁶	
Violet 紫	7	7	10 ⁷	
Gray 灰	8	8	10 ⁸	
White 白	9	9	10 ⁹	J(±5%)
Gold 金			10 ⁻¹	
Silver 銀			10 ⁻²	

注：0Ω用一道黑色表示 Notice: 0Ω mark with one Black color

8. 電氣特性 Characteristics (表一)

Item						Size							
額定功率		1/8W 1/6W		1/4W		1/2W		1W		2W		3W	
Rated power		1/4WS		1/2WS		1WS		2WS		3WS		5WS	
最高使用電壓		200V		250V		350V		500V		500V		500V	
Max continuous working voltage		400V		500V		700V		700V		1000V		1000V	
最高過負荷電壓		400V		500V		700V		700V		1000V		1000V	
耐絕緣電壓		300V		350V		500V		500V		700V		700V	
Insulation resistance		300V		350V		500V		500V		700V		700V	
使用溫度範圍		-55℃ ~ +125℃											
Operating temp range													


9. 性能 Performance

特性項 Characteristics	規格值 Specifications		測試方法 Test methods	
溫度係數 T.C.R	+350PPM/℃~-2000PPM/℃, 以下阻值段可供參考: ≤10Ω: ±350PPM/℃; 11Ω~99KΩ: 0~-500PPM/℃; 100KΩ~1MΩ: 0~-800PPM/℃; 1.1MΩ~10MΩ: 0~-1500PPM/℃; ≥11MΩ: 0~-2000PPM/℃;		R1: 常溫(T1) 阻抗值. Resistance value at room temperature (T1). R2: 常溫+100℃(T2) 阻抗值. Resistance value at room temperature+100℃. $\frac{R2-R1}{R1} \times 10^6 (PPM) / ^\circ C$ $\frac{R1 \times (T2-T1)}{R2-R1}$	
溫度壽命 Load life	阻抗值變化±(5%R+0.05Ω), 機械特性不可有損傷. Resistance change rate±(5%R+0.05Ω) MAX. With no evidence of mechanical damage.		溫度 70±2℃, 恆溫箱中, 加額定電壓或最高使用電壓(取小者), 測試 1.5 小時停止 0.5 小時, 連續 1000 小時. Resistance change after 1000hrs operating at rated voltage or Max continuous working voltage (Which ever is the less.) with duty cycle of 1.5hrs ON 0.5hrs OFF at 70℃±2℃.	
短時間過負荷 Short time over load	±(1%R+0.05Ω)		額定電壓*2.5 倍或最高過負荷電壓 (取小者), 測試 5 秒 2.5 times the rated voltage or maximum overload voltage (which ever is less), testing 5 seconds	
絕緣阻抗 Insulation resistance	1000MΩ 以上 1000MΩ or more		將待測物置於 V 型槽 V-block	

耐絕緣電壓 Electric withstanding voltage	阻抗值變化 $\pm(0.5\%R+0.05\Omega)$ 塗裝不可燒損,絕緣 Resistance change $\pm(0.5\%R\pm0.05\Omega)$. No evidence of flashover mechanical damage, Arcing or insulation breakdown.	電阻兩端導線置於金屬 V 型槽上,依表一之電壓規 定印加 60 秒。 Resistance shall be clamped in the trough of a 90 metallic v-block and shall be test at specified in the above list for 60 seconds.		
溫度循環 Temperature cycling	阻抗值變化 $\pm(1\%R+0.05\Omega)$ 以內,機械特性不可 有損傷。 Resistance change is $\pm(1\%R+0.05\Omega)$ MAX. With no evidence of mechanical damage.	Step	溫度	放置時間 Time (MIN)
		1	-25°C \pm 3°C	30
		2	Room temp	10-15
		3	85°C \pm 2°C	30
		4	Room temp	10-15
耐熱性 Resistance to soldering heat	阻抗值變化 $\pm(1\%R+0.05\Omega)$, 以內,機械特性不可 有損傷。 Resistance change is $\pm(1\%R+0.05\Omega)$.MAX. With no evidence of mechanical damage.	將電阻兩端導線浸入錫爐,浸入深度為距離本體 2 \pm 0/-0.5mm; 依下表規定任一項實施		
		Temperature	Dip time	
		350°C \pm 10°C	3 \pm 0.5 sec	
		260°C \pm 5°C	10 \pm 1 sec	
		錫爐溫度: 260 \pm 5°C 浸錫時間: 3 \pm 0.5 sec Test temperatures of solder 260 \pm 5°C Dwell time in solder: 3 \pm 0.5 sec		
焊錫性 Solder ability	百分之 95 覆蓋於導線上 95% coverage minimum			
接頭強度 Join intensity	接點不得有脫落情形 No terminal wire loosening and breakage shall occur.	夾住導線焊接端,並向外翻轉 90°,來回兩次。 Bending strength load 90° reciprocation twice		


10. 成型方式 Forming type

10-1 Tape packing

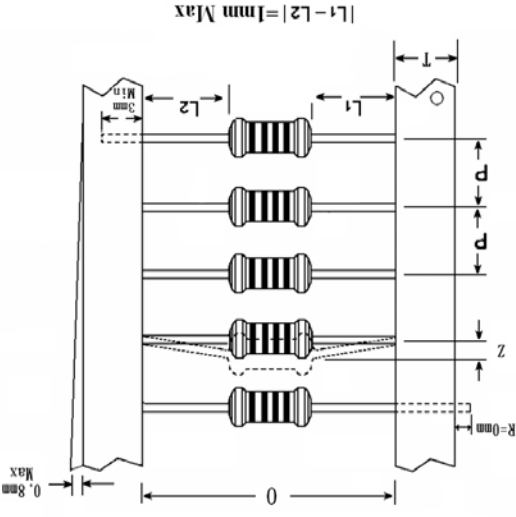


STYLE	TYPE	0	L1-L2	P	T	Z	最小包裝數
T-26	1/8W 1/4WS	26 \pm 1.5	max	5 \pm 0.5	5 \pm 1	1max	5000pcs
	1/4W 1/2WS	26 \pm 1.5	max	5 \pm 0.5	5 \pm 1	1max	5000pcs
T-52	1/8W 1/4WS	52 \pm 1	max	5 \pm 0.2	5 \pm 1	1max	5000pcs
	1/4W 1/2WS	52 \pm 1	max	5 \pm 0.2	5 \pm 1	1max	5000pcs
	1/2W 1WS	52 \pm 1	max	5 \pm 0.2	5 \pm 1	1max	2000pcs
	2WS 1W	52 \pm 1	max	5 \pm 0.2	5 \pm 1	1max	1000pcs
T-63	1W 2WS	63 \pm 3	max	5 \pm 0.5	5 \pm 1	2max	1000pcs
	2WS 1W	73 \pm 5	max	5 \pm 0.5	5 \pm 1	2max	1000pcs
	3WS 2WS	73 \pm 5	max	5 \pm 0.5	5 \pm 1	2max	1000pcs
T-73	3WS 2WS	73 \pm 5	max	5 \pm 0.5	5 \pm 1	2max	1000pcs
	3WS 2WS	73 \pm 5	max	5 \pm 0.5	5 \pm 1	2max	500pcs
	3WS 2WS	73 \pm 5	max	5 \pm 0.5	5 \pm 1	2max	500pcs


10-2 M-Type

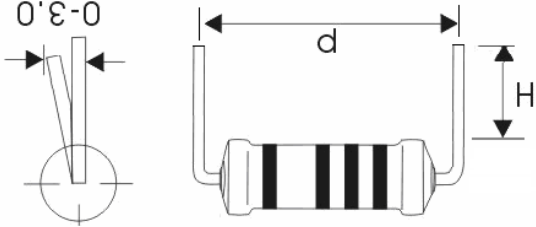


10-3 MK-Type

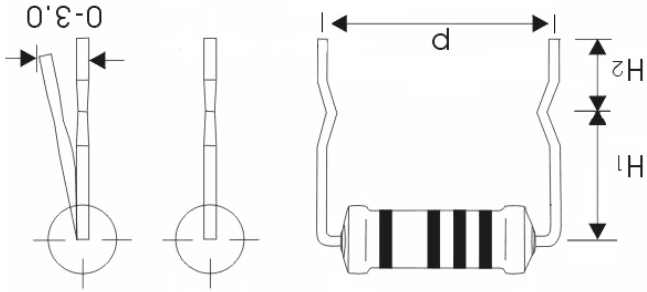

10-4 F-Type

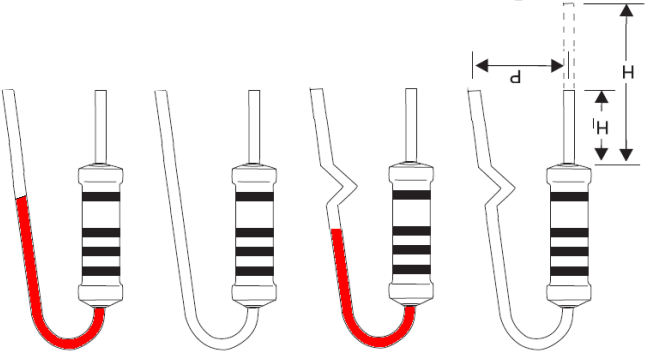

10-5 F-Type 直腳打 KIN (單&雙 KIN)

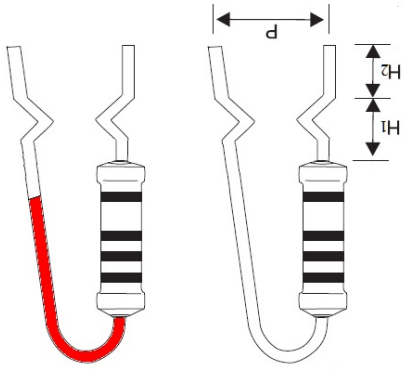

TYPE	1/8W 1/6W 1/4WS	1/4W 1/2WS	1/2W 1WS	1W 2WS	2W 3WS	3W 5WS
	3.2~10	3.2~10	3.2~10	3.2~10	3.2~10	3.2~10
	5	10	12.5	15	20	25
H±0.5						

可依客戶所需求尺寸加工製造

It can be man fractured according to the dimension that required by customers

TYPE	1/4W 1/2WS	1/2W 1WS	1W 2WS	2W 3WS	3W 5WS
	3.5~6	3.5~6	3.5~6	3.5~6	3.5~6
	5/8	5/8	5/8	5/8	5/8
H2±1					

注：1/4W 最小腳距為 8mm、1/2W 最小腳距為 12.5mm

1W 最小腳距為 15mm、2W 最小腳距為 20mm

3W 最小腳距為 23mm。

TYPE	1/8W 1/6W 1/4WS	1/4W 1/2WS	1/2W 1WS	1W 2WS	2W 3WS	3W 5WS
	5-8	5-8	5-8	5-8	6-10	6-10
	27 Max	26 Max	24 Max	28 Max	32 Max	32 Max
	3.2~10	3.2~10	3.2~10	3.2~10	3.2~10	3.2~10
H1±1						
P						

“H” 部份可剪，但長度不得小於 3.2mm

“P” 的尺寸作為參考項，銅質引腳會因加工時的彈性，包裝、儲運、使用等環節的造成彎曲變形，尺寸會有較大誤差。如有爭議，其測試點以本體以下 3.5±1mm 處為準


TYPE	1/2W 1WS	1W 2WS	2W 3WS	3W 5WS
	5-8	5-8	6-10	6-10
	3.5/6	3.5/6	3.5/6	3.5/6
	3.2~10	3.2~10	3.2~10	3.2~10
H2±1				
P				

“H” 部份可剪，但長度不得小於 3.2mm

“P” 的尺寸作為參考項，銅質引腳會因加工時的彈性，包裝、儲運、使用等環節的造成彎曲變形，尺寸會有較大誤差。如有爭議，其測試點以本體以下 3.5±1mm 處為準


10-6 FT-Aviserly Type 立式編帶 (以下為常規品供參考，可依客戶圖紙要求進行協商加工)

●直腳外彎雙KIN型(代號FT-K4)

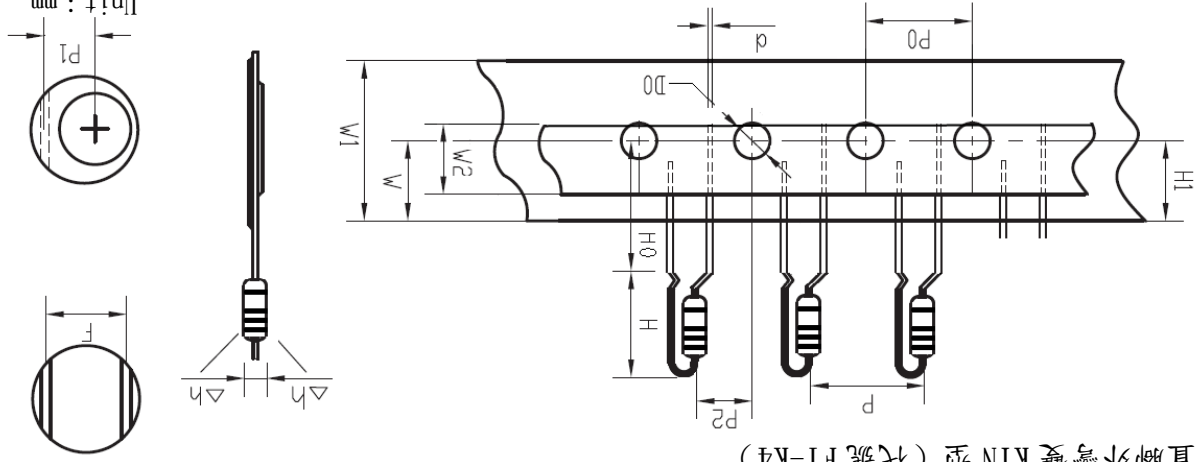


FT-Size	Type	1/4W	1/2W	1WS	1W	2WS	3WS
$H_{\pm 1}$	d	± 0.06	± 0.06	± 0.06	± 0.06	± 0.06	± 0.06
$P_{\pm 1}$	P_0	± 0.3	± 0.3	± 0.3	± 0.3	± 0.3	± 0.3
P_1	P_1	± 0.7	± 0.7	± 0.7	± 0.7	± 0.7	± 0.7
Δh	P_2	± 1.3	± 1.3	± 1.3	± 1.3	± 1.3	± 1.3
W	F	± 0.5	± 0.5	± 0.5	± 0.5	± 0.5	± 0.5
W_1	W_2	± 1	± 1	± 1	± 1	± 1	± 1
10Min	10Min	10Min	10Min	10Min	10Min	10Min	10Min
16.5Max	16.5Max	16.5Max	16.5Max	16.5Max	16.5Max	16.5Max	16.5Max
4	4	4	4	4	4	4	4


Unit : mm

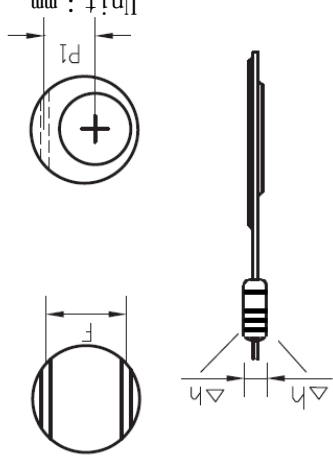

●彎腳打KIN型(代號FT-K1)

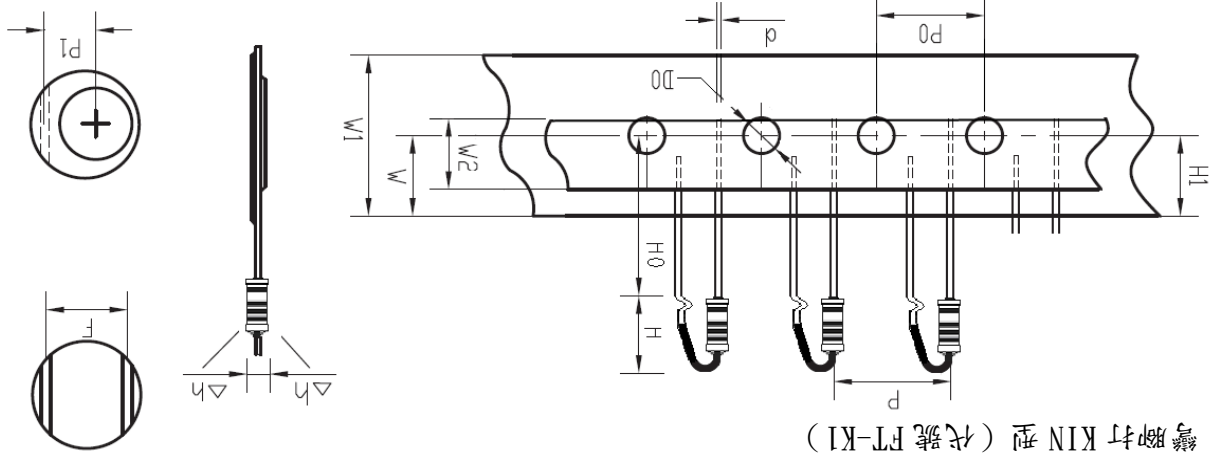

Unit : mm

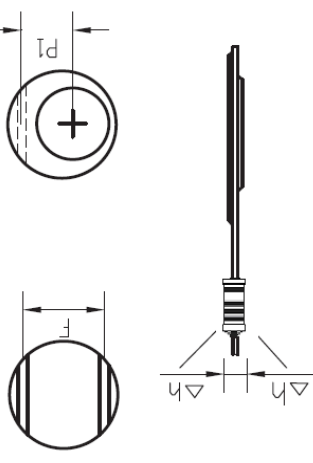

FT-Size	Type	1/4W	1/2W	1WS	1W	2WS	2W	3WS
$H_{\pm 1}$	d	± 0.06	± 0.06	± 0.06	± 0.06	± 0.06	± 0.06	± 0.06
$P_{\pm 1}$	P_0	± 0.3	± 0.3	± 0.3	± 0.3	± 0.3	± 0.3	± 0.3
P_1	P_1	± 0.7	± 0.7	± 0.7	± 0.7	± 0.7	± 0.7	± 0.7
Δh	W	± 0.5	± 0.5	± 0.5	± 0.5	± 0.5	± 0.5	± 0.5
W_1	W_2	± 1	± 1	± 1	± 1	± 1	± 1	± 1
10Min	10Min	10Min	10Min	10Min	10Min	10Min	10Min	10Min
20.5Max	20.5Max	20.5Max	20.5Max	20.5Max	20.5Max	20.5Max	20.5Max	20.5Max
4	4	4	4	4	4	4	4	4

11. 訂貨方式 How To Order

如：碳膜固定電阻器 1/2W T52 ±5% 10Ω
Example: CF 1/2W T52 ±5% 10Ω

1 1 R D 0 0 2 T 5 2 J 0 1 0 0

代碼	I
類別	Product

(1)

代碼	008
瓦特數	1/8W
代碼	006
瓦特數	1/6W
代碼	004
瓦特數	1/4W
代碼	002
瓦特數	1/2W
代碼	010
瓦特數	1W
代碼	020
瓦特數	2W
代碼	030
瓦特數	3W
代碼	050
瓦特數	5W

(3)

代碼	Code
含義	Meaning
代碼	T
含義	Tape / Box
代碼	P
含義	Bulk/ Box
代碼	FT
含義	立式編帶
代碼	---
含義	Normal size
代碼	s
含義	Small size
代碼	ss
含義	Super small size
代碼	Extent
含義	Tape width 26mm
代碼	52
含義	Tape width 52mm
代碼	63
含義	Tape width 63mm
代碼	73
含義	Tape width 73mm

(4)

代碼	Code
容許差	Tolerance
代碼	G
容許差	±2%
代碼	J
容許差	±5%

(5)

阻值	Ex.	±2% ±5%
低阻兩位	0.15Ω	R150
個位Ω	1Ω	0109
十位Ω	10Ω	0100
百位Ω	100Ω	0101
個位K	1K	0102
十位K	10K	0103
百位K	100K	0104
個位M	1M	0105
十位M	10M	0106

(6)

代碼	Code
含義	Meaning

(7)

代碼	RD
產品類別	Carbon film fixed resistors

特殊產品預留

12. 使用注意事項 Precautions for Use

12.1 碳膜電阻的導電層主要成分為碳，阻值越高膜層越薄，當阻值高於幾百 K 歐姆時，膜層厚度可能已經達到納米

級，此時產品的可靠性會相對降低，尤其是高濕度的環境下，容易出現偶發性的失效異常。因此，高可靠性

要求的產品設計，請勿為了方便而採用超高阻值。

Carbon film resistor layer of conductive carbon as a main component, the higher resistance film thinner, when high resistance in a few hundred K ohm, film thickness may have reached nanometer level. At this time the reliability of the product will be relatively lower, especially in high humidity environment, prone to occasional abnormal failure. Therefore, the product design of high reliability requirements, do not for convenience using ultra high resistance.

12.2 超高阻值部分建議使用我公司的 MG 厚膜玻璃釉電阻（高功率要求適用）或 CHIP 晶片電阻（低功率要求適用），

MG 電阻高阻段的耐溫、耐濕、耐壓、耐脈沖、耐腐蝕等方面的可靠性是眾電阻產品之首。

Ultra high resistance part recommend the use of our MG High voltage surge resistor or chip resistors to replace the precision metal film resistors, Mg resistor of high temperature, humidity, pressure resistance, pulse, corrosion resistance and other aspects of the reliability is the public resistance.

12.3 低阻及超低阻的碳膜電阻如線路要求耐電流能力要求高時，請參考我公司的 KN 繞線電阻，其在溫度係數、耐脈

沖性能方面有很大的優越性。

Low resistance and ultra low resistance of the carbon film resistance, such as the line requirements of resistance to high current capacity requirements, please refer to our KN Wire Wound Resistors, which has a great advantage in the temperature coefficient, pulse resistance.

12.4 請勿在高阻值碳膜電阻表面使用膠類產品固定或灌封。膠類一方面降低了產品的散熱性能，另一方面整機廠常

用的 AB 膠類如酸性未控制好或未完全乾燥的情況下通電使用，會造成電阻導電膜與酸性分子產生電化學

反應而出現偶發性的失效，俗稱電阻皮膜被“電蝕”。多年的經驗告訴我們，使用環氧膠類比有機硅膠類出現異常的機率會更大。

Do not use plastic products fixed or potting in the high resistance carbon film resistor surface. Glue on the one hand reduces the radiation performance of the product, on the other hand, the whole plant commonly used AB class such as pH do not control or not completely dry the use of electricity, caused by conductive film and acid and alkali resistance molecular produce electrochemical reaction and occasional failure, commonly known as the electric resistance of coating was electrical erosion. Years of experience tells us that the use of epoxy silicone glue analogy abnormality rate will be greater.

12.6 碳膜電阻推出了無腳型產品，可以用 SMT 自動貼片安裝，滿足波峰焊和迴流焊工藝。此款電阻為非切腳型生

產，不存在切腳時端帽出現鬆動的隱患，經過酸洗、電鍍錫等工藝，100%短時間負載測試，可靠性優異。具

體請參考我公司的 MECF-MELF 產品。

The carbon film resistor is introduced with no foot type products, which can be installed with SMT automatic patch, which can satisfy the process of wave soldering and reflow soldering. The resistance of the non cutting foot type production, does not exist when the cut foot cap appears loose hidden danger, after pickling, electroplating tin and other processes, 100% short time load test, excellent reliability. Specific please refer to our MECF-MELF products.



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Carbon Composition Resistors](#) category:

Click to view products by [Tyohm](#) manufacturer:

Other Similar products are found below :

[IBT1/4102JLF](#) [OE5655](#) [OG5625](#) [OB1025](#) [OE1855](#) [OG2005](#) [IBT1/4100JLF](#) [OF-112JE](#) [OH6205](#) [RC0S2CA270RKE](#) [OF224KE](#)
[CF18JT910R](#) [RC20GF240J](#) [RC20GF561J](#) [RC07GF361J](#) [RC1/4435JB](#) [RC1/4135JB](#) [RC1/4201JTD](#) [RC1/2331KTD](#) [RC20GF470JTRLF](#)
[RC1/2155KTD](#) [RC1/4274KTD](#) [RC1/47R5JB](#) [RC1/4565JB](#) [RC1/4160JB](#) [RC1/2475KTB](#) [RC1/2471JTD](#) [RC1/2431JTD](#) [RC1/2334KB](#)
[RC1/2225KB](#) [RC1/2166KTD](#) [RC1/2103KTD](#) [RC1/2102JTD](#) [RC1/2434JB](#) [RC1/22R4JB](#) [RC1/2165JB](#) [RC07GF510JTR](#) [RCC025 2R7 J B](#)
[CFR0W4J0242A10](#) [CFR0W4J0391A50](#) [CFR0W4J0303A50](#) [CFR0W4J0433A50](#) [CFR03SJ0753AA0](#) [CFR03SJ0470AA0](#) [CF1/6W-20K±5%](#)
[T52](#) [CF1/4W-43±5% T52](#) [CFR01SJ0433A10](#) [RD50T5151J](#) [RD 1/8W 33K J T/B A1](#) [RD 2WS 3K6 J T/B A1](#)