

大亞秋田電子科技（深圳）有限公司

精密圆柱状金属膜电阻器



規格：RJM

製造廠商：


大亞秋田電子科技（深圳）
有限公司

使用廠商：

立創

認可	審核	製作
 唐立純		肖明艷

認可	審核	製作

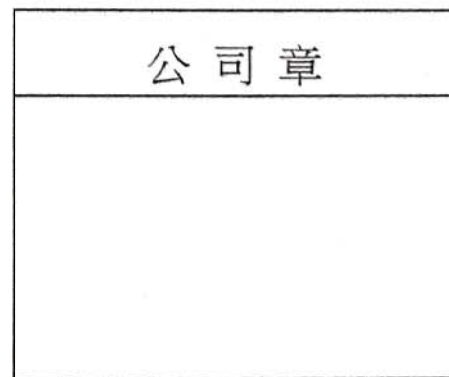


RJM 型精密圆柱状金属膜电阻器

RJM HIGH PRECISION MELF RESISTORS



■ 构造图 CONSTRUCTION (mm)

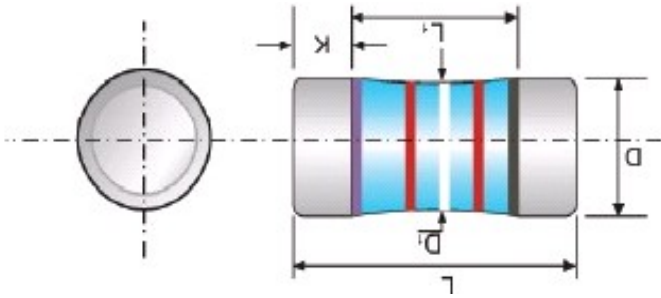

■ 外形尺寸 DIMENSIONS (mm)

尺寸(size)	L±0.3	L1max	D±0.2	D1max	Kmax
RJM73P0102	2.2	1.2	1.1	1.1	0.5
RJM74P0204	3.5	1.7	1.4	1.5	1.0
RJM74M0204	3.5	1.7	1.4	1.5	1.0
RJM75P0207	5.7	3.5	2.2	2.3	2.0
RJM76M0207	5.7	3.5	2.2	2.3	2.0
RJM77M0411	8.7	5.5	3.1	3.3	2.5
RJM78M0617	10.7	6.5	4.1	4.3	3.0

■ 产品特点 FEATURES

- SMD 表面贴装
- 防潮湿多层包装
- 低温度系数
- 高精度、高稳定度
- 可焊性极好的端子
- 采用蓝色或绿色涂料封装，色环标志，编带包装或散装包装

● SMD structure

● Conformal multi-layer coating moisture proof

● Low TCR

● High precision, high stability

● Excellent solderability termination

● Blue or green flame-retardant coating

● Colour Code Taping Reel or Bulk

■ 应用范围 APPLICATIONS

● 适用于电子仪器和仪表，设备，彩电，空调，音响等电器

● 电子衡器

● Electric instruments, equipments, TV, audio, air-conditioning and other

● electrical equipment

● Electronic weighing apparatus

■ 执行标准 REFERENCE STANDARDS

GB/T 5729-2003


SJ/T 10571-1994

SJ/T 10572-1994


SJ/T 10573-1994

SJ/T 10574-1994

TYPE	C (mm)	A (mm)	B (mm)	M (mm)
	RECOMMENDED SOLDER PAD DIMENSIONS			
RJM74P0102	1.2	1.3	1.7	3.0
RJM74P0204	1.6	1.3	1.7	4.2
RJM74M0204	1.6	1.3	1.7	4.2
RJM75P0207	3.1	1.8	2.5	6.8
RJM76M0207	3.1	1.8	2.5	6.8
RJM77M0411	5.1	2.5	3.5	9.5
RJM78M0617	6.1	3.2	4.5	11.9



■ 焊盘尺寸 PAD SIZE

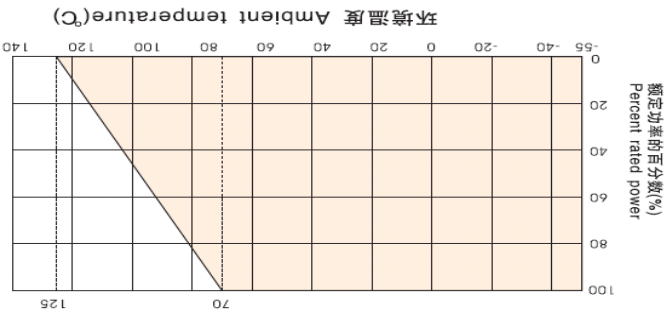

RJM 型精密圆柱状金属膜电阻器

RJM HIGH PRECISION MELF RESISTORS

■ 技术参数 TECHNICAL SPECIFICATIONS

型号 Type	额定功率 (W) Power Rating	最大工作电压 (V) Working Voltage(V)	绝缘电压 (V) Insulate Voltage(V)	阻值范围 Resistance Range(Ω)	电阻温度系数 (+25~85℃) TCR(ppm/℃)	精度 Tolerances	额定功率 环境温度 Power Rating Ambient Temperature	使用温度范围 Operating Temperature
RJM73P0102	0.2	150	200	0.22~1M	±5	±0.05%	-55~70℃	-55~125℃
RJM74P0204	0.25	250	350	0.1~2M	±5	±0.05%	-55~70℃	-55~125℃
RJM74M0204	0.4	250	350	0.1~2M	±10	±0.1%	-55~70℃	-55~125℃
RJM75P0207	0.5	300	500	0.1~22M	±15	±0.25%	-55~70℃	-55~125℃
RJM76M0207	1	350	500	0.1~22M	±25	±0.5%	-55~70℃	-55~125℃
RJM77M0411	2	400	500	0.1~22M	±50	±1%	-55~70℃	-55~125℃
RJM78M0617	3	500	500	0.1~22M	±100	±5%	-55~70℃	-55~125℃

■ 性能指标 PERFORMANCE

试验项目 Test Item	性能要求 Specifications	试验变化 Test method
可焊性 Solderability	≥95%	235±5℃ 2±0.5s
短时过载 Short time overload	$\Delta R \leq \pm(0.5\%R+0.05\Omega)$	2.5V _a , 5s
温度冲击 Thermal shock	$\Delta R \leq \pm(0.5\%R+0.05\Omega)$	-65~150℃, 5cycles
耐焊接热 Leaching	$\Delta R \leq \pm(0.5\%R+0.05\Omega)$	260±10℃, 10±1s
耐湿 Resistance to moisture	$\Delta R \leq \pm(0.5\%R+0.05\Omega)$	-10~65℃, RH>90%, 240H
70℃耐久性 Endurance at 70℃	$\Delta R \leq \pm(1\%R+0.1\Omega)$	70±2℃, P _a 1000H

■ 订货示例 How To Order 例如 Example

RJM74P0204	B	7	T	1001
------------	---	---	---	------

产品型号 Type
RJM73P0102
RJM74P0204
RJM74M0204
RJM75P0207
RJM76M0207
RJM77M0411
RJM78M0617

精度 Tolerance
W:±0.05%
B:±0.1%
C:±0.25%
D:±0.5%
F:±1%
J:±5%

温度系数 TCR
7:±5ppm
6:±10ppm
5:±15ppm
3:±25ppm
2:±50ppm
1:±100ppm

包装方式 Packaging
塑料袋 plastic bags
编带 tape

标称阻值 Nominal Value
1001=1KΩ
1122=11.2KΩ
1R00=1Ω
0R495=0.495Ω
1114=1.11MΩ
2205=22MΩ

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Metal Film Resistors - Through Hole](#) category:

Click to view products by [Tyohm](#) manufacturer:

Other Similar products are found below :

[FRN25J330R](#) [FRN50J1R0S](#) [H4100RBYA](#) [H415RBZA](#) [H41K1BYA](#) [H41K5BYA](#) [H41M0BDA](#) [H420R5BCA](#) [H421R5BZA](#) [H4221RBYA](#)
[H424K3BDA](#) [H442K2BDA](#) [H45K62BZA](#) [H4634RBZA](#) [H473R2BZA](#) [H4931KBZA](#) [H8160KFDA](#) [H8274KBZA](#) [H82K0FDA](#) [H82K0FZA](#)
[H87K5DYA](#) [RLR05C1501GPB14](#) [RLR05C6201GS](#) [RLR20C3240FRB14](#) [RLR20C51R0GMB14](#) [RLR32C7R50FMB14](#) [RNC55H4642FPB14](#)
[HR01623J](#) [HR01682J](#) [270-1.69M-RC](#) [LR0204F110R](#) [LR0204F18R](#) [LR0204F20K](#) [LR0204F20R](#) [LR0204F510R](#) [LR1F121R](#) [LR1F133K](#)
[LR1F383R](#) [LR1F3K01](#) [LR1F4K75](#) [LR2F330RJIT](#) [LR2F51R](#) [LR2F910R](#) [ERX-2SZJR20E](#) [SQMR74K7J](#) [FMF-25FTF52-100K](#)
[FRN50J100RS](#) [FRN50J470RS](#) [H4100RBZA](#) [H414R3BZA](#)