

CAxxxx Cables

Technical Datasheet

CA0001



For LWC-L Battery (UBBL01)	
Battery Connector	LEMO FGG 0B 305 CLA
Cable Length	CA0001: 61 cm. (24 in.) nominal CA0001-01: 100 cm. (39.36 in.) nominal CA0001-02: 200 cm. (78.74 in.) nominal
Cable Type	2 Conductor; 22 AWG; red positive, black negative
Insulation	Foil shielded black PVC

CA0002






For UBI-2590 Battery (UBBL02-01, UBBL02-01-CB, UBBL10-01, UBBL10-01-CB, UBBL13-01, **UBBL13-01-CB, UBBL18, UBBL38, UBBL62)**

Cable Length	CA0002: 61 cm. (24 in.) nominal CA0002-01: 100 cm. (39.36 in.) nominal CA0002-02: 200 cm. (78.74 in.) nominal CA0002-03: 183 cm. (72.00 in.) nominal
Cable Type	4 Conductor; 18 AWG
Pin/Wire Color Key	Pin 1 Black, Pin 2 White, Pin 4 Red, Pin 5 Green
Insulation	Black type SJOOW rubber

CA0002P-XX





Cable Length


For UBI-2590 Battery (UBBL02-01, UBBL02-01-CB, UBBL10-01, UBBL10-01-CB, UBBL13-01, **UBBL13-01-CB, UBBL18, UBBL38, UBBL62)**

	CA0002P-02: 200 cm. (78.74 in.) nominal CA0002P-03: 183 cm. (72.00 in.) nominal CA0002P-04: 61 cm. (24.00 in.) nominal
Cable Type	4 Conductor; 18 AWG
Pin/Wire Color Key	Pin 1 Black, Pin 2 White, Pin 4 Red, Pin 5 Green
Insulation	Black type SJOOW rubber

CA0002P-01: 100 cm. (39.37 in.) nominal

CA0005






Insulation

For UBBL03 Battery (Type LI-7)	
Battery Connector	JBXFD1G05MCSDSMR
Cable Length	CA0005: 61 cm. (24 in.) nominal CA0005-01: 100 cm. (39.36 in.) nominal CA0005-02: 200 cm. (78.74 in.) nominal
Cable Type	5 Conductor, 20 AWG
Pin/Wire Color Key	Pin 1 Red, Pin 2 Green, Pin 3 White, Pin 4 Black, Pin 5 Blue

Foil shielded black PVC

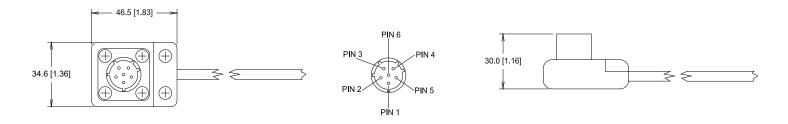

CA0006: 24V



For UBI-2590 Battery (UBBL02-01, UBBL02-01-CB, UBBL10-01, UBBL10-01-CB, UBBL13-01, UBBL13-01-CB, UBBL18, UBBL62)

Cable Length	CA0006: 61 cm. (24 in.) nominal CA0006-01: 100 cm. (39.36 in.) nominal CA0006-02: 200 cm. (78.74 in.) nominal
Cable Type	24V, 2 Conductor; 18 AWG
Pin/Wire Color Key	Pin 4 White/positive, Pin 2 Black/negative
Insulation	Black type SJ rubber

CA0007: 12V




For UBI-2590 Battery (UBBL02-01, UBBL02-01-CB, UBBL10-01, UBBL10-01-CB, UBBL13-01, **UBBL13-01-CB, UBBL18, UBBL38, UBBL62)**

Cable Length	CA0007: 61 cm. (24 in.) nominal CA0007-01: 100 cm. (39.36 in.) nominal CA0007-02: 200 cm. (78.74 in.) nominal
Cable Type	12V, 2 Conductor; 18 AWG
Pin/Wire Color Key	Pins 4 & 5 White/Positive, Pins 1 & 2 Black/Negative
Insulation	Black type SJOOW rubber

CA0008:12/24V





For UBI-2590 Battery (UBBL02-01, UBBL02-01-CB, UBBL10-01, UBBL10-01-CB, UBBL13-01, **UBBL13-01-CB, UBBL18, UBBL38, UBBL62)**

Cable Length	CA0008: 61 cm. (24 in.) nominal CA0008-01: 100 cm. (39.36 in.) nominal CA0008-02: 200 cm. (78.74 in.) nominal
Cable Type	12/24V, 4 Conductor; 18 AWG
Pin/Wire Color Key	Pin 1 Black, Pin 2 White, Pin 4 Red, Pin 5 Gray
Insulation	Black type SJ rubber

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for DC Power Cords category:

Click to view products by Ultralife manufacturer:

Other Similar products are found below:

2R6006A20A120 172-4000 172-4101 172-7443-E 21033836407 2J-1865A 2R7006A20A120 426055400-3 MN47A4BC01M010 H-OU-2
CA0002 420680840-3 426451500-3 P162PT4-36 1-832692-4 FJ-VSP 3M 96CB-POWER-B-1.8M2 426040200 CA0006 H-OU-27
1700019464 FJ-VSP 10M MN47B4BC01M040 H-OU-20 2-836917-8 867566-1 804001P03M050G 2050KH1-BK 58257-1069 2166030037 1011147 1011324 1012028 BXC-10567 172-2555 32102-022800-200-RS P29000-M2 P29004-M2 DC.CAB.0201.0150
DC.CAB.0301.0150 DC.CAB.0610.0150 DC.CAB.0700.0150 DC.CAB.1000.0150 DC.CAB.1000.0300 DC.CAB.1100.0150
DC.CAB.1400.0150 DC.CAB.1410.0150 DC.CAB.1500.0150 DC.CAB.1811.0150 DC.CAB.1900.0150