

UHR-CR26500

Technical Datasheet



Technical Specifications	
Part No.	U10017, U10018, U10019, U10020
NSN	6135-01-582-5987 (U100017 only)
Voltage Range	1.5 to 3.3V
Average Voltage	3.0V
Nominal Capacity	4.8Ah @ 150mA to 2.0V @ 23°C
Max. Discharge	2.0A continuous
Pulse Capability	Up to 4.2A Varies according to pulse characteristics, temperature, cell history and the application. Consult Ultralife.
PTC	U10018 and U10020 have PTC (re-settable fuse) 10017 and U10019 do NOT
Weight	61.0g
Operating Temperature	-40°C to 72°C
Storage Temperature	-40°C to 95°C
Exterior/Housing	Hermetic Ni-plated steel can. End caps, tabs and insulating sleeve.
Terminals/Connector	Flat Ni-plated +/- End Caps: U10017 and U10018 Flat Ni-plated +/- End Caps with Nickel Tabs: U10019 and U10020
Safety	UL component recognized Material Safety Datasheet - MSDS023 Safety Guide UBM-5135
Transportation	Class 9 - U.S. and International (see note)
Note	A complete description of transportation regulations, lithium weights and transportation classifications is available on the Ultralife website.


Features

- High energy density
- No voltage delay
- Wide operating temperature range
- Lightweight
- Up to 10-year shelf life
- Long operating life
- Cell is hermetically sealed Ni-plated steel can





Applications

- Consumer telematics
- Commercial telematics
- Search & rescue devices
- Military communications, detectors & imaging
- Medical devices

Dimensions

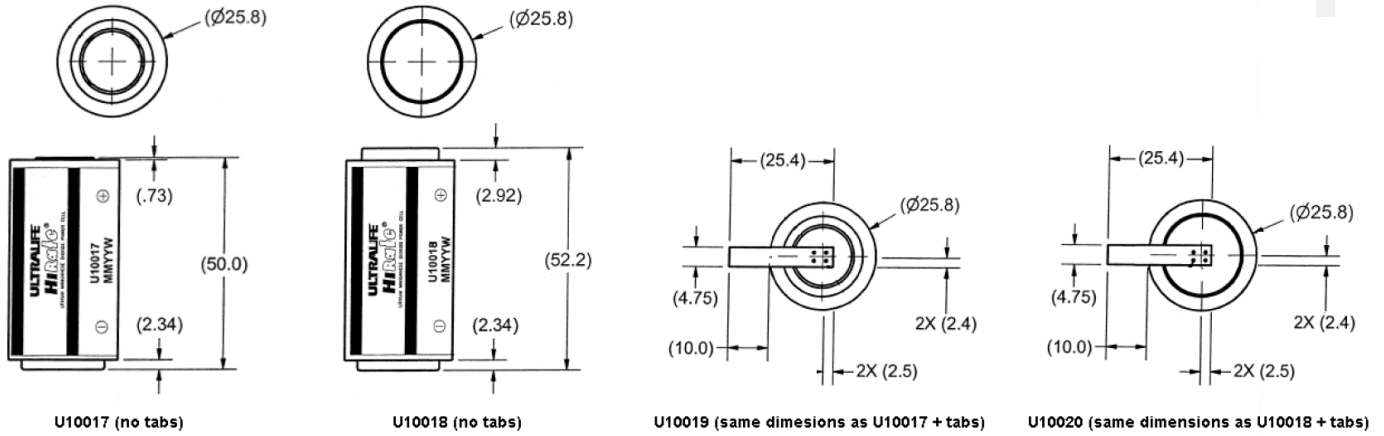

Performance Graphs

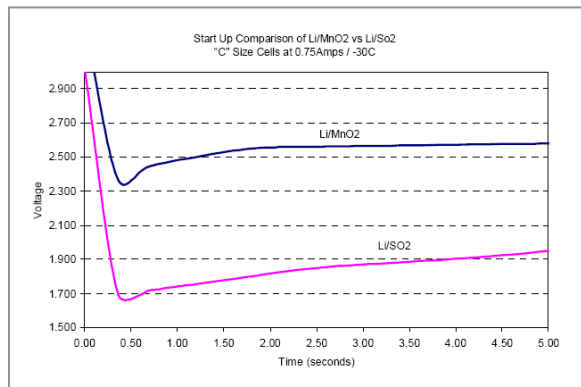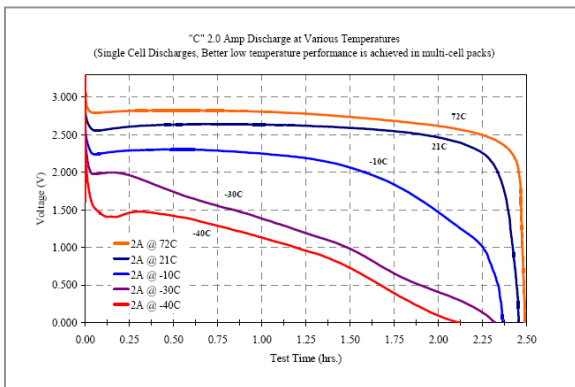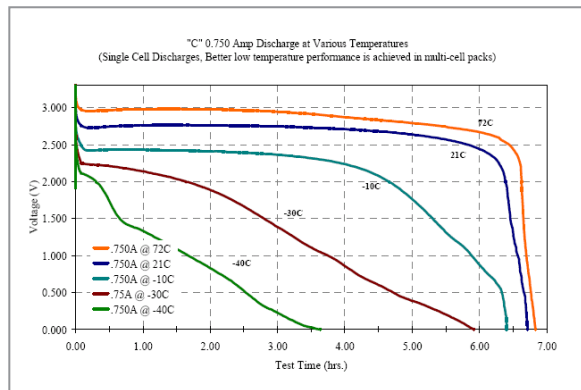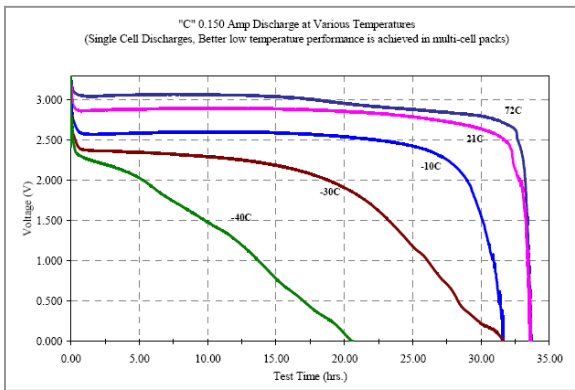

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Electronic Battery](#) category:

Click to view products by [Ultralife](#) manufacturer:

Other Similar products are found below :

[R88A-BAT02W](#) [TL5902/T](#) [TL-5104/SBP](#) [E300781900](#) [E300782100](#) [1200297](#) [BR-435/BN](#) [B73180A0101M199](#) [13299-0001](#) [R88A-BAT01G](#) [R88A-BAT01W](#) [G4BATT32](#) [M4T32-BR12SH6](#) [LR03AD/4P](#) [13331-0001](#) [ER14505](#) [ER14250](#) [3G2A9BAT08](#) [LR03AD/B](#)
[LR20AD/B](#) [036506R](#) [BR-2/3ASSPN](#)