



				TOLERANCE		UMax conn 东莞市友贸实业有限公司 DONGGUAN UMAX ENTERPRISE LIMITED		TITLE: DDR5 DIMM 0.85MM PITCH 288 CKTS VERT SMT						
				LINEAR	ANGLES			PART NO. 20192-XXXX-XX						
				X ± 0.40	X° ± 5°	APPD: Jason	MAT'L:	DWG NO. C-20192		UNITS	SCALE	SHEET	REV	
				.X ± 0.30	.X° ± 3°	CHKD: Schumi	FINISH:				MM	1 : 1	1 OF 4	0
REV	ECN NO.	NAME	DATE	.XX ± 0.20	.XX° ± 3°	DRWN: Lei Songping	Q' TY:							
				.XXX ± 0.10	.XXX° ± 1°									

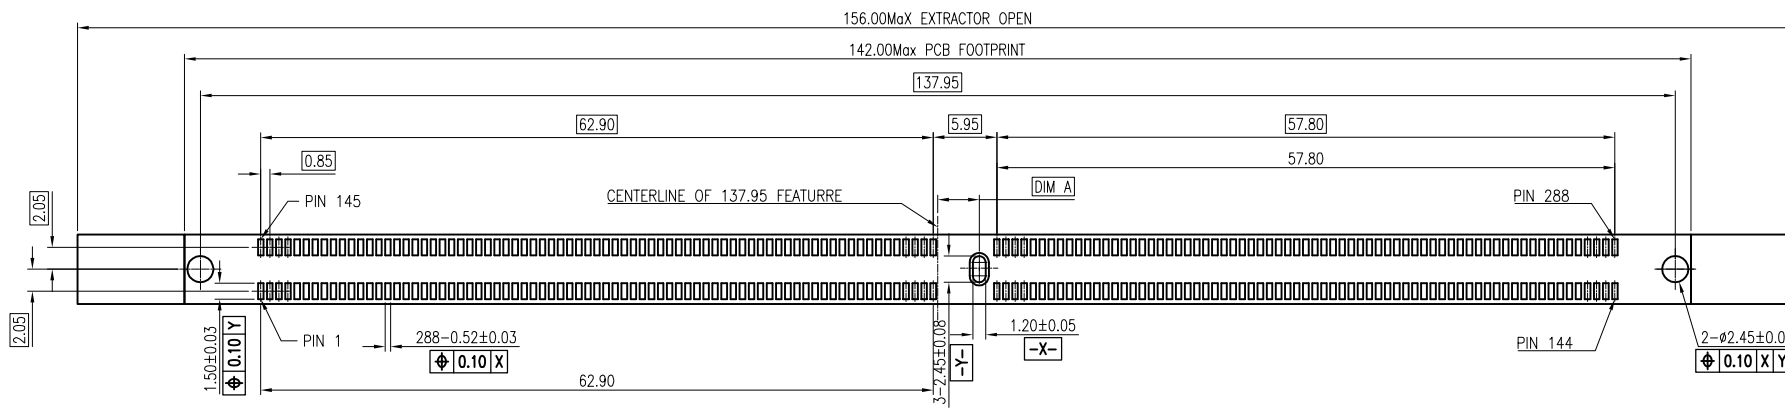


RECOMMENDED PCB LAYOUT 1(TOL.:±0.05)

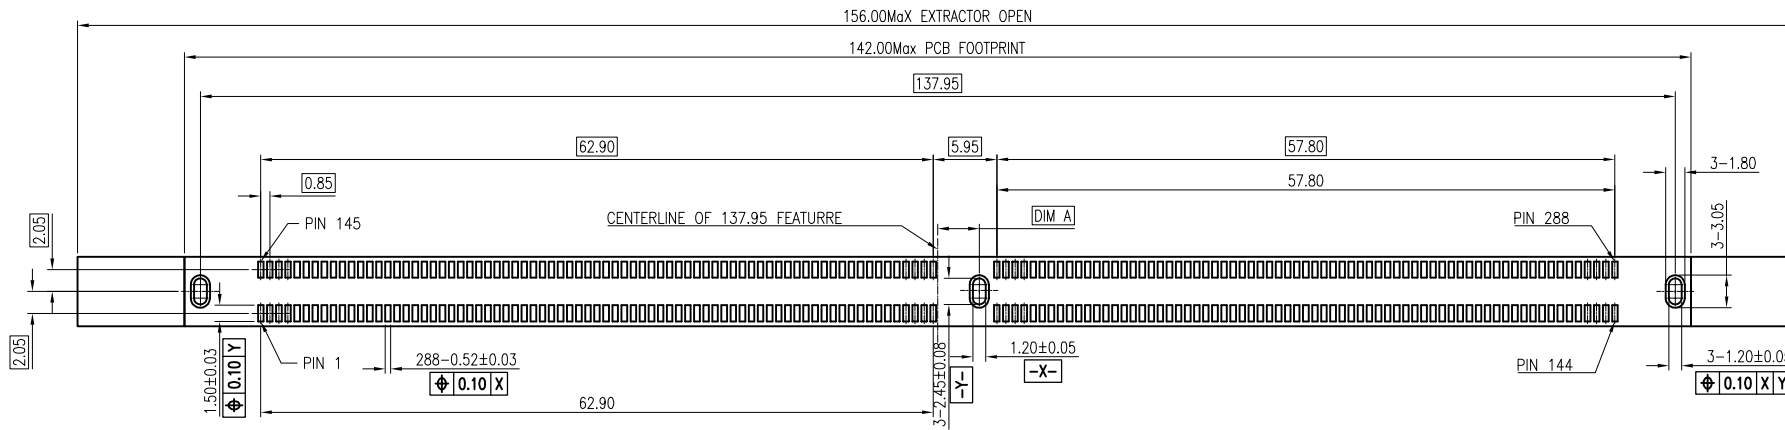

RECOMMENDED PCB LAYOUT 2(TOL.:±0.05)

1.425	UDIMM
3.875	R/LR DIMM
DIM. A	MAKE TYPE

REV	ECN NO.	NAME	DATE	TOLERANCE		UMax conn 东莞市友贸实业有限公司 DONGGUAN UMAX ENTERPRISE LIMITED	TITLE:					
				LINEAR	ANGLES		DDR5 DIMM 0.85MM PITCH 288 CKTS VERT SMT					
				X ± 0.40	X° ± 5°	APPD:	Jason	MAT'L:	PART NO. 20192-XXXX-XX			
				.X ± 0.30	.X° ± 3°	CHKD:	Schumi	FINISH:	DWG NO. C-20192			
				.XX ± 0.20	.XX° ± 3°	DRWN:	Lei Songping	Q'TY:	UNITS	SCALE	SHEET	REV
				.XXX ± 0.10	.XXX° ± 1°				MM	1 : 1	2 OF 4	0

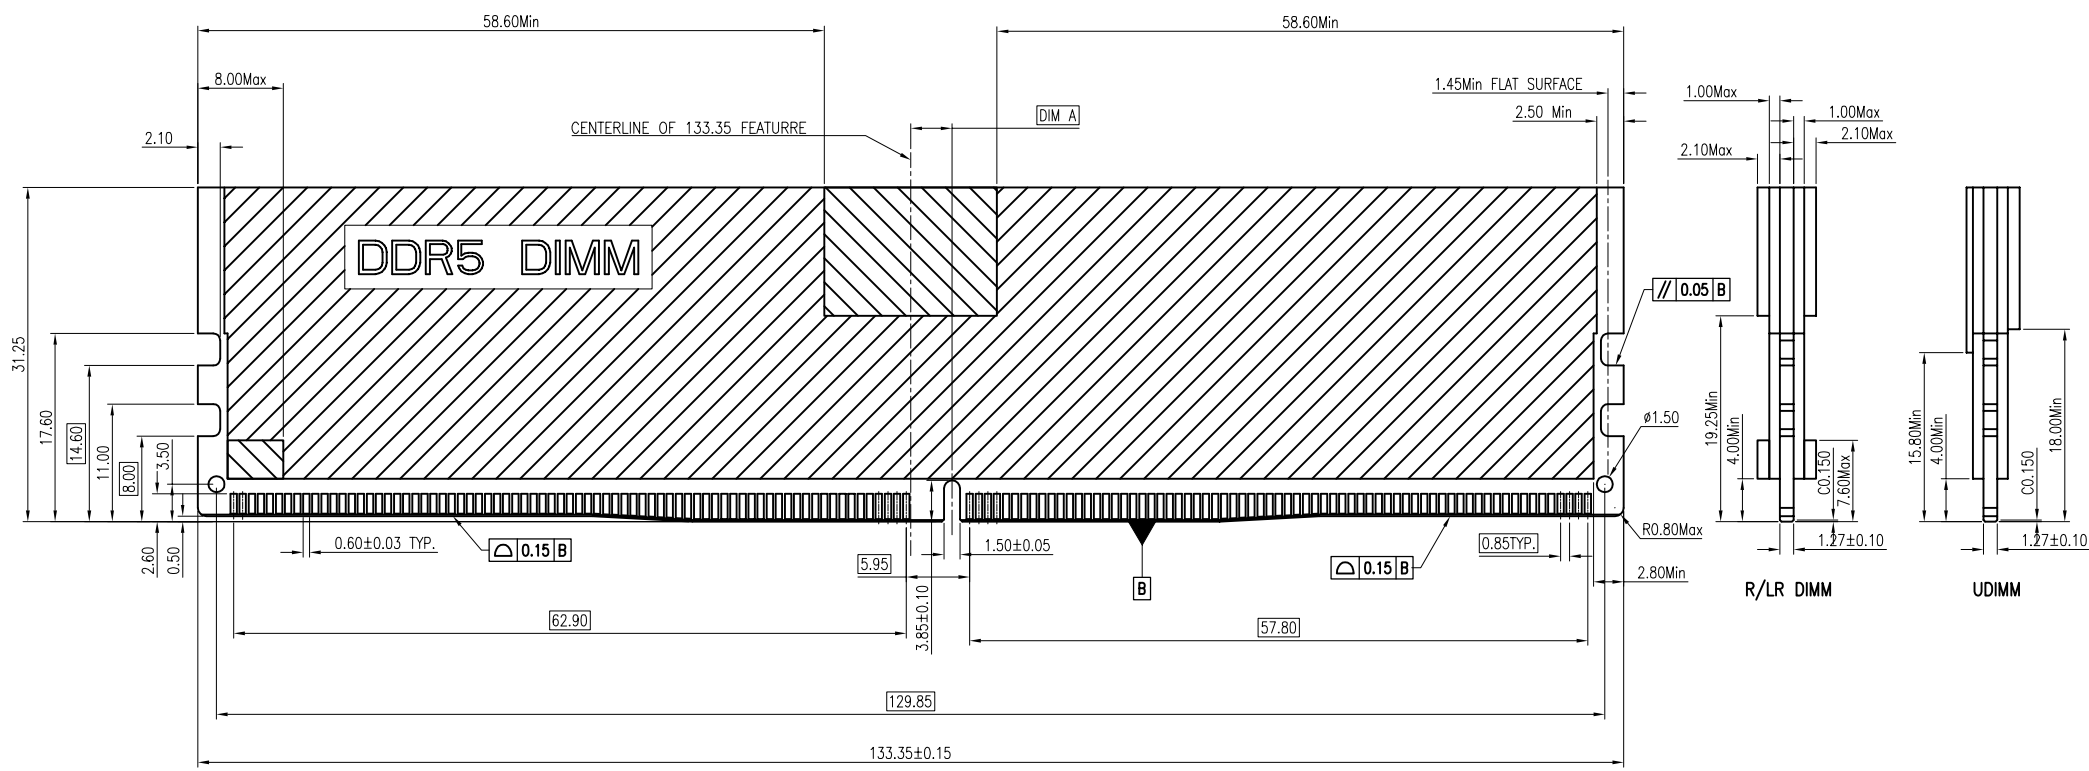

				TOLERANCE		UMax conn 东莞市友贸实业有限公司 DONGGUAN UMAX ENTERPRISE LIMITED		TITLE: DDR5 DIMM 0.85MM PITCH 288 CKTS VERT SMT					
				LINEAR	ANGLES			PART NO. 20192-XXXX-XX					
				X ± 0.40	X° ± 5°	APPD: Jason	MAT'L:	DWG NO. C-20192		UNITS	SCALE	SHEET	REV
				.X ± 0.30	.X° ± 3°	CHKD: Schumi	FINISH:	MM		1 : 1	3 OF 4	0	
				.XX ± 0.20	.XX° ± 3°	DRWN: Lei Songping	Q' TY:						
REV	ECN NO.	NAME	DATE	.XXX ± 0.10	.XXX° ± 1°								

NOTES:

1. MATERIAL:

HOUSING: HIGH TEMPERATURE NYLON UL 94 V-0, HF; COLOR: OPTIONS.
 EJECTOR: HIGH TEMPERATURE NYLON UL 94 V-0, HF; COLOR: OPTIONS.
 TERMINAL: COPPER ALLOY T=0.20
 TAB SIDE: STAINLESS STEEL T=0.40.

2. FINISH:

TERMINAL:
 CONTACT AREA: SELECTED GOLD PLATING;
 SOLDERING AREA: MATTE-TIN 80~160u" PLATING;
 UNDER PLATING: NICKEL PLATING 50u" Min OVERALL
 TAB SIDE& FORK LOCK:
 MATTE-TIN 80~160u" PLATING, NICKEL PLATING 50u" Min OVERALL

3. MECHANICAL CHARACTERISTICS:

CONTACT RETENTION FORCE:0.30Kgf MIN. PER PIN
 DURABILITY:25 CYCLES,
 UNMATING FORCE:19.77N Min
 INSERTION FORCE:106.8N Max

4. ELECTRICAL CHARACTERISTICS:

CONTACT CURRENT RATING:1.0 AMPS Max
 INSULATION RESISTANCE:1MEGOHMS Min AT500ADC
 DIELECTRIC WITHSTANING VOLTAGE:500VAC AT SEA LEVEL.
 LOW LEVEL CONTACT RESISTANCE:INITIAL:30MILLIOHMS MAX.FINAL:30 MILLIOHMS

MAX.

5. RECOMMENDED PROCESS:

THE PEAK TEMPERATURE ON THE BOARD SHALL
 BE MAINTAINED FOR 10±0.5 SECONDS AT 260±5 °C.

PART NO..

20192-X XX X X 0 X

MAKE TYPE.

- 1: DDR5(R DIMM)
- 2: DDR5 UDIMM

CONTACT

- AREA PLATING
- 15: 15u" Au
 - 30: 30u" Au

HOUSING COLOR


- 1: BLACK
- 2: NATURAL
- 3: BLUE

PACKAGING OPTIONS

- T: TRAY WITHOUT CAP
- M: TRAY WITH MYLAR
- C: TRAY WITH CAP

LATCH COLOR

- 1: BLACK
- 2: NATURAL
- 3: BLUE

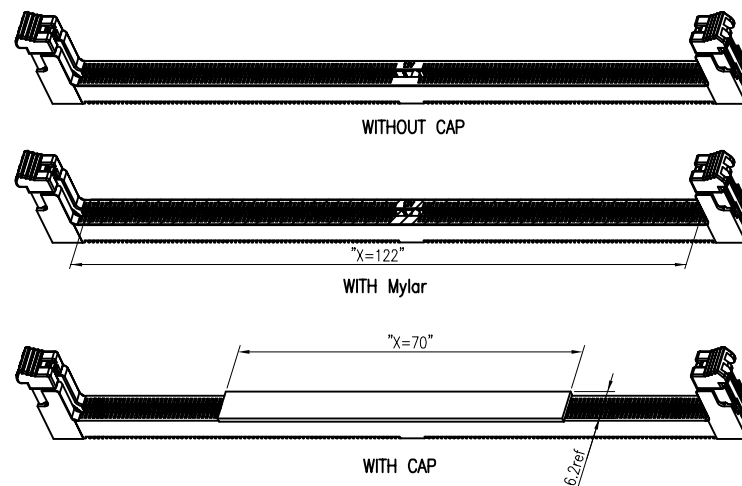

				TOLERANCE		UMax conn 东莞市友贸实业有限公司 DONGGUAN UMAX ENTERPRISE LIMITED		TITLE: DDR5 DIMM 0.85MM PITCH 288 CKTS VERT SMT			
				LINEAR	ANGLES			PART NO. 20192-XXXX-XX			
				X ± 0.40	X° ± 5°	APPD: Jason	MAT'L:	DWG NO. C-20192			
				.X ± 0.30	.X° ± 3°	CHKD: Schumi	FINISH:	UNITS SCALE SHEET REV			
				.XX ± 0.20	.XX° ± 3°	DRWN: Lei Songping	Q' TY:	MM	1 : 1	4 OF 4	0
REV	ECN NO.	NAME	DATE	.XXX ± 0.10	.XXX° ± 1°						

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [DIMM Connectors](#) category:

Click to view products by [UMAX](#) manufacturer:

Other Similar products are found below :

[1-1932649-2](#) [296409204002856+](#) [5390471-1](#) [10079248-10202LF](#) [2309407-3](#) [10037402-11207LF](#) [10052286-13308LF](#) [10083950-10007](#)
[10124632-0101103LF](#) [10124632-0201001LF](#) [10124632-0202001LF](#) [56441-30007LF](#) [1-1473776-7](#) [XDAP-4042044-20401](#) [78035-0001](#)
[78035-0301](#) [78315-0011](#) [78730-1002](#) [78726-1002](#) [10078239-11103LF](#) [2013311-1](#) [4-1932000-8](#) [10079192-11102LF](#) [10116658-052FSLF](#)
[10116658-152FSLF](#) [1-1735413-1](#) [1-1735438-1](#) [2013310-1](#) [2013289-1](#) [390111-1](#) [390112-1](#) [878030102](#) [879180202](#) [78373-0011](#) [2308107-1](#)
[2309411-1](#) [5-1746530-4](#) [2309408-1](#) [2309412-1](#) [2309407-1](#) [SODIMM-204](#) [FCN-074J240-G/1D](#) [10081530-12208LF](#) [151080-0001](#) [78321-](#)
[0001](#) [78726-1004](#) [87705-1053](#) [10005639-11109LF](#) [10005639-12207LF](#) [10033853-252FSLF](#)