


# Internal lock rings pliers, bent

538PLUS/1DP

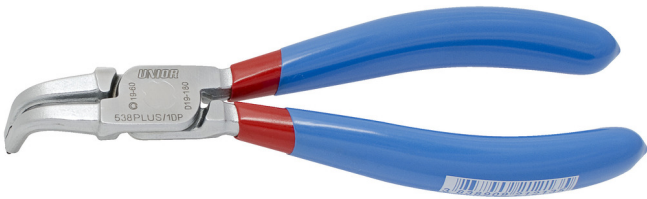

## Profiles

---



## Product features


- material: premium plus carbon steel
- drop forged, entirely hardened and tempered
- head polished
- surface finish: chrome plated to standard ISO 1456:2009
- tips black finish
- double plastic dipped handles
- made according to standard DIN 5256 form D

## Advantages:

- 30% higher endurance in comparison to convenient lock rings pliers
- for diameter 8 to 100mm
- with inserted tips

## Usage:




- **for fitting circlips on bore holes**

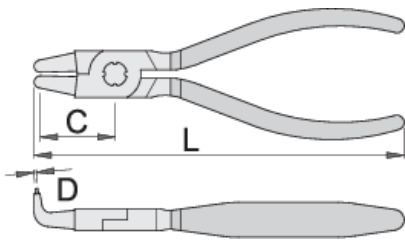

			L	D	C	
621211	140	8 - 13	128	0.9	28	114
621212	140	12 - 25	128	1.3	28	114
621213	180	19 - 60	166	1.8	38	194
621214	220	40 - 100	202	2.3	48	244

\* Images of products are symbolic. All dimensions are in mm, and weight in grams. All listed dimensions may vary in tolerance.

### Usage (pictures)



Tips hardened to 58 HRC prevent bending or breaking during the removal or insertion of circlips

The tips are inserted into the jaw at an angle that prevents the circlip from sliding off the tips

### Related products

External lock rings pliers, straight

External lock rings pliers, bent

Internal lock rings pliers, straight

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Pliers & Tweezers](#) category:*

*Click to view products by [UNIOR](#) manufacturer:*

Other Similar products are found below :

[0026](#) [T0058765801](#) [80](#) [76C](#) [378MN](#) [L4VN](#) [LN54VN](#) [NN7776VN](#) [54CGVN](#) [SN55VN](#) [DRP10N](#) [0036](#) [PN 5050/21D](#) [505BGC](#) [622TX](#)  
[43450](#) [8150 CO](#) [8165 CO](#) [32BSA25](#) [5BSAF](#) [017610101](#) [PN 5025](#) [65516300](#) [YT-2469](#) [011640100](#) [010480315](#) [503 618 3](#) [PGT435](#) [T3653](#)  
[250](#) [5000522](#) [011770113](#) [011770101](#) [CPE.A4](#) [T3781](#) [189A.17VE](#) [PPR 5003 D](#) [131 010 2](#) [40603GP](#) [011780102](#) [45705](#) [CPES](#) [6151](#)  
[181A.18CPE](#) [391A.16VE](#) [181EF.25CPEPB](#) [011640096](#) [CPE.A1PB](#) [SS406-160](#) [192A.18VE](#) [8000 0001 0 0](#)