

Insulated adjustable wrench

250/1VDP



Profiles



Standards

DIN EN IEC 60900 (VDE 0682-201):2019-04; EN IEC 60900:2018

Product features

- material: premium chrome vanadium steel
- surface finish: chrome plated according to ISO 1456:2009
- made according to standard ISO 6787 and EN IEC 60900:2018

Advantages:


- double layered - double coloured insulation for additional safety
- controlled according to standard EN IEC 60900
- with scale

Important!

- if second layer is visible, replace your insulated tool with a new one.

Caution!



- Adjust the tool before using! Adjustment while working is life dangerous.

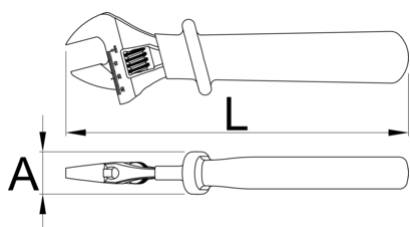


		L	A		
621917	150	165	25	19	182
616849	200	210	31	24	355
616850	250	260	31	27	579
616851	300	310	32	34	871
622065	380	390	37	41	1505

* Images of products are symbolic. All dimensions are in mm, and weight in grams. All listed dimensions may vary in tolerance.


Usage (pictures)

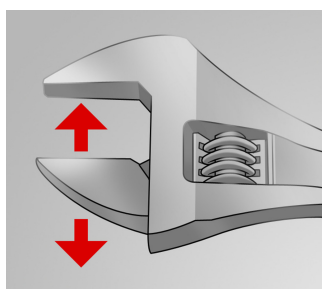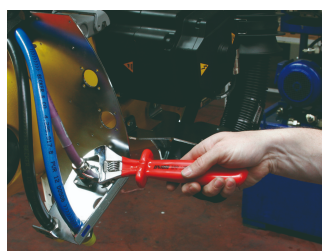


The adjustable jaw

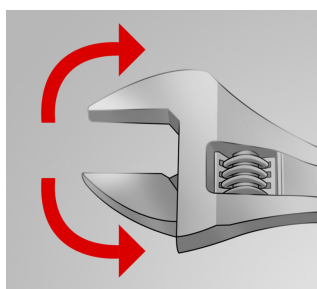

The wrench sustains both directions of rotation



Toothed adjustable screw



Measuring scale

Spare parts



Spare parts for adjustable wrench 250/1, 250/1A

Safety tips



- Discard any wrench with a spread or damaged fixed jaw or a bent handle

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Spanners](#) category:

Click to view products by [UNIOR](#) manufacturer:

Other Similar products are found below :

[74008](#) [1406504-3](#) [1406504-4](#) [1406504-5](#) [1725859-2](#) [9965](#) [1055267-1](#) [1-1406504-0](#) [TG70-24](#) [TG70-18](#) [R282320031](#) [1055512-1](#) [1055276-1](#)
[R282303020](#) [TOL-222901](#) [523200-4](#) [TOL-171801](#) [1490262-2](#) [9968](#) [1302340394](#) [AC24VS](#) [R282340000](#) [BT-BS-609WT](#) [BT-BS-610R](#) [BT-](#)
[BS-610RT](#) [R282320030](#) [BT-ST-302D](#) [1031-27R](#) [1031-34R](#) [1060-29](#) [1067-10](#) [1067-27](#) [1067-32](#) [1071-48](#) [10F0-26P](#) [10F0-32P](#) [10F0-55P](#) [0-](#)
[90-947](#) [0-90-949](#) [40080606](#) [40082626](#) [40093232](#) [50184065](#) [58211008](#) [58211011](#) [58211013](#) [58211014](#) [58211015](#) [58211016](#) [58211019](#)