



**UNI-ROYAL**  
厚聲集團

# DATA SHEET

**Product Name** High Voltage Thick Film Chip Resistors

---

**Part Name** HV Series

## **Uniroyal Electronics Global Co., Ltd.**

88#, Longteng Road, Economic & Technical Development Zone, Kunshan, Jiangsu, China

Tel +86 512 5763 1411 / 22 /33

Email [marketing@uni-royal.cn](mailto:marketing@uni-royal.cn)

Manufacture Plant Uniroyal Electronics Industry Co., Ltd.

Aeon Technology Corporation

Royal Electronic Factory (Thailand) Co., Ltd.

Royal Technology (Thailand) Co., Ltd.

## 1 Scope

- 1.1 This datasheet is the characteristics of High Voltage Thick Film Chip Resistors manufactured by UNI-ROYAL.
- 1.2 The performance in Max. Working Voltage is superior to the general thick film chip resistors.
- 1.3 Suitable for reflow & wave soldering
- 1.4 Applications: AV adapters, LCD backlight, Camera flash, etc.

## 2 Part No. System

Part No. includes 14 codes shown as below:

- 2.1 1<sup>st</sup>~4<sup>th</sup> codes: Part name. E.g.: HV03, HV05, HV06, HV07, HV10, HV12
- 2.2 5<sup>th</sup>~6<sup>th</sup> codes: Power rating.

|                     |                |     |     |     |     |     |      |      |      |    |
|---------------------|----------------|-----|-----|-----|-----|-----|------|------|------|----|
| E.g.: W=Normal Size | "1~G" = "1~16" |     |     |     |     |     |      |      |      |    |
| Wattage             | 1/32           | 3/4 | 1/2 | 1/3 | 1/4 | 1/8 | 1/10 | 1/16 | 1/20 | 1  |
| Normal Size         | WH             | 07  | W2  | W3  | W4  | W8  | WA   | WG   | WM   | 1W |

If power rating is equal or lower than 1 watt, 5<sup>th</sup> code would be "W" and 6<sup>th</sup> code would be a number or letter.

E.g.: WA=1/10W                      W4=1/4W

- 2.3 7<sup>th</sup> code: Tolerance. E.g.: D=±0.5%              F=±1%                      G=±2%                      J=±5%                      K= ±10%

- 2.4 8<sup>th</sup>~11<sup>th</sup> codes: Resistance value.

2.4.1 If value belongs to standard value of E-24 series, the 8<sup>th</sup> code is zero, 9<sup>th</sup>~10<sup>th</sup> codes are the significant figures of resistance value, and the 11<sup>th</sup> code is the power of ten.

2.4.2 If value belongs to standard value of E-96 series, the 8<sup>th</sup>~10<sup>th</sup> codes are the significant figures of resistance value, and the 11<sup>th</sup> code is the power of ten.

- 2.4.3 11<sup>th</sup> codes listed as following:

0=10<sup>0</sup>    1=10<sup>1</sup>              2=10<sup>2</sup>    3=10<sup>3</sup>    4=10<sup>4</sup>    5=10<sup>5</sup>    6=10<sup>6</sup>    J=10<sup>-1</sup>    K=10<sup>-2</sup>    L=10<sup>-3</sup>    M=10<sup>-4</sup>

- 2.5 12<sup>th</sup>~14<sup>th</sup> codes.

2.5.1 12<sup>th</sup> code: Packaging Type. E.g.: B = Bulk / Box    T=Tape/Reel

- 2.5.2 13<sup>th</sup> code: Standard Packing Quantity.


4=4,000pcs              5=5,000pcs              C=10,000pcs              D=20,000pcs              E=15,000pcs  
 Chip Product: BD=B/B-20000pcs              TC=T/R-10000pcs

- 2.5.3 14<sup>th</sup> code: Special features.

E = Environmental Protection, Lead Free, or Standard type.

## 3 Ordering Procedure

(Example: HV06 1/4W ±1% 100KΩ T/R-5000)

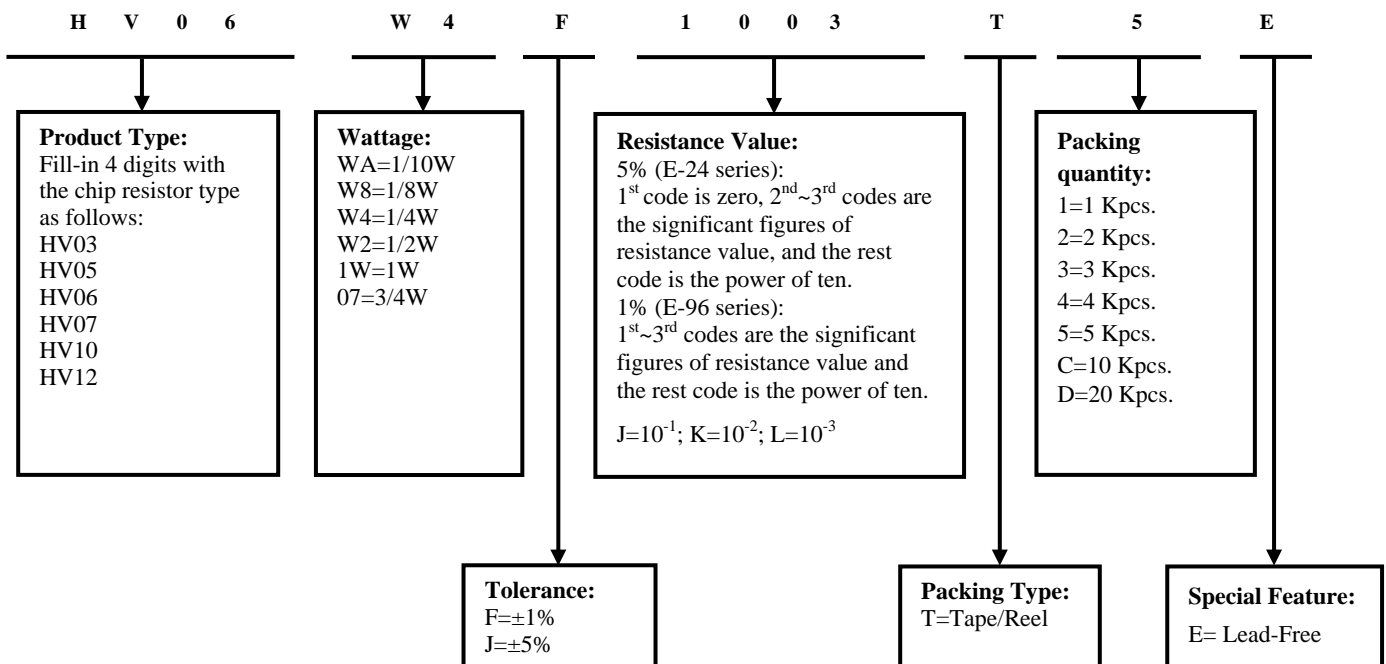

## 4 Marking

4.1 ±5% tolerance products (E-24 series):

3 codes.

1<sup>st</sup>~2<sup>nd</sup> codes are the significant figures of resistance value, and the rest code is the power of ten.



104 → 100KΩ

4.2 ±1% tolerance products (E-96 series):

4 codes.

1<sup>st</sup>~3<sup>rd</sup> codes are the significant figures of resistance value, and the rest code is the power of ten.


Letter "R" in mark means decimal point.



1003 → 100KΩ

## 5 Dimension

| Type       | Dimension(mm) |  |           |           |           |
|------------|---------------|--|-----------|-----------|-----------|
|            | L             | W                                      | H         | A         | B         |
| HV03(0603) | 1.60±0.10     | 0.80±0.10                              | 0.45±0.10 | 0.30±0.20 | 0.30±0.20 |
| HV05(0805) | 2.00±0.15     | 1.25 <sup>+0.15</sup> <sub>-0.10</sub> | 0.55±0.10 | 0.40±0.20 | 0.40±0.20 |
| HV06(1206) | 3.10±0.15     | 1.55 <sup>+0.15</sup> <sub>-0.10</sub> | 0.55±0.10 | 0.45±0.20 | 0.45±0.20 |
| HV07(1210) | 3.10±0.10     | 2.60±0.20                              | 0.55±0.10 | 0.50±0.25 | 0.50±0.20 |
| HV10(2010) | 5.00±0.10     | 2.50±0.20                              | 0.55±0.10 | 0.60±0.25 | 0.50±0.20 |
| HV12(2512) | 6.35±0.10     | 3.20±0.20                              | 0.55±0.10 | 0.60±0.25 | 0.50±0.20 |

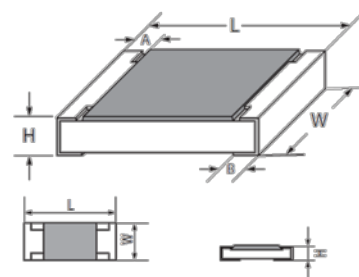


## 6 Ratings

| Type | Power Rating at 70°C | Max. Working Voltage | Max. Overload Voltage | Dielectric withstanding Voltage | Resistance Range | Operating Temperature |
|------|----------------------|----------------------|-----------------------|---------------------------------|------------------|-----------------------|
| HV03 | 1/10W                | 200V                 | 400V                  | 300V                            | 36KΩ~10MΩ        | -55°C~155°C           |
| HV05 | 1/8W                 | 400V                 | 800V                  | 500V                            | 100KΩ~10MΩ       | -55°C~155°C           |
| HV06 | 1/4W                 | 500V                 | 1000V                 | 500V                            | 100KΩ~10MΩ       | -55°C~155°C           |
| HV07 | 1/2W                 | 800V                 | 1500V                 | 500V                            | 50KΩ~10MΩ        | -55°C~155°C           |
| HV10 | 3/4W                 | 2000V                | 3000V                 | 500V                            | 50KΩ~10MΩ        | -55°C~155°C           |
| HV12 | 1W                   | 3000V                | 4000V                 | 500V                            | 39KΩ~10MΩ        | -55°C~155°C           |

## 7 Soldering pad size recommended

| Type | Dimension(mm) |           |          |          |
|------|---------------|-----------|----------|----------|
|      | A             | B         | C        | D        |
| HV03 | 0.8±0.05      | 0.65±0.05 | 0.8±0.05 | 2.1±0.05 |
| HV05 | 1.0±0.1       | 1.0±0.1   | 1.3±0.1  | 3.0±0.1  |
| HV06 | 2.2±0.1       | 1.1±0.1   | 1.6±0.1  | 4.4±0.1  |
| HV07 | 2.1±0.1       | 1.1±0.1   | 2.6±0.1  | 4.4±0.1  |
| HV10 | 3.6±0.1       | 1.3±0.1   | 2.6±0.1  | 6.2±0.1  |
| HV12 | 5.0±0.1       | 1.6±0.1   | 3.3±0.1  | 8.2±0.1  |

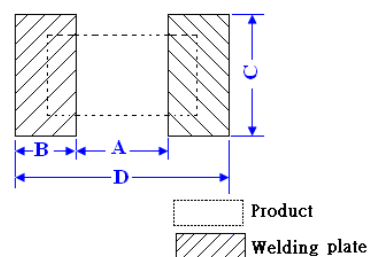

## 8 Derating Curve

Power rating will change based on continuous load at ambient temperature from -55 to 155°C.

It is constant between -55 to 70°C, and derate to zero when temperature rise from 70 to 155°C.

Voltage rating:


Resistors shall have a rated direct-current (DC) continuous working voltage or an approximate sine-wave root-mean-square (RMS) alternating-current (AC) continuous working voltage at commercial-line frequency and waveform corresponding to the power rating, as determined from the following formula:


$$RCWV = \sqrt{P \times R}$$


Remark: RCWV: Rating Continuous Working Voltage (Volt.) P: power rating (Watt) R: nominal resistance (Ω)

In no case, the rated DC or RMS AC continuous working voltage must be greater than the applicable maximum value.

The overload voltage is 2.5 times RCWV or Max. Overload voltage whichever is lower.



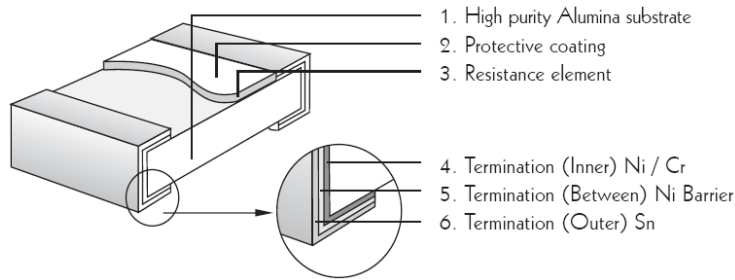
9 Structure10 Performance Specification

| Characteristic                  | Limits  | Test Methods<br>(GB/T5729&JIS-C-5201&IEC60115-1)   |
|---------------------------------|---|--|
| Temperature Coefficient         | $\pm 100\text{PPM}/^{\circ}\text{C}$  | 4.8 Natural resistance changes per temp. Degree centigrade<br>$\frac{R_2 - R_1}{R_1(t_2 - t_1)} \times 10^6 \text{ (PPM}/^{\circ}\text{C)}$ R <sub>1</sub> : Resistance Value at room temperature t <sub>1</sub><br>R <sub>2</sub> : Resistance at test temperature<br>(Upper limit temperature or Lower limit temperature)<br>t <sub>1</sub> : Room temperature +25°C or specified<br>t <sub>2</sub> : Upper limit or Lower limit temperature |
| Short-time overload             | $\pm(2.0\%+0.1\Omega)$  | 4.13 Permanent resistance change after the application of 2.5 times RCWV for 5 seconds.  |
| Terminal bending                | $\pm(1.0\%+0.05\Omega)$   | 4.33 Twist of test board:<br>Y/X = 3/90 mm for 60 Seconds  |
| Dielectric withstanding voltage | No evidence of flashover mechanical damage, arcing or insulation breaks down. | 4.7 Resistors shall be clamped in the trough of a 90°C metallic v-block and shall be tested at ac potential respectively specified in the given list of each product type for 60-70 seconds.   |
| Soldering heat                  | $\pm(1.0\%+0.05\Omega)$   | 4.18 Dip the resistor into a solder bath having a temperature of 260°C±5°C and hold it for 10±1 seconds.   |
| Insulation resistance           | $\cong 1000\text{M}\Omega$  | 4.6 The measuring voltage shall be measured with a direct voltage of (100±15)V or a voltage equal to the dielectric withstanding voltage., and apply for 1min.   |
| Solderability                   | Coverage must be over 95%.  | Wave solder: Test temperature of solder: 245°C±3°C dipping time in solder: 2-3 seconds.<br>Reflow:   |
| Rapid change of temperature     | $\pm 5\% : \pm(1.0\%+0.05\Omega)$<br>$\pm 1\% : \pm(0.5\%+0.05\Omega)$        | 4.19 30 min at lower limit temperature and 30 min at upper limit temperature 100 cycles.   |
| Humidity ( steady state )       | $\pm(3.0\%+0.1\Omega)$  | 4.24 Temporary resistance change after 240 hours exposure in a humidity test chamber controlled at 40±2°C and 90-95% relative humidity   |
| Load life in humidity           | $\pm(3.0\%+0.1\Omega)$  | 7.9 Resistance change after 1,000 hours (1.5 hours "ON", 0.5 hour "OFF") at RCWV in a humidity chamber controlled at 40 °C±2°C and 90 to 95% relative humidity.  |
| Load life                       | $\pm(3.0\%+0.1\Omega)$  | 4.25.1 Permanent resistance change after 1,000 hours operating at RCWV with duty cycle 1.5 hours "ON", 0.5 hour "OFF" at 70 °C±2°C ambient.  |
| Low Temperature Storage         | $\pm(3.0\%+0.1\Omega)$  | 4.23.4 Lower limit temperature , for 2H.   |
| High Temperature Exposure       | $\pm(3.0\%+0.1\Omega)$  | 4.23.2 Upper limit temperature , for 16H.  |
| Leaching                        | No visible damage   | J-STD-002 Test D<br>Samples completely immersed for 30 sec in solder bath at 260°C   |

## 11. Packing


### 11.1 Dimension of Paper Taping: (Unit: mm)

| Type | A ±0.2 | B ±0.2 | C ±0.05 | $\Phi D \begin{smallmatrix} +0.1 \\ -0 \end{smallmatrix}$ | E ±0.1 | F ±0.05 | G ±0.1 | W ±0.2 | T ±0.1 |
|------|--------|--------|---------|---|--------|---------|--------|--------|--------|
| HV03 | 1.10   | 1.90   | 2.00    | 1.50  | 1.75   | 3.50    | 4.00   | 8.00   | 0.67   |
| HV05 | 1.65   | 2.40   | 2.00    | 1.50  | 1.75   | 3.50    | 4.00   | 8.00   | 0.81   |
| HV06 | 2.00   | 3.60   | 2.00    | 1.50  | 1.75   | 3.50    | 4.00   | 8.00   | 0.81   |
| HV07 | 2.80   | 3.50   | 2.00    | 1.50  | 1.75   | 3.50    | 4.00   | 8.00   | 0.75   |




### 11.2 Dimension of plastic taping (Unit: mm)

| Type | A ±0.2 | B ±0.2 | C ±0.05 | $\Phi D \begin{smallmatrix} +0.1 \\ -0 \end{smallmatrix}$ | $\Phi D1 \begin{smallmatrix} +0.25 \\ -0 \end{smallmatrix}$ | E ±0.1 | F ±0.05 | G ±0.1 | W ±0.2 | T ±0.1 |
|------|--------|--------|---------|---|---|--------|---------|--------|--------|--------|
| HV10 | 2.90   | 5.60   | 2.00    | 1.50  | 1.50  | 1.75   | 5.50    | 4.00   | 12.00  | 1.00   |
| HV12 | 3.50   | 6.70   | 2.00    | 1.50  | 1.50  | 1.75   | 5.50    | 4.00   | 12.00  | 1.00   |



### 11.3 Dimension of Reel : (Unit: mm)

| Type | Taping   | Qty/Reel | A ±0.5 | B ±0.5 | C ±0.5 | D ±1 | M ±2  | W ±1 |
|------|----------|----------|--------|--------|--------|------|-------|------|
| HV03 | Paper    | 5,000pcs | 2.0    | 13.0   | 21.0   | 60.0 | 178.0 | 10.0 |
| HV05 | Paper    | 5,000pcs | 2.0    | 13.0   | 21.0   | 60.0 | 178.0 | 10.0 |
| HV06 | Paper    | 5,000pcs | 2.0    | 13.0   | 21.0   | 60.0 | 178.0 | 10.0 |
| HV07 | Paper    | 5,000pcs | 2.0    | 13.0   | 21.0   | 60.0 | 178.0 | 10.0 |
| HV10 | Embossed | 4,000pcs | 2.0    | 13.0   | 21.0   | 60.0 | 178.0 | 13.8 |
| HV12 | Embossed | 4,000pcs | 2.0    | 13.0   | 21.0   | 60.0 | 178.0 | 13.8 |

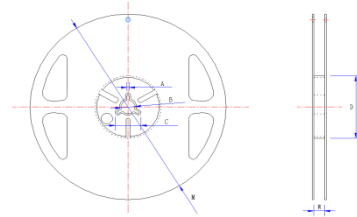

## 12 Note

- 12.2 UNI-ROYAL recommend products store in warehouse with temperature between 15 to 35°C under humidity between 25 to 75%RH. Even under storage conditions recommended above, solder ability of products will be degraded stored over 1 year old.
- 12.3 Cartons must be placed in correct direction which indicated on carton, otherwise the reel or wire will be deformed.
- 12.4 Storage conditions as below are inappropriate:
- Stored in high electrostatic environment
  - Stored in direct sunshine, rain, snow or condensation.
  - Exposed to sea wind or corrosive gases, such as Cl<sub>2</sub>, H<sub>2</sub>S, NH<sub>3</sub>, SO<sub>2</sub>, NO<sub>2</sub>, etc.

## 13 Record

| Version | Description           | Page | Date         | Amended by  | Checked by |
|---------|-----------------------|------|--------------|-------------|------------|
| 1       | First version         | 1~6  | Mar.20, 2018 | Haiyan Chen | Nana Chen  |
| 2       | Modify characteristic | 4~5  | Feb.12, 2019 | Haiyan Chen | Yuhua Xu   |

© Uniroyal Electronics Global Co., Ltd. All rights reserved. Specification herein will be changed at any time without prior notice.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Thick Film Resistors](#) category:*

*Click to view products by [Uniroyal](#) manufacturer:*

Other Similar products are found below :

[MCR03EZPFX3162](#) [MCR004YZPJ332](#) [201007J022KT4E](#) [201007F1653T4E](#) [201007F6652T4E](#) [0603WAF137KT5E](#) [RTT204702FTE](#)  
[RTT203000FTE](#) [RTT2056R0FTE](#) [CR2010F470KE04Z](#) [RTT018451FTH](#) [RTT021802DTH](#) [0402WGF510LTCE](#) [0201WMJ0200TEE](#)  
[TR0603B26K7P0550Z](#) [0201WMF5102TEE](#) [1210W2J047KT5E](#) [YLR12-2-4F-W](#) [HOT\(0.25x1.3\)-3.2-0R-I](#) [HOT\(0.4x1.5\)-5.2-0R-I](#)  
[HoT\(0.45x1.5\)-8.2-0R-I](#) [0201WMF1103TEE](#) [0201WMF7152TEE](#) [1210W2J0124T5E](#) [201007J010LT4E](#) [201007J0360T4E](#) [201007J0430T4E](#)  
[0805W8F931KT5E](#) [1206W4F5231T5E](#) [1210W2J0620T5E](#) [201007J0822T4E](#) [0201WMF1005TCE](#) [0201WMF1212TCE](#) [0201WMF1373TCE](#)  
[0201WMF1400TCE](#) [0201WMF2000TEE](#) [0201WMF2001TCE](#) [0201WMF226JTCE](#) [0201WMF2672TCE](#) [0201WMF2803TCE](#)  
[0201WMF357JTCE](#) [0201WMF3743TCE](#) [0201WMF430JTCE](#) [0201WMF4990TCE](#) [0201WMF5104TCE](#) [0201WMF510JTEE](#)  
[0201WMF5110TCE](#) [0201WMF6652TEE](#) [0201WMF6812TCE](#) [0201WMF8200TCE](#)