

UNI-ROYAL
厚聲集團

DATA SHEET

Product Name Metal Foil Chip Resistors

Part Name MS01 MS02 MS03 MS05 MS06 Series

Uniroyal Electronics Global Co., Ltd.

88#, Longteng Road, Economic & Technical Development Zone, Kunshan, Jiangsu, China

Tel +86 512 5763 1411 / 22 /33

Email marketing@uni-royal.cn

Manufacture Plant Uniroyal Electronics Industry Co., Ltd.

Aeon Technology Corporation

Royal Electronic Factory (Thailand) Co., Ltd.

Royal Technology (Thailand) Co., Ltd.

1. Scope

- 1.1 This specification for approve relates to the Metal Foil Chip Resistors manufactured by UNI-ROYAL.
- 1.2 Low Resistance / TCR / EMF(Only for MnCu)/ Inductance
- 1.3 Excellent long term stability
- 1.4 RoHs compliant and halogen free.
- 1.5 down size to 0201.
- 1.6 High precision current sensing and voltage division
- 1.7 High current jumper

2. Part No. System

Part No. includes 14 codes shown as below:

2.1 1st~4th codes: Part name. E.g.: MS01,MS02,MS03,MS05,MS06

2.2 5th~6th codes: Power rating.

E.g.: W=Normal Size "1~G" = "1~16"

Wattage	1/5	1/4	1/3	1/2	3/4	1
Normal Size	W5	W4	W3	W2	07	1W

If power rating is lower or equal than 1 watt, 5th code would be "W" and 6th code would be a number or letter.

E.g.: WA=1/10W W4=1/4W

2.3 7th code: Tolerance. E.g.: D=±0.5% F=±1% G=±2% J=±5% K= ±10%

2.4 8th~11th codes: Resistance Value.

2.4.1 If value belongs to standard value of ≥5% series, 8th code would be zero, 9th~10th codes are significant figures of the resistance and 11th code is the power of ten.

2.4.2 If value belongs to standard value of ≤2% series, 8th~10th codes are significant figures of the resistance, and 11th code is the power of ten.

2.4.3 11th codes listed as following:

0=10⁰ 1=10¹ 2=10² 3=10³ 4=10⁴ 5=10⁵ 6=10⁶ J=10⁻¹ K=10⁻² L=10⁻³ M=10⁻⁴ N=10⁻⁵ P=10⁻⁶

2.5 12th~14th codes.

2.5.1 12th code: Packaging Type. E.g.: C=Bulk T=Tape/Reel

2.5.2 13th code: Standard Packing Quantity.

4=4000pcs 5=5000pcs C=10000pcs D=20000pcs E=15000pcs


Chip Product: BD=B/B-20000pcs TC=T/R-10000pcs

2.5.3 14th code: Special features.

E = Environmental Protection, Lead Free, or Standard type.

3. Ordering Procedure

(Example: MS02 1/3W ±1% 3mΩ T/R-10000)

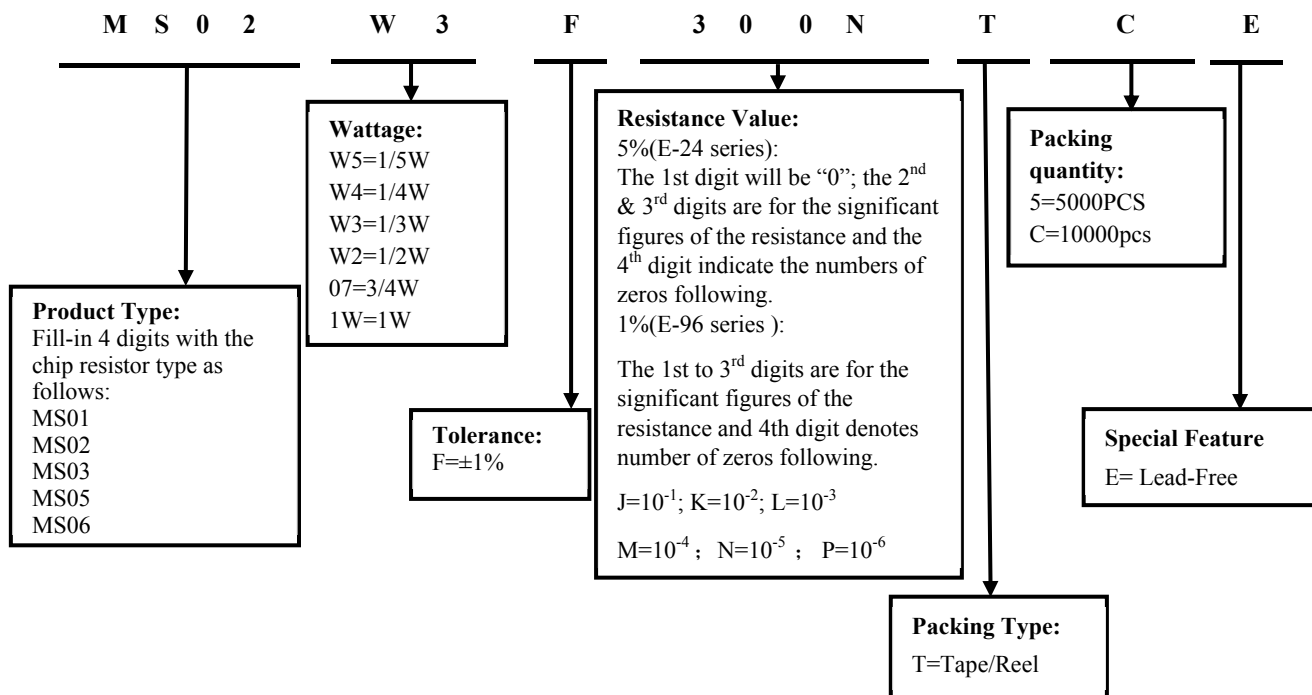

4. Marking

4.1 MS01&MS02 type no marking

4.2 MS03 type products marking are 2 or 3 digits

e.g. 2 digits

10mΩ the product marking is 10.

e.g. 3 digits

“M” designates the decimal location in milli-ohms

2.5mΩ the product marking is 2M5

4.3 MS05,MS06 type products marking are 4 digits.


“R” designates the decimal location in ohms

e.g. 10mΩ the product marking is R010


5. Electrical Specifications

Type	Rating Power at 70°C	temperature coefficient (ppm/°C)	Max. Rating Current (A)	Max. Overload Current (A)	Resistance Range (mΩ)	Operating Temperature Range (°C)
					1.0% (F)	
MS01 (0201)	1/5W	±200	4.47	7.07	10 mΩ, 20mΩ	-55°C~+125°C
MS02 (0402)	1/3W	±150	11.48	18.16	2.5 mΩ, 3mΩ	
		±100	8.12	12.84	5 mΩ~25mΩ	
	1/4W	±100	3.10	4.90	26 mΩ~50mΩ	
MS03 (0603)	1/2W	±75	10	15.81	5 mΩ~9mΩ	
		±50	7.07	11.18	10mΩ~30mΩ	
MS05 (0805)	1/2W	±100	10	22.36	5mΩ~9mΩ	
		±50	6.45	14.43	12mΩ~13mΩ	
		±50	7.07	15.81	10mΩ、15mΩ~25mΩ	
	3/4W	±50	8.66	19.36	10mΩ	
MS06 (1206)	1W	±100	11.95	26.72	7mΩ	
		±100	14.14	31.62	5mΩ~6mΩ, 8mΩ~9mΩ	
		±50	10	22.36	10mΩ~25mΩ	

6. Dimension (Unit: mm)

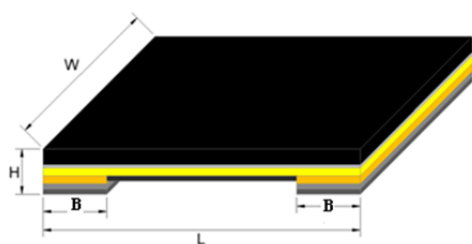

MS01,MS02




MS03,MS05,MS06

Type	Power Rating	Resistance Range	L(mm)	W(mm)	H(mm)	A(mm)	B(mm)
MS01 (0201)	1/5W	10mΩ,20mΩ	0.60±0.15	0.30±0.15	0.25±0.10	/	0.15±0.10
MS02 (0402)	1/3W	2.5mΩ,3mΩ	1.00±0.15	0.55±0.15	0.30±0.10		0.30±0.10
		5mΩ~25mΩ					0.23±0.10
	1/4W	26mΩ~50mΩ					
MS03 (0603)	1/2W	5mΩ	1.60±0.25	0.80±0.25	0.65±0.20	/	0.50±0.20
		6mΩ~30mΩ					0.40±0.20
MS05 (0805)	1/2W	5mΩ~9mΩ	2.00±0.30	1.20±0.30	0.60±0.20	≤1.0	0.65±0.15
		12mΩ~13mΩ					0.57±0.15
		10mΩ、15mΩ~25mΩ					0.42±0.15
	3/4W	10mΩ					0.42±0.15
MS06 (1206)	1W	7mΩ	3.10±0.20	1.60±0.30	0.70±0.20	≤1.0	0.86±0.25
		5mΩ~6mΩ,8mΩ~9mΩ					0.76±0.25
		10mΩ~25mΩ					0.46±0.25


*Please contact factory for other sizes

7. Structure


7.1MS01,MS02

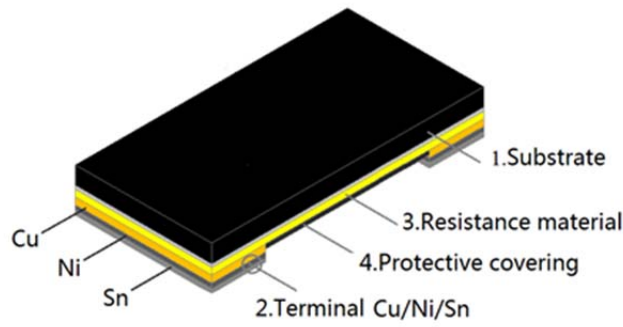

7.2MS03,MS05,MS06

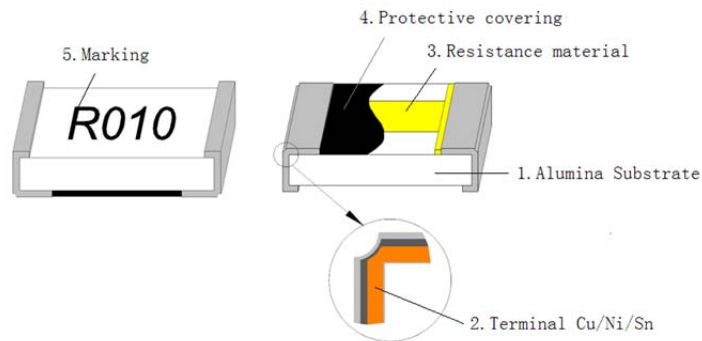

8. Recommend land pattern

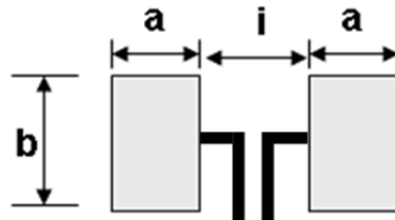


Type	Power	Resistance Range	a (mm)	b (mm)	i (mm)
MS01 (0201)	1/5W	10mΩ, 20mΩ	0.20±0.05	0.33±0.05	0.25±0.05
MS02 (0402)	1/3W	2.5mΩ, 3mΩ	0.60±0.05	0.60±0.05	0.35±0.05
		5mΩ~25mΩ	0.60±0.05	0.60±0.05	0.40±0.05
MS03 (0603)	1/2W	5mΩ	1.35±0.05	0.92±0.05	0.50±0.05
		6m~30mΩ	1.30±0.05	0.92±0.05	0.60±0.05
MS05	1/2W	5mΩ~25mΩ	1.20±0.05	1.20±0.05	1.2±0.05
	3/4W	10mΩ	1.20±0.05	1.20±0.05	1.2±0.05
MS06	1W	5mΩ~25mΩ	1.90±0.10	1.80±0.10	1.40±0.10

9. Derating Curve

The Operating Temperature Range: -55°C ~+155°C(MS02~MS06) , -55°C ~+125°C(MS01)

For resistors operated in ambient temperatures above 70°C, power rating must be derated in accordance with the curve below

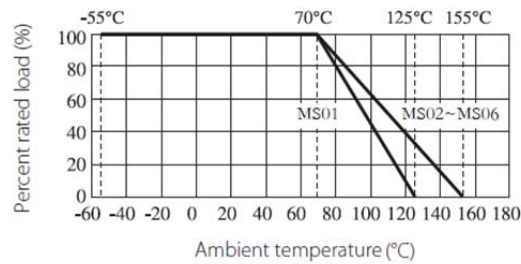

9.1 Rating Current:

The following equation may be used to determine the DC (Direct Current) or AC (Alternating Current) (RMS, root mean square value) of normal rated power. However, if the result value exceeds the highest current of regulated standards, the highest normal rated power is to be used

$$I = \sqrt{P/R}$$

I = Rating current (A)

P= Rating Power (W)

R= Resistance(Ω)

10. Performance Specification


Characteristic	Limits	Test Methods (GB/T5729&JIS-C-5201&IEC60115-1)
Temperature Coefficient	Refer to item 5.0	4.8 Natural resistance changes per temp. Degree centigrade $\frac{R_2 - R_1}{R_1(t_2 - t_1)} \times 10^6 \text{ (PPM/°C)}$ R ₁ : Resistance Value at room temperature (t ₁) ; R ₂ : Resistance at test temperature (Upper limit temperature or Lower limit temperature) t ₁ : +25°C or specified room temperature t ₂ : Upper limit temperature or Lower limit temperature test temperature
Short-time overload	±(1.0%+0.001 Ω)	4.13 The number of rated power are as follows : MS01,MS02,MS03: 2.5 times of rated power MS05、MS06: 5 times of rated power For 5 Seconds
Low Temperature Storage	±(1.0%+0.001Ω)	IEC 60068-2-1 (Aa) Lower limit temperature , for 1000H
High Temperature Exposure	±(1.0%+0.001Ω)	MIL-STD-202 108A Upper limit temperature , for 1000H

Solderability	More than 95% coverage rate	4.17 The surface of solder must be new, smooth, clean, shiny and continuous, and without concentrated pinholes. The solder's temperature must be within $245\pm 3^{\circ}\text{C}$. Hold in hot solder 2~3seconds.
soldering heat	$\pm (1.0\%+0.005 \Omega)$	4.18 Dipped into solder at 260°C for 10 seconds.
Load life	$\pm (2.0\%+0.001 \Omega)$	4.25.1 Permanent resistance change after 1,000 hours operating at rated power at $70\pm 2^{\circ}\text{C}$, 1.5hrs ON ,0.5hrs OFF.
Load life in humidity	$\pm (2.0\%+0.001 \Omega)$	7.9 $40\pm 2^{\circ}\text{C}$, 1000hrs at rated power, 90~95%RH , 1.5hrs ON, 0.5hrs OFF

11. Soldering Condition

(This is for recommendation, please customer perform adjustment according to actual application)

11.1 Recommend Reflow Soldering Profile : (solder : Sn96.5 / Ag3 / Cu0.5)

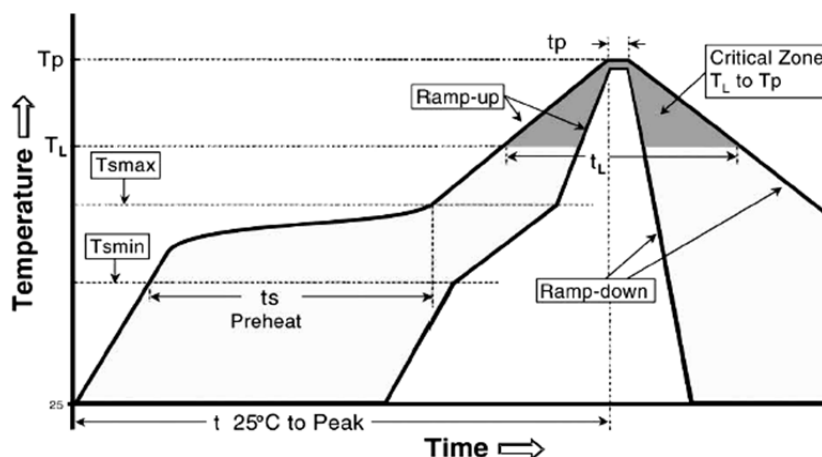


Profile Feature	Lead (Pb)-Free solder
Preheat: Temperature Min ($T_{s_{min}}$) Temperature Max ($T_{s_{max}}$) Time ($T_{s_{min}}$ to $T_{s_{max}}$) (ts)	150°C 200°C 60 -120seconds
Average ramp-up rate: ($T_{s_{max}}$ to T_p)	3°C / second max.
Time maintained above : Temperature (T_L) Time (t_L)	217°C 60-150 seconds
Peak Temperature (T_p)	260°C
Time within $+0$ -5°C of actual peak Temperature (t_p) ²	10 seconds
Ramp-down Rate	6°C/second max.
Time 25°C to Peak Temperature	8minutes max.

Allowed Re-flow times : 2 times


Remark : To avoid discoloration phenomena of chip on terminal electrodes, please use N2 Re-flow furnace .

11.2 Recommend Wave Soldering Profile : (Apply to 0603 and above size)

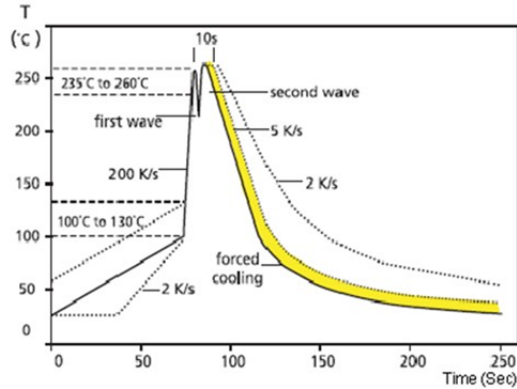

12. Packing of Surface Mount Resistors


12.1 Carrier Dimensions:(Unit: mm)

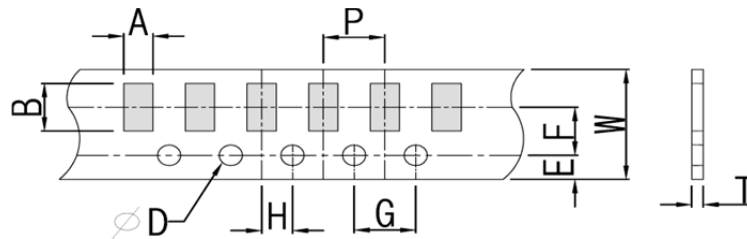

Unit: mm

Type	Power	W	P	E	F	φD	G	H	A	B	T
MS01 (0201)	1/5W	8.0±0.30	2.0±0.10	1.75±0.10	3.5±0.10	1.50+0.1/-0	4.0±0.10	2.0±0.10	0.40±0.20	0.70±0.20	0.45±0.05
MS02 (0402)	1/3W 1/4W								0.65±0.20	1.10±0.20	0.42±0.05
MS03 (0603)	1/2W	8.0±0.30	4.0±0.10	1.75±0.10	3.5±0.10	1.50+0.1/-0	4.0±0.10	2.0±0.10	1.18±0.20	1.98±0.20	0.75±0.20
MS05 (0805)	1/2W 3/4W								1.65±0.20	2.40±0.20	0.81±0.10
MS06 (1206)	1W								2.00±0.20	3.60±0.20	

12.2 Dimension of Reel : (Unit: mm)

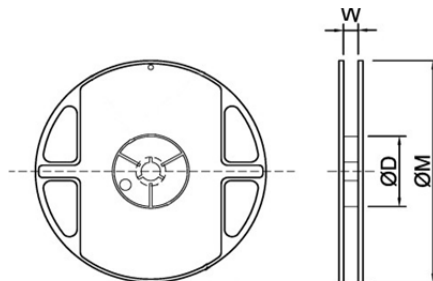

Type	PCS /Reel	φD	W	φM
MS01(0201)	10,000	60±2	9.0±2	178±5
MS02(0402)	10,000			
MS03(0603)	5,000			
MS05(0805)	5,000			
MS06(1206)	5,000			

13. Note

13.1 UNI-ROYAL recommend the storage condition temperature: $25 \pm 5^{\circ}\text{C}$, humidity : $60 \pm 20\%$.

(Put condition for individual product).

Even under UNI-ROYAL recommended storage condition, solderability of products over 1 year old. (Put condition for each product) may be degraded.

13.2 Store / transport cartons in the correct direction, which is indicated on a carton as a symbol.

Otherwise bent leads may occur due to excessive stress applied when dropping of a carton.

13.3 Product performance and soldered connections may deteriorate if the products are stored in the following places:

- a. Storage in high Electrostatic.
- b. Storage in direct sunshine、rain and snow or condensation.
- c. Where the products are exposed to sea winds or corrosive gases, including Cl_2 , H_2S , NH_3 , SO_2 , NO_2 .

14. Record

Version	Description	Page	Date	Amended by	Checked by
1	First version	1~7	Mar.20, 2018	Haiyan Chen	Nana Chen
2	1. Add MS03 specifications 2. Modify dimension resistance detail	1~7 3~4	July.12, 2018	Haiyan Chen	Nana Chen
3	1. Delete unrecommended specifications and blocks 2. Add 1.6 items and modify 2.51, 2.52, 2.53, 3 3. Add 5.0 item white code diagram 4. Add 10.3 items of 1000-grain weight data 5. Delete the 9.0 performance item Rapid change of temperature、Biased Humidity、Leaching	1~7 2 3 3 6 5	Dec.4, 2018	Dongmei Liao	Shuai Wu
4	Change the resistance range	3	Jan.24,2019	Shuai Wu	Qingfeng Song
5	Modify the product name	1~7	Feb.16, 2019	Haiyan Chen	Yuhua Xu
6	Change the resistance range and temperature coefficient	3	Apr.24, 2019	Haiyan Chen	Yuhua Xu
7	Add the MS12 2W power	3	Sep.11, 2019	Haiyan Chen	Yuhua Xu
8	Modify the reflow curve and add the wave soldering curve	5	Apr.29, 2020	Haiyan Chen	Yuhua Xu
9	Add the MS01,MS02,MS03	1~9	Jul.01, 2020	Haiyan Chen	Yuhua Xu
10	Modify the MS05 Power	3~5,8	Nov.11, 2020	Haiyan Chen	Yuhua Xu
11	1.Modify the MS05, MS06 temperature coefficient 2.Modify the MS05 resistance range	3 3~4	Aug.25, 2021	Haiyan Chen	John Zhao
12	1. Delete MS03 1/3W power 2.Add MS06 9mR resistance, cancel MS06 27mR resistance	3~4	Sep.06, 2021	Haiyan Chen	Yuhua Xu

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Current Sense Resistors - SMD category](#):

Click to view products by [Uniroyal manufacturer](#):

Other Similar products are found below :

[CRL0603-FW-R700ELF](#) [PFS35-200RF1](#) [NPS 2-T126 5.000 OHM 1%](#) [PFS35-0R01J1](#) [PFS35-0R05J1](#) [PFS35-5RF1](#) [CD2015FC-0.10-1%](#)
[PR2512FKF7W0R004L](#) [RC1005F124CS](#) [RL73K3AR56JTDF](#) [RL7520WT-R001-F](#) [RL7520WT-R009-G](#) [RL7520WT-R020-F](#) [LRC-](#)
[LR2512LF-01-R820J](#) [WR06X104JGLJ](#) [TL2BR01F](#) [65709-330](#) [SP1R12J](#) [RL7520WT-R039-G](#) [RL7520WT-R002-F](#) [LRF2010-R003JW](#)
[KRL1632E-C-R200-F-T5](#) [KRL1632E-C-R200-F-T1](#) [Y14880R02000B9R](#) [RLP73M1ER051FTDF](#) [RLP73M2AR075FTDF](#)
[SR731ERTTP5R10F](#) [SR731ERTTP100J](#) [SR731ERTTP6R80F](#) [SR731ERTTP4R70F](#) [SR731ERTTP2R20F](#) [SR731ERTTP3R90F](#)
[SR731ERTTP1R00F](#) [SR731ERTTP10R0F](#) [SR731ERTTP2R00F](#) [SR731ERTTP8R20F](#) [SR731ERTTP3R9J](#) [SR731ERTTP8R2J](#)
[SR731ERTTP2R0J](#) [SR731ERTTP4R7J](#) [SR731ERTTP9R1J](#) [SR731ERTTP1R0J](#) [SR731ERTTP2R2J](#) [SR731ERTTP5R1J](#) [SR731ERTTP6R8J](#)
[SR731ERTTP9R10F](#) [RCWE2512R180FKEA](#) [FCSL64R007JER](#) [LRF1206-R018FW](#) [TLR2B10DR022FTDG](#)