

UNI-ROYAL
厚聲集團

DATA SHEET

Product Name Wide Terminal Thick Film Chip Resistors

Part Name WR Series

Uniroyal Electronics Global Co., Ltd.

88 Longteng Road, Economic & Technical Development Zone, Kunshan, Jiangsu, China

Tel +86 512 5763 1411 / 22 /33

Email marketing@uni-royal.cn

Manufacture Plant Uniroyal Electronics Industry (kunshan) co., ltd.
Uniroyal Electronics Industry Co., Ltd.
Uniroyal Electronics Global Co.,Ltd Shenzhen Branch
Aeon Technology Corporation
Uniroyal Electronics Global Co.,Ltd Xiamen Branch
Kunshan Foss Electronic material Co., Ltd.
Royal Electronic Factory (thailand) co., ltd

Brands *RoyalOhm* *UniOhm*



1. Scope

- 1.1 This specification for approve relates to the Wide Terminal Thick Film Chip Resistors manufactured by UNI-ROYAL.
- 1.2 Suitable for both wave & re-flow soldering
- 1.3 Application: AV adapters, LCD back-light, camera strobe etc

2. Explanation of Part No. System

Part No. includes 14 codes shown as below:

2.1 1st~4th codes: Part name. E.g.: WR08, WR12, WR20, WR18, WR25

2.2 5th~6th codes: Power rating.

| E.g.: W=Normal Size | | “1~G” = “1~16” | | | | | | | | | |
|---------------------|------|----------------|-----|-----|-----|-----|------|------|------|----|--|
| Wattage | 1/32 | 3/4 | 1/2 | 1/3 | 1/4 | 1/8 | 1/10 | 1/16 | 1/20 | 1 | |
| Normal Size | WH | 07 | W2 | W3 | W4 | W8 | WA | WG | WM | 1W | |

If power rating is lower or equal than 1 watt, 5th code would be “W” and 6th code would be a number or letter.

E.g.: WA=1/10W W4=1/4W

2.3 7th code: Tolerance. E.g.: D=±0.5% F=±1% G=±2% J=±5% K= ±10%

2.4 8th~11th codes: Resistance Value.

2.4.1 If value belongs to standard value of ≥5% series, 8th code would be zero, 9th~10th codes are significant figures of the resistance and 11th code is the power of ten.

2.4.2 If value belongs to standard value of ≤2% series, 8th~10th codes are significant figures of the resistance, and 11th code is the power of ten.

2.4.3 11th codes listed as following:

0=10⁰ 1=10¹ 2=10² 3=10³ 4=10⁴ 5=10⁵ 6=10⁶ J=10⁻¹ K=10⁻² L=10⁻³ M=10⁻⁴ N=10⁻⁵ P=10⁻⁶

2.5 12th~14th codes.

2.5.1 12th code: Packaging Type. E.g.: C=Bulk T=Tape/Reel

2.5.2 13th code: Standard Packing Quantity.

4=4000pcs 5=5000pcs C=10000pcs D=20000pcs E=15000pcs


Chip Product: BD=B/B-20000pcs TC=T/R-10000pcs

2.5.3 14th code: Special features.

E = Environmental Protection, Lead Free, or Standard type.

3. Ordering Procedure


(Example: WR18 1W ±5% 10KΩ T/R-4000)

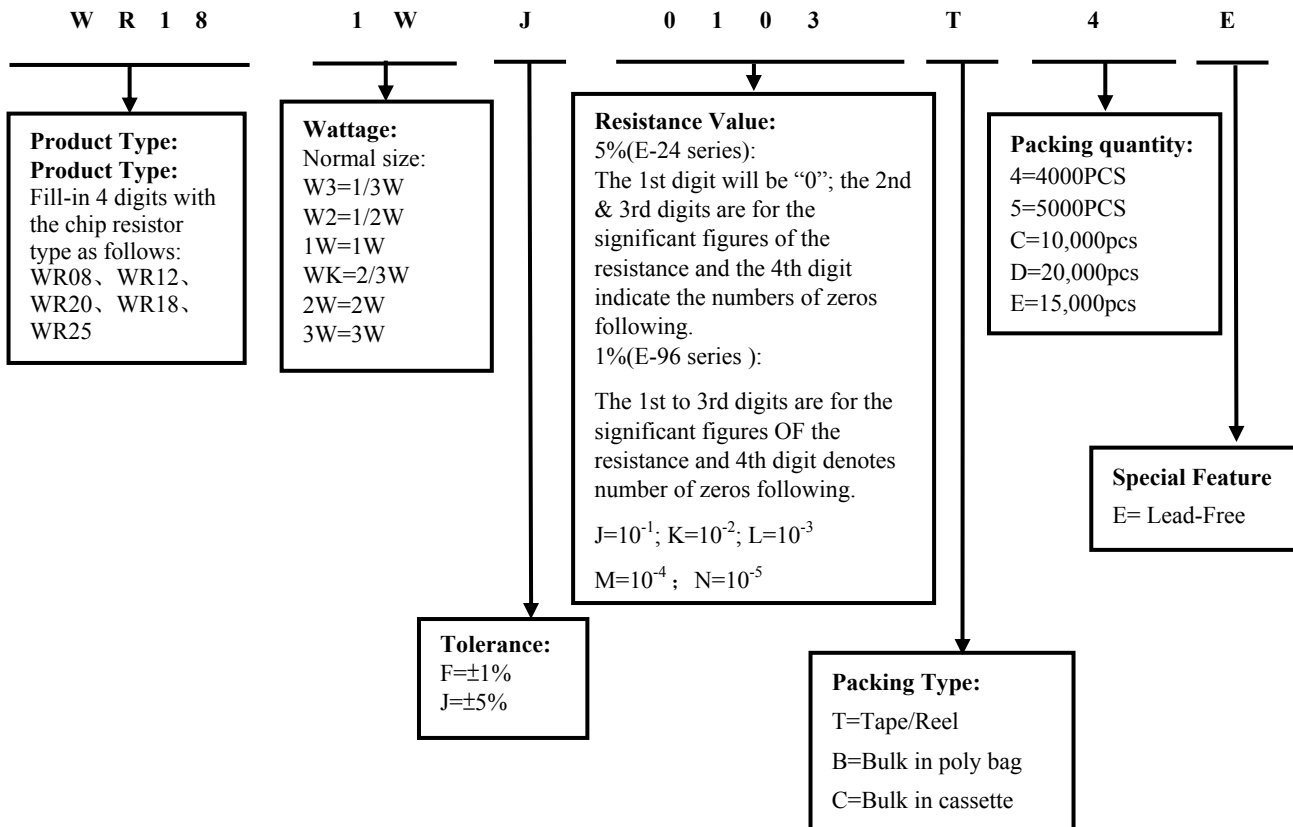

4. Marking

(1) $\pm 5\%$ Tolerance: The first two digits are significant figures of resistance and the third denotes number of zeros following


Example:



333 \rightarrow 33K Ω

(2) $\pm 5\%$ Tolerance: Below 10 Ω show as following, read alphabet "R" as decimal point.


Example:



2R2 \rightarrow 2.2 Ω

(3) $\pm 1\%$ Tolerance: 4 digits, first three digits are significant; the fourth digit is number of zeros. Letter r is decimal point.


Example:



2701 \rightarrow 2.7K Ω


(4) $\pm 5\%$, $\pm 1\%$ Tolerance, Product below 1 Ω , show as following, the first digit is "R" which as decimal point.

Example:



R500 \rightarrow 0.5 Ω

5. Dimension

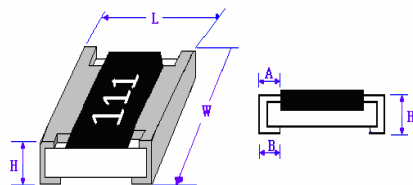

| Type | Dimension(mm) | | | | |
|------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| | L | W | H | A | B |
| WR08(0508) | 1.20 \pm 0.10 | 2.0 \pm 0.10 | 0.55 \pm 0.10 | 0.20 \pm 0.10 | 0.30 \pm 0.20 |
| WR12(0612) | 1.60 \pm 0.15 | 3.20 \pm 0.15 | 0.55 \pm 0.10 | 0.30 \pm 0.20 | 0.45 \pm 0.20 |
| WR20(1020) | 2.50 \pm 0.15 | 5.00 \pm 0.15 | 0.55 \pm 0.10 | 0.40 \pm 0.20 | 0.60 \pm 0.20 |
| WR18(1218) | 3.10 \pm 0.10 | 4.60 \pm 0.15 | 0.55 \pm 0.10 | 0.45 \pm 0.20 | 0.40 \pm 0.20 |
| WR25(1225) | 3.10 \pm 0.15 | 6.25 \pm 0.15 | 0.55 \pm 0.10 | 0.45 \pm 0.20 | 0.65 \pm 0.20 |


6. Resistance Range

| Type | Power Rating at 70 $^{\circ}$ C | Resistance Range | |
|------|---------------------------------|--|-------------------------|
| | | $\pm 1\%$ | $\pm 5\%$ |
| WR08 | 1/3W | 10 Ω ~1M | |
| | 2/3W | 10m Ω \leq R<10 Ω | |
| WR12 | 1/2W | 10 Ω ~1M | 1 Ω <R \leq 1M |
| | 1W | 10m Ω \leq R \leq 10 Ω | |
| WR20 | 1W | 10 Ω ~1M | 1 Ω ~1M |
| | | 10m Ω ~1 Ω | |
| WR18 | 1W | 10m Ω ~1M Ω | |
| WR25 | 2W | 1 Ω <R \leq 1M | |
| | 3W | 10m Ω \leq R \leq 1 Ω | |

7. Ratings

| Type | Max Working Voltage | Max Overload Voltage | Dielectric Withstanding Voltage | Resistance Value of Jumper | Rated Current of Jumper | Max. Overload Current of Jumper | Operating Temperature |
|------|---------------------|----------------------|---------------------------------|----------------------------|-------------------------|---------------------------------|-----------------------|
| WR08 | 150V | 300V | 500V | < 50mΩ | 4A | 8A | -55°C~155°C |
| WR12 | 200V | 400V | 500V | < 50mΩ | 5A | 10A | -55°C~155°C |
| WR20 | 200V | 400V | 500V | < 50mΩ | 6A | 12A | -55°C~155°C |
| WR18 | 200V | 400V | 500V | < 50mΩ | 6A | 10A | -55°C~155°C |
| WR25 | 200V | 400V | 500V | < 50mΩ | 6A | 15A | -55°C~155°C |

8. Recommend the size of welding plate

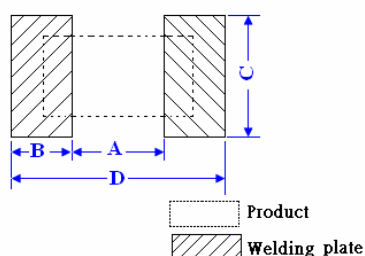


| Type | Dimension(mm) | | | |
|------|---------------|---------|---------|---------|
| | A | B | C | D |
| WR08 | 0.5±0.1 | 1.0±0.1 | 2.0±0.1 | 2.7±0.1 |
| WR12 | 0.6±0.1 | 1.0±0.1 | 3.2±0.1 | 2.9±0.1 |
| WR20 | 1.1±0.1 | 1.2±0.1 | 5.0±0.1 | 3.5±0.1 |
| WR18 | 2.2±0.1 | 1.2±0.1 | 4.6±0.1 | 4.6±0.1 |
| WR25 | 1.4±0.1 | 1.3±0.1 | 6.4±0.1 | 4.0±0.1 |

9. Derating Curve

Resistors shall have a power rating based on continuous load operation at an ambient temperature from -55°C to 70°C. For temperature in excess of 70°C, the load shall be derated as shown in figure 1

Figure 1

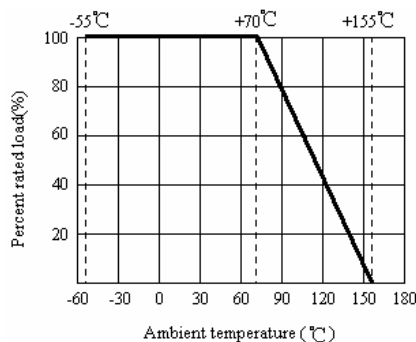

Voltage rating:

Resistors shall have a rated direct-current (DC) continuous working

voltage or an approximate sine-wave root-mean-square (RMS) alternating-current (AC) continuous working voltage at commercial-line frequency and waveform corresponding to the power rating, as determined from the following formula:

$$RCWV = \sqrt{P \times R}$$


Where: RCWV commercial-line frequency and waveform (Volt.)

P = power rating (WATT.) R = nominal resistance (OHM)

In no case shall the rated DC or RMS AC continuous working voltage be greater than the applicable maximum value.

The overload voltage is 2.5 times RCWV or Max. Overload voltage whichever is less


10. Structure

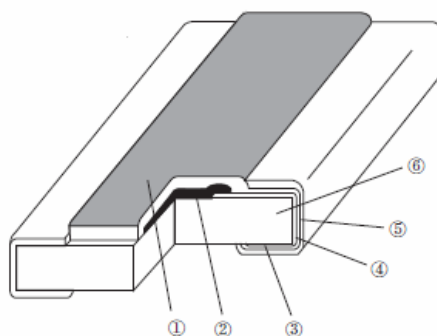

1. Protective layer
2. Resistive element
3. Termination (Inner) Ni / Cr
4. Termination (Between) Ni
5. Termination (Outer) Sn
6. High purity Alumina substrate


11. Performance Specification

| Characteristic | Limits | Test Methods (GB/T5729&JIS-C-5201&IEC60115-1) | | | | |
|-------------------------|---|--|----------------|-----|----------------|---|
| Temperature Coefficient | <p>WR08: $10\text{m}\Omega \leq R < 30\text{m}\Omega: 0 \sim +400 \text{ PPM}/^\circ\text{C}$ $30\text{m}\Omega \leq R < 10\Omega: 0 \sim +150 \text{ PPM}/^\circ\text{C}$ $10\Omega: \pm 400 \text{ PPM}/^\circ\text{C}$ $10\Omega < R \leq 100\Omega: \pm 200 \text{ PPM}/^\circ\text{C}$ $> 100\Omega: \pm 100 \text{ PPM}/^\circ\text{C}$</p> <p>WR12: $10\text{m}\Omega \leq R < 100\text{m}\Omega: 0 \sim +200 \text{ PPM}/^\circ\text{C}$ $100\text{m}\Omega \leq R \leq 10\Omega: 0 \sim +150 \text{ PPM}/^\circ\text{C}$ $1\Omega < R \leq 10\Omega: \pm 400 \text{ PPM}/^\circ\text{C}$ $10\Omega < R \leq 100\Omega: \pm 200 \text{ PPM}/^\circ\text{C}$ $> 100\Omega: \pm 100 \text{ PPM}/^\circ\text{C}$</p> <p>WR20: $10\text{m}\Omega \leq R < 30\text{m}\Omega: 0 \sim +200 \text{ PPM}/^\circ\text{C}$ $30\text{m}\Omega \leq R \leq 1\Omega: 0 \sim +100 \text{ PPM}/^\circ\text{C}$ $1\Omega < R \leq 10\Omega: \pm 400 \text{ PPM}/^\circ\text{C}$ $10\Omega < R \leq 100\Omega: \pm 200 \text{ PPM}/^\circ\text{C}$ $> 100\Omega: \pm 100 \text{ PPM}/^\circ\text{C}$</p> <p>WR18: $10\text{m}\Omega \leq R < 30\text{m}\Omega: 0 \sim +200 \text{ PPM}/^\circ\text{C}$ $30\text{m}\Omega \leq R \leq 1\Omega: 0 \sim +100 \text{ PPM}/^\circ\text{C}$ $1\Omega < R \leq 10\Omega: \pm 400 \text{ PPM}/^\circ\text{C}$ $10\Omega < R \leq 100\Omega: \pm 200 \text{ PPM}/^\circ\text{C}$ $> 100\Omega: \pm 100 \text{ PPM}/^\circ\text{C}$</p> <p>WR25: $10\text{m}\Omega \leq R < 30\text{m}\Omega: 0 \sim +150 \text{ PPM}/^\circ\text{C}$ $30\text{m}\Omega \leq R \leq 1\Omega: 0 \sim +100 \text{ PPM}/^\circ\text{C}$ $1\Omega < R \leq 10\Omega: \pm 400 \text{ PPM}/^\circ\text{C}$ $10\Omega < R \leq 100\Omega: \pm 200 \text{ PPM}/^\circ\text{C}$ $> 100\Omega: \pm 100 \text{ PPM}/^\circ\text{C}$</p> | <p>4.8 Natural resistance changes per temp. Degree centigrade</p> $\frac{R_2 - R_1}{R_1(t_2 - t_1)} \times 10^6 \text{ (PPM}/^\circ\text{C)}$ <p>R_1: Resistance Value at room temperature (t_1) ; R_2: Resistance at test temperature (Upper limit temperature or Lower limit temperature) t_1: +25°C or specified room temperature t_2: Upper limit temperature or Lower limit temperature test temperature</p> | | | | |
| Short-time overload | <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="text-align: center;">±1%</td> <td style="text-align: center;">±(1.0%+0.005Ω)</td> </tr> <tr> <td style="text-align: center;">±5%</td> <td style="text-align: center;">±(2.0%+0.005Ω)</td> </tr> </table> | ±1% | ±(1.0%+0.005Ω) | ±5% | ±(2.0%+0.005Ω) | 4.13 Permanent resistance change after the application of 2.5 times RCWV for 5 seconds. |
| ±1% | ±(1.0%+0.005Ω) | | | | | |
| ±5% | ±(2.0%+0.005Ω) | | | | | |
| Soldering heat | ±(1.0%+0.005Ω) | 4.18 Dip the resistor into a solder bath having a temperature of 260°C±5°C and hold it for 10±1 seconds. | | | | |

| | | | |
|---------------------------------|---|----------------|--|
| Dielectric withstanding voltage | No evidence of flashover mechanical damage, arcing or insulation breaks down. | | 4.7 Resistors shall be clamped in the trough of a 90°C metallic v-block and shall be tested at ac potential respectively specified in the given list of each product type for 60-70 seconds. |
| Solderability | Coverage must be over 95%. | | Wave solder: Test temperature of solder: 245°C±3°C dipping time in solder: 2-3 seconds. |
| | Go up tin rate bigger than half of end pole | | Reflow:  <p>The graph shows a reflow temperature profile. The y-axis is temperature in °C (50 to 250) and the x-axis is time. Key points include: 180°C (150s), 230°C (90±30s), and 245°C (20±10s). The peak value temperature is 245°C to 250°C. The profile is divided into 'HOT UP TIME', 'WARM-UP TIME', and 'SOLDER TIME'.</p> |
| Rapid change of temperature | ±1% | ±(0.5%+0.005Ω) | 4.19 30 min at lower limit temperature and 30 min at upper limit temperature , 100 cycles. |
| | ±5% | ±(1.0%+0.005Ω) | |
| Terminal bending | ±(1%+0.005Ω) | | 4.33 Twist of test board: Y/X = 3/90 mm for 60Seconds |
| Humidity (steady state) | ±1% | ±(1.0%+0.005Ω) | 4.24 Temporary resistance change after 240 hours exposure in a humidity test chamber controlled at 40±2°C and 90-95% relative humidity, |
| | ±5% | ±(3.0%+0.005Ω) | |
| Load life in humidity | ±1% | ±(1.0%+0.005Ω) | 7.9 Resistance change after 1,000 hours (1.5 hours “ON”, 0.5 hour “OFF”) at RCWV in a humidity chamber controlled at 40 °C±2°C and 90 to 95% relative humidity. |
| | ±5% | ±(3.0%+0.005Ω) | |
| Load life | ±1% | ±(1.0%+0.005Ω) | 4.25.1 Permanent resistance change after 1,000 hours operating at RCWV with duty cycle 1.5 hours “ON”, 0.5 hour “OFF” at 70 °C±2°C ambient. |
| | ±5% | ±(3.0%+0.005Ω) | |
| Low Temperature Storage | ±1% | ±(1.0%+0.005Ω) | 4.23.4 Lower limit temperature , for 2H. |
| | ±5% | ±(3.0%+0.005Ω) | |
| High Temperature Exposure | ±1% | ±(1.0%+0.005Ω) | 4.23.2 Upper limit temperature , for 16H. |
| | ±5% | ±(3.0%+0.005Ω) | |
| Leaching | No visible damage | | J-STD-002 Test D Samples completely immersed for 30 sec in solder bath at 260°C |


12. Packing of Surface Mount Resistors

12.1 Dimension of Paper Taping :(Unit: mm)

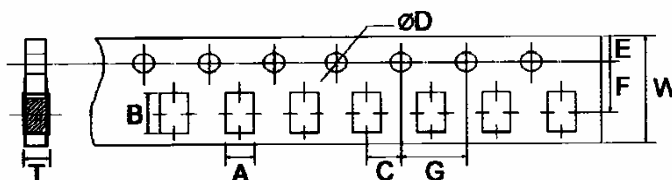


| TYPE | A ±0.2 | B ±0.2 | C ±0.05 | +0.1 ΦD -0 | E ±0.1 | F ±0.05 | G ±0.1 | W ±0.2 | T ±0.1 |
|------|--------|--------|---------|------------------|--------|---------|--------|--------|--------|
| WR08 | 1.65 | 2.40 | 2.0 | 1.5 | 1.75 | 3.5 | 4.0 | 8.0 | 0.81 |
| WR12 | 2.00 | 3.60 | 2.0 | 1.5 | 1.75 | 3.5 | 4.0 | 8.0 | 0.81 |

12.2 Dimension of Embossed Taping: (Unit: mm)

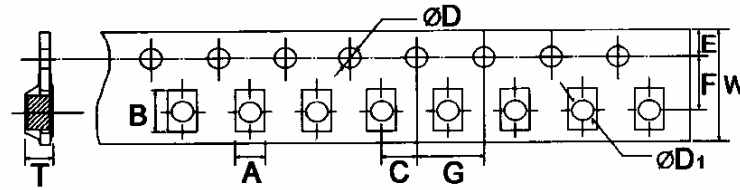

| TYPE | A ±0.2 | B ±0.2 | C ±0.05 | +0.1 φD -0 | +0.25 φD1 -0 | E ±0.1 | F ±0.05 | G ±0.1 | W ±0.2 | T ±0.1 |
|------|-----------|-----------|------------|------------------|--------------------|-----------|------------|-----------|-----------|-----------|
| WR20 | 2.9 | 5.6 | 2.0 | 1.5 | 1.5 | 1.75 | 5.5 | 4.0 | 12 | 1.0 |
| WR18 | 3.5 | 4.8 | 2.0 | 1.5 | 1.5 | 1.75 | 5.5 | 4.0 | 12 | 1.0 |
| WR25 | 3.5 | 6.7 | 2.0 | 1.5 | 1.5 | 1.75 | 5.5 | 4.0 | 12 | 1.0 |

12.3 Dimension of Reel : (Unit: mm)

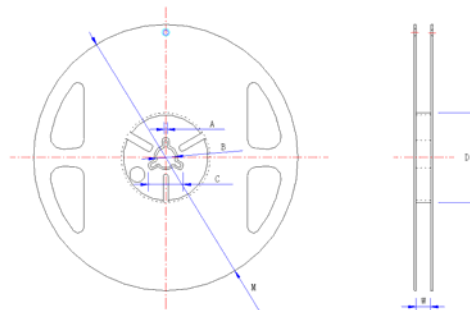

| Type | Taping | Qty/Reel | A±0.5 | B±0.5 | C±0.5 | D±1 | M±2 | W±1 |
|------|----------|-----------|-------|-------|-------|------|-----|------|
| WR08 | Paper | 5,000pcsl | 2.0 | 13.0 | 21.0 | 60.0 | 178 | 10 |
| WR12 | Paper | 5,000pcs | 2.0 | 13.0 | 21.0 | 60.0 | 178 | 10 |
| WR20 | Embossed | 4,000pcs | 2.0 | 13.0 | 21.0 | 60.0 | 178 | 13.8 |
| WR18 | Embossed | 4,000pcs | 2.0 | 13.0 | 21.0 | 60.0 | 178 | 13.8 |
| WR25 | Embossed | 4,000pcs | 2.0 | 13.0 | 21.0 | 60.0 | 178 | 13.8 |

13. Note

- 13.1. UNI-ROYAL recommend the storage condition temperature: 15°C~35°C, humidity :25%~75%.
(Put condition for individual product).Even under UNI-ROYAL recommended storage condition, solderability of products over 1 year old.
(Put condition for each product) may be degraded.
- 13.2. Store / transport cartons in the correct direction, which is indicated on a carton as a symbol.
Otherwise bent leads may occur due to excessive stress applied when dropping of a carton.
- 13.3. Product performance and soldered connections may deteriorate if the products are stored in the following places:
 - a. Storage in high Electrostatic.
 - b. Storage in direct sunshine、rain and snow or condensation.
 - c. Where the products are exposed to sea winds or corrosive gases, including Cl₂, H₂S₃ NH₃, SO₂, NO₂.

14. Record

| Version | Description of amendment | Page | Date | Amended by | Checked by |
|---------|---|----------|--------------|-------------|------------|
| 1 | First issue of this specification | 1~7 | Mar.20, 2018 | Chen Haiyan | Chen Nana |
| 2 | Modify performance criteria | 5~6 | May.02, 2018 | Chen Haiyan | Chen Nana |
| 3 | 1.Modify the resistance range of WR12 2.Modify the Performance Specification | 3 5~6 | Feb.13, 2019 | Chen Haiyan | Xu Yuhua |

Uniroyal Electronics Global Co., Ltd. , all rights reserved. Spec. herein would be changed at any time without prior notice.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Thick Film Resistors](#) category:

Click to view products by [Uniroyal](#) manufacturer:

Other Similar products are found below :

[MCR03EZPFX3162](#) [MCR004YZPJ332](#) [201007J022KT4E](#) [201007F1653T4E](#) [201007F6652T4E](#) [0603WAF137KT5E](#) [RTT204702FTE](#)
[RTT203000FTE](#) [RTT2056R0FTE](#) [CR2010F470KE04Z](#) [RTT018451FTH](#) [RTT021802DTH](#) [0402WGF510LTCE](#) [0201WMJ0200TEE](#)
[TR0603B26K7P0550Z](#) [0201WMF5102TEE](#) [1210W2J047KT5E](#) [YLR12-2-4F-W](#) [HOT\(0.25x1.3\)-3.2-0R-I](#) [HOT\(0.4x1.5\)-5.2-0R-I](#)
[HoT\(0.45x1.5\)-8.2-0R-I](#) [0201WMF1103TEE](#) [0201WMF7152TEE](#) [1210W2J0124T5E](#) [201007J010LT4E](#) [201007J0360T4E](#) [201007J0430T4E](#)
[0805W8F931KT5E](#) [1206W4F5231T5E](#) [1210W2J0620T5E](#) [201007J0822T4E](#) [0201WMF1005TCE](#) [0201WMF1212TCE](#) [0201WMF1373TCE](#)
[0201WMF1400TCE](#) [0201WMF2000TEE](#) [0201WMF2001TCE](#) [0201WMF226JTCE](#) [0201WMF2672TCE](#) [0201WMF2803TCE](#)
[0201WMF357JTCE](#) [0201WMF3743TCE](#) [0201WMF430JTCE](#) [0201WMF4990TCE](#) [0201WMF5104TCE](#) [0201WMF510JTEE](#)
[0201WMF5110TCE](#) [0201WMF6652TEE](#) [0201WMF6812TCE](#) [0201WMF8200TCE](#)