

# 10N65-TC

**Power MOSFET**

## 10A, 650V N-CHANNEL POWER MOSFET


### ■ DESCRIPTION

The **UTC 10N65-TC** is a high voltage and high current power MOSFET, designed to have better characteristics, such as fast switching time, low gate charge, low on-state resistance and a high rugged avalanche characteristics. This power MOSFET is usually used at high speed switching applications in power supplies, PWM motor controls, high efficient AC to DC converters and bridge circuits.

### ■ FEATURES

- \*  $R_{DS(ON)} \leq 0.9 \Omega$  @  $V_{GS}=10V$ ,  $I_D=5.0A$
- \* Fast switching
- \* Improved dv/dt capability

### ■ SYMBOL

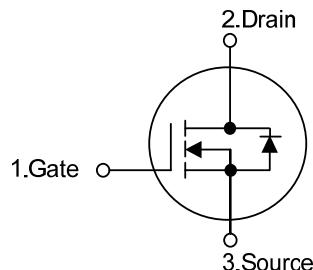


### ■ ORDERING INFORMATION

Ordering Number		Package	Pin Assignment			Packing
Lead Free	Halogen-Free		1	2	3	
10N65L-TA3-T	10N65G-TA3-T	TO-220	G	D	S	Tube
10N65L-TF1-T	10N65G-TF1-T	TO-220F1	G	D	S	Tube
10N65L-TF3-T	10N65G-TF3-T	TO-220F	G	D	S	Tube
10N65L-TF3T-T	10N65G-TF3T-T	TO-220F3	G	D	S	Tube
10N65L-T2Q-T	10N65G-T2Q-T	TO-262	G	D	S	Tube

Note: Pin Assignment: G: Gate D: Drain S: Source

10N65G-TA3-T  (1)Packing Type (2)Package Type (3)Green Package	(1) T: Tube (2) TA3: TO-220, TF1: TO-220F1, TF3: TO-220F, TF3T: TO-220F3, T2Q: TO-262 (3) G: Halogen Free and Lead Free, L: Lead Free
---	--

## ■ MARKING

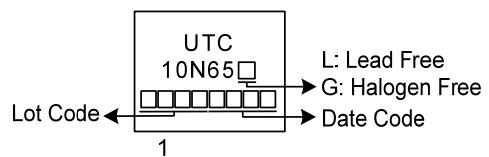

■ ABSOLUTE MAXIMUM RATINGS ( $T_c = 25^\circ\text{C}$ , unless otherwise specified)

PARAMETER		SYMBOL	RATINGS	UNIT
Drain-Source Voltage		$V_{DSS}$	650	V
Gate-Source Voltage		$V_{GSS}$	$\pm 30$	V
Drain Current	Continuous	$I_D$	10	A
	Pulsed (Note 2)	$I_{DM}$	20	A
Avalanche Energy	Single Pulsed (Note 3)	$E_{AS}$	840	mJ
Peak Diode Recovery dv/dt (Note 4)		dv/dt	2.94	V/ns
Power Dissipation	TO-220/TO-262	$P_D$	155	W
	TO-220F/TO-220F1		38	W
	TO-220F3			
Junction Temperature		$T_J$	+150	$^\circ\text{C}$
Storage Temperature		$T_{STG}$	-55 ~ +150	$^\circ\text{C}$

Notes: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

2. Repetitive Rating: Pulse width limited by maximum junction temperature.

3.  $L = 100\text{mH}$ ,  $V_{DD} = 50\text{V}$ ,  $R_G = 25 \Omega$  Starting  $T_J = 25^\circ\text{C}$

4.  $I_{SD} \leq 10\text{A}$ ,  $di/dt \leq 200\text{A}/\mu\text{s}$ ,  $V_{DD} \leq BV_{DSS}$ , Starting  $T_J = 25^\circ\text{C}$

■ THERMAL DATA

PARAMETER		SYMBOL	RATINGS	UNIT
Junction to Ambient		$\theta_{JA}$	62.5	$^\circ\text{C/W}$
Junction to Case	TO-220/TO-262	$\theta_{JC}$	0.8	$^\circ\text{C/W}$
	TO-220F/TO-220F1		3.28	$^\circ\text{C/W}$
	TO-220F3			


■ ELECTRICAL CHARACTERISTICS ( $T_J = 25^\circ\text{C}$ , unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
<b>OFF CHARACTERISTICS</b>						
Drain-Source Breakdown Voltage	$\text{BV}_{\text{DSS}}$	$V_{\text{GS}}=0\text{V}, I_{\text{D}}=250\mu\text{A}$	650			V
Drain-Source Leakage Current	$I_{\text{DSS}}$	$V_{\text{DS}}=650\text{V}, V_{\text{GS}}=0\text{V}$		10		$\mu\text{A}$
Gate-Source Leakage Current	Forward	$V_{\text{GS}}=30\text{V}, V_{\text{DS}}=0\text{V}$		100		nA
	Reverse	$V_{\text{GS}}=-30\text{V}, V_{\text{DS}}=0\text{V}$		-100		nA
<b>ON CHARACTERISTICS</b>						
Gate Threshold Voltage	$V_{\text{GS(TH)}}$	$V_{\text{DS}}=V_{\text{GS}}, I_{\text{D}}=250\mu\text{A}$	2.0		4.0	V
Static Drain-Source On-State Resistance	$R_{\text{DS(ON)}}$	$V_{\text{GS}}=10\text{V}, I_{\text{D}}=5.0\text{A}$		0.75	0.9	$\Omega$
<b>DYNAMIC CHARACTERISTICS</b>						
Input Capacitance	$C_{\text{ISS}}$	$V_{\text{GS}}=0\text{V}, V_{\text{DS}}=25\text{V}, f=1.0 \text{ MHz}$		1554		pF
Output Capacitance	$C_{\text{OSS}}$			158		pF
Reverse Transfer Capacitance	$C_{\text{RSS}}$			4.4		pF
<b>SWITCHING CHARACTERISTICS</b>						
Total Gate Charge (Note 1)	$Q_G$	$V_{\text{DS}}=520\text{V}, V_{\text{GS}}=10\text{V}, I_{\text{D}}=10\text{A}$ $I_G=1\text{mA}$ (Note 1, 2)		34		nC
Gatesource Charge	$Q_{\text{GS}}$			12		nC
Gate-Drain Charge	$Q_{\text{GD}}$			7.4		nC
Turn-on Delay Time (Note 1)	$t_{\text{D(ON)}}$	$V_{\text{DS}}=325\text{V}, V_{\text{GS}}=10\text{V}, I_{\text{D}}=10\text{A}, R_G=25\Omega$ (Note 1, 2)		26		ns
Rise Time	$t_R$			21		ns
Turn-off Delay Time	$t_{\text{D(OFF)}}$			80		ns
Fall-Time	$t_F$			23		ns
<b>SOURCE- DRAIN DIODE RATINGS AND CHARACTERISTICS</b>						
Maximum Body-Diode Continuous Current	$I_S$				10	A
Maximum Body-Diode Pulsed Current	$I_{\text{SM}}$				40	A
Drain-Source Diode Forward Voltage (Note 1)	$V_{\text{SD}}$	$V_{\text{GS}}=0\text{V}, I_{\text{S}}=10\text{A}$			1.4	V
Reverse Recovery Time (Note 1)	$t_{\text{rr}}$	$V_{\text{GS}}=0\text{V}, I_{\text{S}}=10\text{A}, \frac{dI_F}{dt}=100\text{A}/\mu\text{s}$ (Note1)		375		ns
Reverse Recovery Charge	$Q_{\text{rr}}$			5.2		$\mu\text{C}$


Notes: 1. Pulse Test : Pulse width  $\leq 300\mu\text{s}$ , Duty cycle  $\leq 2\%$ .

2. Essentially independent of operating temperature.

■ TEST CIRCUITS AND WAVEFORMS


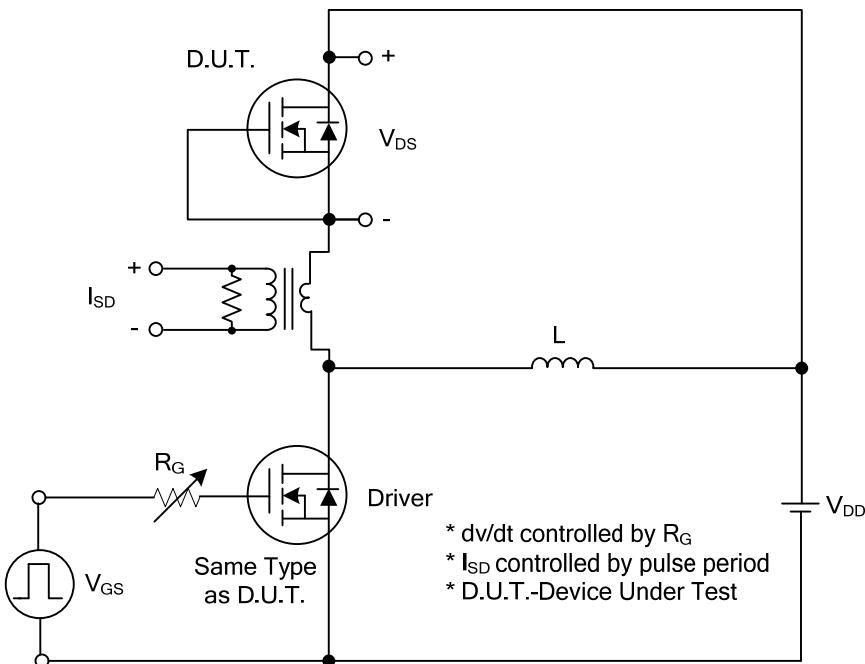


Peak Diode Recovery dv/dt Test Circuit

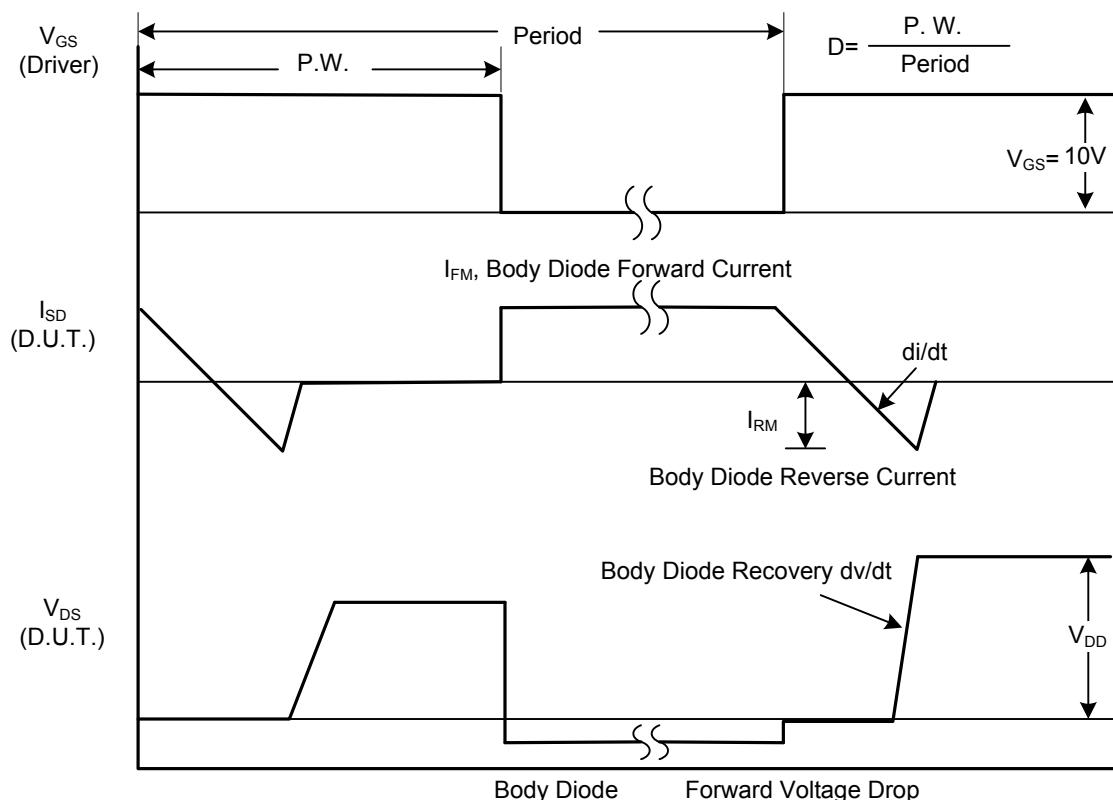



Peak Diode Recovery dv/dt Waveforms

### ■ TEST CIRCUITS AND WAVEFORMS

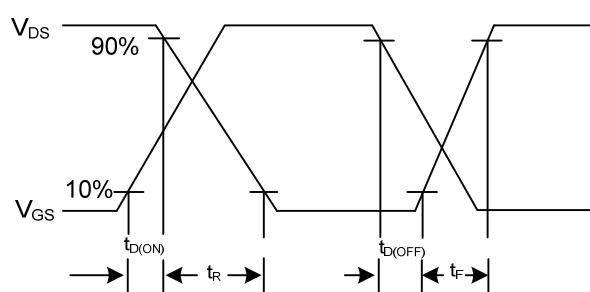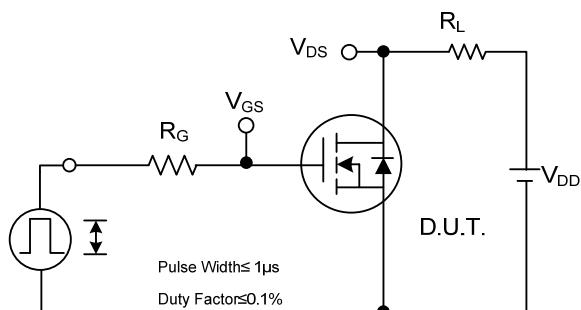



**Switching Test Circuit**

**Switching Waveforms**

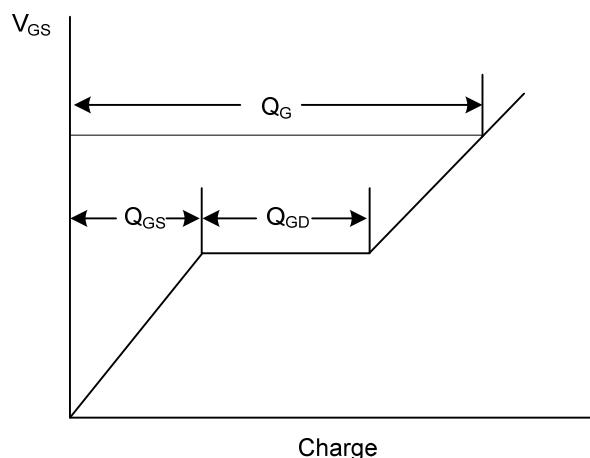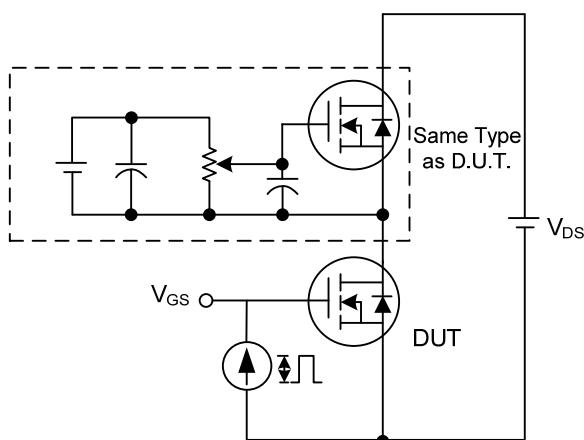

**Gate Charge Test Circuit**







**Gate Charge Waveform**

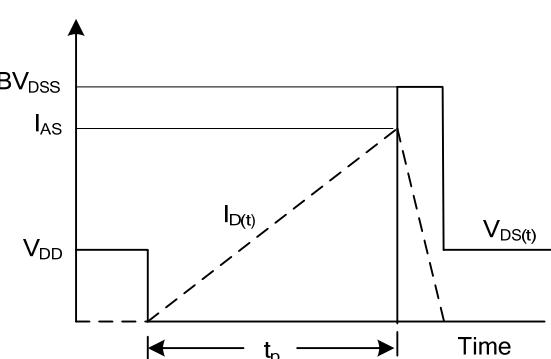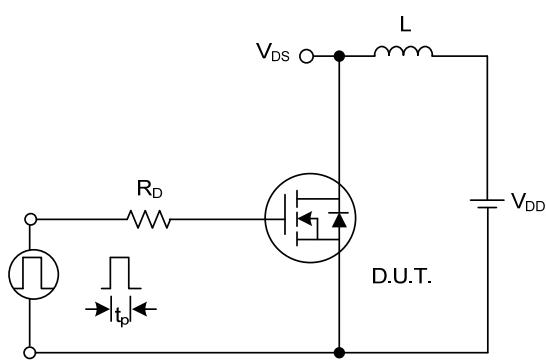







**Unclamped Inductive Switching Test Circuit**

**Unclamped Inductive Switching Waveforms**


## ■ TYPICAL CHARACTERISTICS

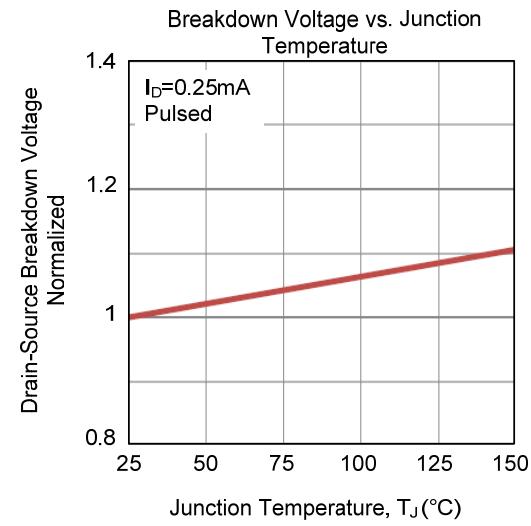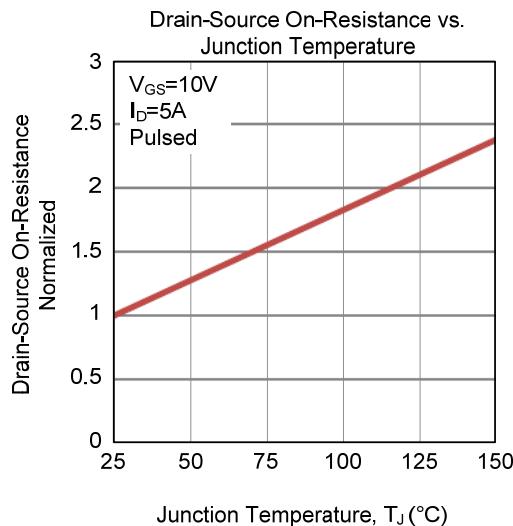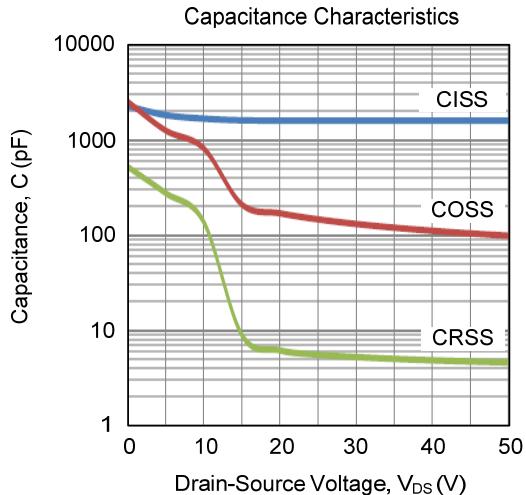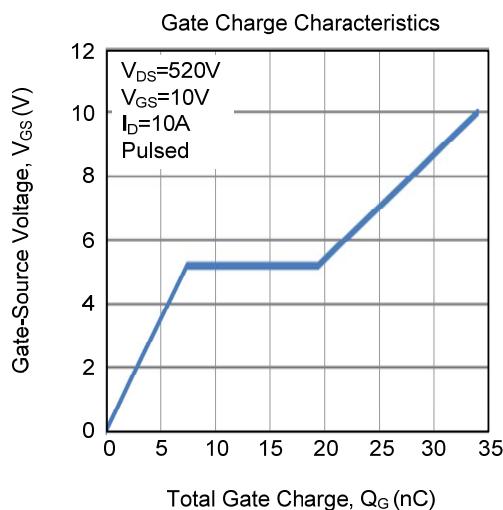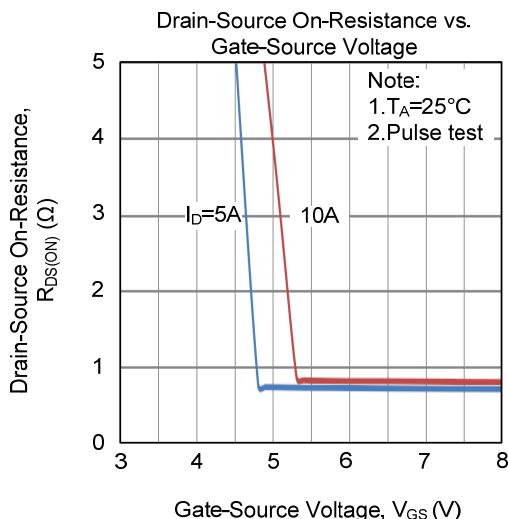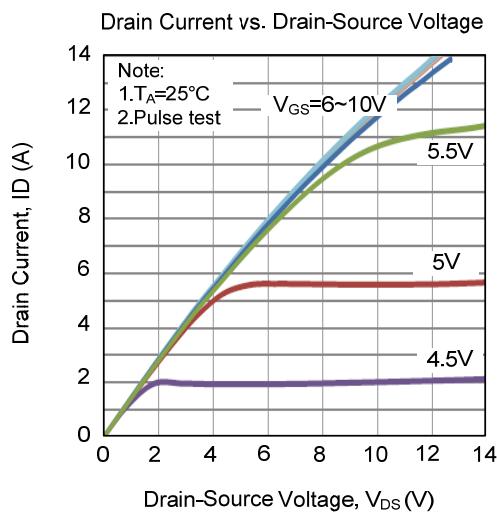

## ■ TYPICAL CHARACTERISTICS (Cont.)

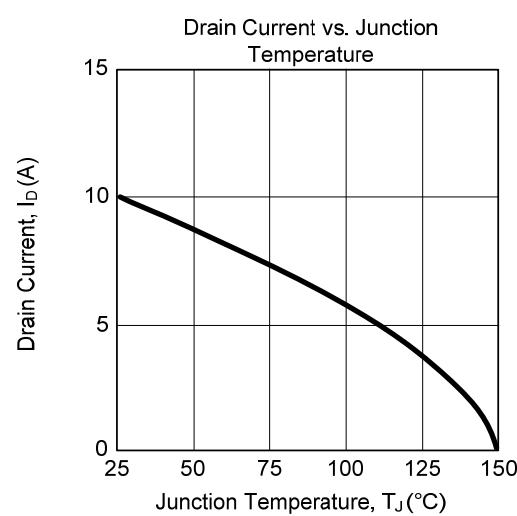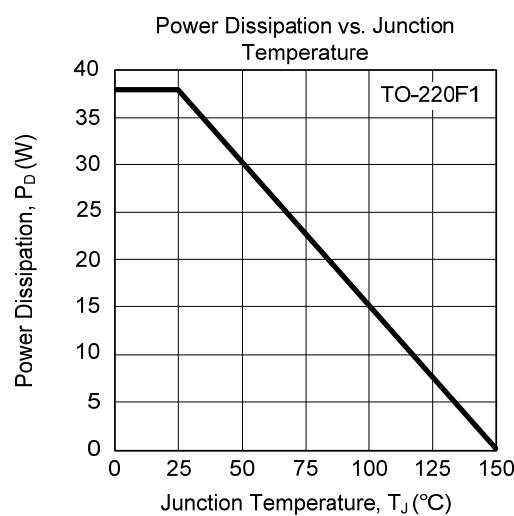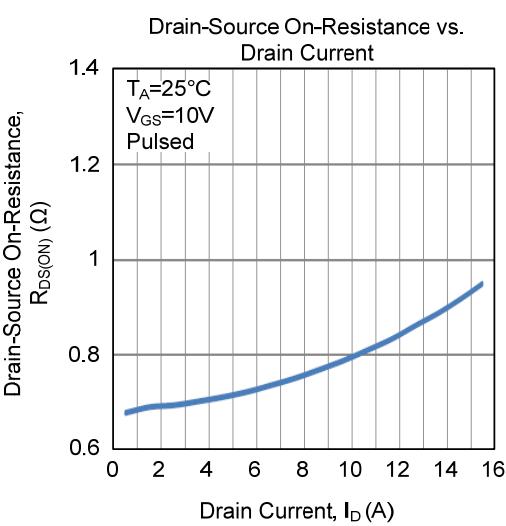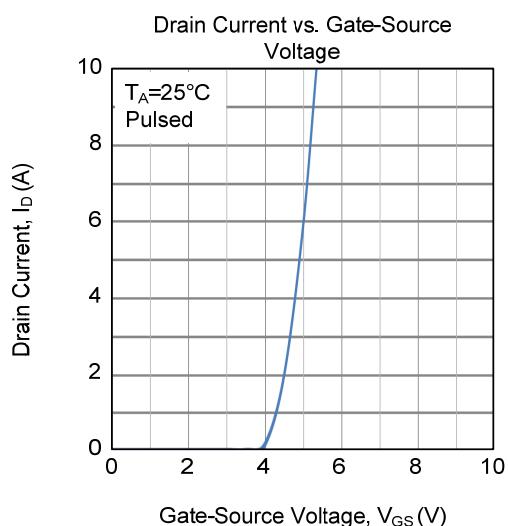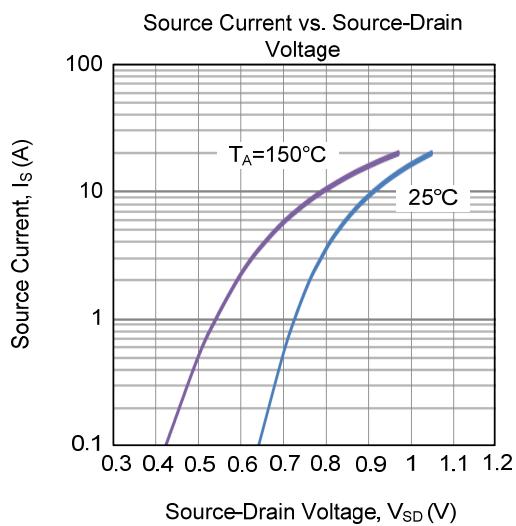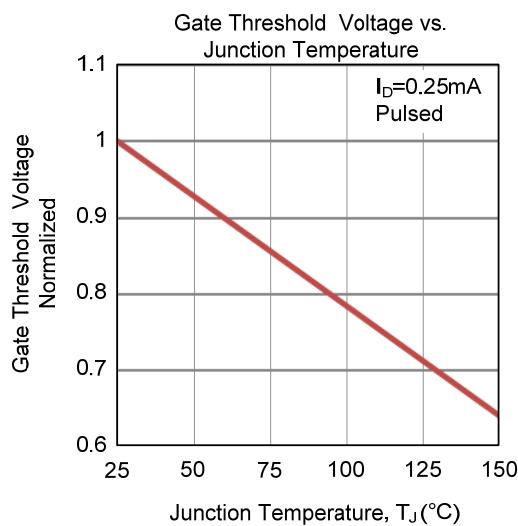

## ■ TYPICAL CHARACTERISTICS (Cont.)

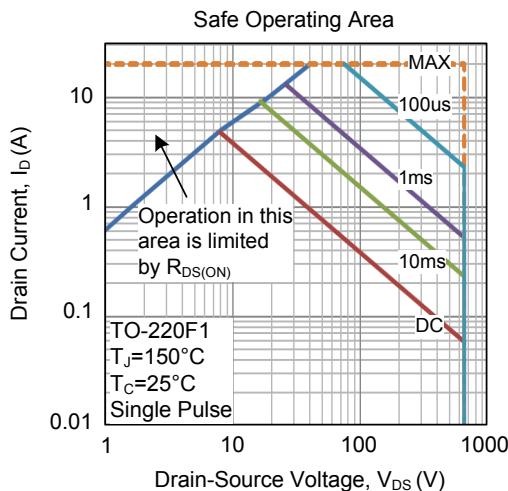

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for MOSFET category:***

***Click to view products by Unisonic manufacturer:***

Other Similar products are found below :

[IRFD120](#) [JANTX2N5237](#) [BUK455-60A/B](#) [MIC4420CM-TR](#) [VN1206L](#) [NDP4060](#) [SI4482DY](#) [IPS70R2K0CEAKMA1](#) [SQD23N06-31L-GE3](#)  
[TK16J60W,S1VQ\(O](#) [2SK2614\(TE16L1,Q\)](#) [DMN1017UCP3-7](#) [DMN1053UCP4-7](#) [SQJ469EP-T1-GE3](#) [NTE2384](#) [DMC2700UDMQ-7](#)  
[DMN2080UCB4-7](#) [DMN61D9UWQ-13](#) [US6M2GTR](#) [DMN31D5UDJ-7](#) [DMP22D4UFO-7B](#) [DMN1006UCA6-7](#) [DMN16M9UCA6-7](#)  
[STF5N65M6](#) [IRF40H233XTMA1](#) [STU5N65M6](#) [DMN6022SSD-13](#) [DMN13M9UCA6-7](#) [DMTH10H4M6SPS-13](#) [DMN2990UFB-7B](#)  
[IPB80P04P405ATMA2](#) [2N7002W-G](#) [MCAC30N06Y-TP](#) [MCQ7328-TP](#) [NTMC083NP10M5L](#) [BXP7N65D](#) [BXP4N65F](#) [AOL1454G](#)  
[WMJ80N60C4](#) [BXP2N20L](#) [BXP2N65D](#) [BXT1150N10J](#) [BXT1700P06M](#) [TSM60NB380CP ROG](#) [RQ7L055BGTCR](#) [DMNH15H110SK3-13](#)  
[SLF10N65ABV2](#) [BSO203SP](#) [BSO211P](#) [IPA60R230P6](#)