



## 10N90-FL

Power MOSFET

### 10A, 900V N-CHANNEL POWER MOSFET



#### DESCRIPTION

The UTC **10N90-FL** is a high voltage power MOSFET combines advanced trench MOSFET designed to have better characteristics, such as fast switching time, low gate charge, low on-state resistance and high rugged avalanche characteristics. This power MOSFET is usually used in high speed switching applications of switching power supplies and adaptors.

#### FEATURES

- \*  $R_{DS(ON)} \leq 1.7 \Omega @ V_{GS}=10V, I_D=5.0A$
- \* Fast switching capability
- \* Avalanche energy tested
- \* Improved dv/dt capability, high ruggedness

#### SYMBOL

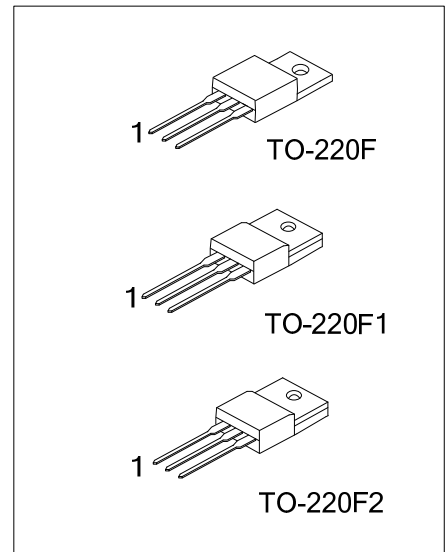


#### ORDERING INFORMATION

Ordering Number		Package	Pin Assignment			Packing
Lead Free	Halogen Free		1	2	3	
10N90L-TF1-T	10N90G-TF1-T	TO-220F1	G	D	S	Tube
10N90L-TF2-T	10N90G-TF2-T	TO-220F2	G	D	S	Tube
10N90L-TF3-T	10N90G-TF3-T	TO-220F	G	D	S	Tube

Note: Pin Assignment: G: Gate D: Drain S: Source

<p>10N90G-TF1-T</p> <p>(1)Packing Type (2)Package Type (3)Green Package</p>	<p>(1) T: Tube (2) TF1: TO-220F1, TF2: TO-220F2, TF3: TO-220F (3) G: Halogen Free and Lead Free, L: Lead Free</p>
---	---

#### MARKING

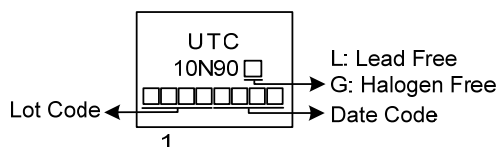

### ■ ABSOLUTE MAXIMUM RATINGS (T<sub>c</sub>=25°C, unless otherwise specified)

PARAMETER	SYMBOL	RATINGS	UNIT	
Drain-Source Voltage	V <sub>DSS</sub>	900	V	
Gate-Source Voltage	V <sub>GSS</sub>	±30	V	
Continuous Drain Current	I <sub>D</sub>	10	A	
Pulsed Drain Current (Note 2)	I <sub>DM</sub>	20	A	
Avalanche Energy	Single Pulsed (Note 3)	E <sub>AS</sub>	122	mJ
Peak Diode Recovery dv/dt (Note 4)				
Power Dissipation	P <sub>D</sub>	38.5	W	
Junction Temperature	T <sub>J</sub>	+150	°C	
Storage Temperature	T <sub>STG</sub>	-55 ~ +150	°C	

Notes: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

2. Repetitive Rating: Pulse width limited by maximum junction temperature.

3. L = 10mH, I<sub>AS</sub> = 4.94A, V<sub>DD</sub> = 100V, R<sub>G</sub> = 25 Ω, Starting T<sub>J</sub> = 25°C

4. I<sub>SD</sub> ≤ 10A, di/dt ≤ 200A/μs, V<sub>DD</sub> ≤ BV<sub>DSS</sub>, Starting T<sub>J</sub> = 25°C

### ■ THERMAL DATA

PARAMETER	SYMBOL	RATING	UNIT
Junction to Ambient	θ <sub>JA</sub>	62.5	°C/W
Junction to Case	θ <sub>JC</sub>	3.24	°C/W


### ■ ELECTRICAL CHARACTERISTICS (T<sub>J</sub>=25°C, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
<b>OFF CHARACTERISTICS</b>						
Drain-Source Breakdown Voltage	BV <sub>DSS</sub>	V <sub>GS</sub> =0V, I <sub>D</sub> =250μA	900			V
Drain-Source Leakage Current	I <sub>DSS</sub>	V <sub>DS</sub> =900V, V <sub>GS</sub> =0V			10	μA
Gate- Source Leakage Current	I <sub>GSS</sub>	Forward			100	nA
		Reverse			-100	nA
<b>ON CHARACTERISTICS</b>						
Gate Threshold Voltage	V <sub>GS(TH)</sub>	V <sub>DS</sub> =V <sub>GS</sub> , I <sub>D</sub> =250μA	3.0		5.0	V
Static Drain-Source On-State Resistance	R <sub>DS(ON)</sub>	V <sub>GS</sub> =10V, I <sub>D</sub> =5.0A			1.7	Ω
<b>DYNAMIC CHARACTERISTICS</b>						
Input Capacitance	C <sub>ISS</sub>	V <sub>DS</sub> =25V, V <sub>GS</sub> =0V, f=1.0MHz		1880		pF
Output Capacitance	C <sub>OSS</sub>			148		pF
Reverse Transfer Capacitance	C <sub>RSS</sub>			6.3		pF
<b>SWITCHING CHARACTERISTICS</b>						
Total Gate Charge (Note 1)	Q <sub>G</sub>	V <sub>DS</sub> =720V, V <sub>GS</sub> =10V, I <sub>D</sub> =10A I <sub>G</sub> =1mA (Note 1, 2)		40.5		nC
Gate-Source Charge	Q <sub>GS</sub>			16.9		nC
Gate-Drain Charge	Q <sub>GD</sub>			9.7		nC
Turn-On Delay Time (Note 1)	t <sub>D(ON)</sub>	V <sub>DS</sub> =100V, V <sub>GS</sub> =10V, I <sub>D</sub> =10A, R <sub>G</sub> =25Ω (Note 1, 2)		42.4		ns
Turn-On Rise Time	t <sub>R</sub>			20.7		ns
Turn-Off Delay Time	t <sub>D(OFF)</sub>			86.4		ns
Turn-Off Fall Time	t <sub>F</sub>			35.3		ns
<b>DRAIN-SOURCE DIODE CHARACTERISTICS AND MAXIMUM RATINGS</b>						
Maximum Body-Diode Continuous Current	I <sub>S</sub>				10	A
Maximum Body-Diode Pulsed Current	I <sub>SM</sub>				20	A
Drain-Source Diode Forward Voltage (Note 1)	V <sub>SD</sub>	I <sub>S</sub> =10A, V <sub>GS</sub> =0V			1.4	V
Reverse Recovery Time (Note 1)	t <sub>rr</sub>	I <sub>S</sub> =10A, V <sub>GS</sub> =0V di/dt=100A/μs		641		ns
Reverse Recovery Charge	Q <sub>rr</sub>			19.8		μC


Notes: 1. Pulse Test: Pulse width ≤ 300μs, Duty cycle ≤ 2%.

2. Essentially independent of operating temperature.

## ■ TEST CIRCUITS AND WAVEFORMS

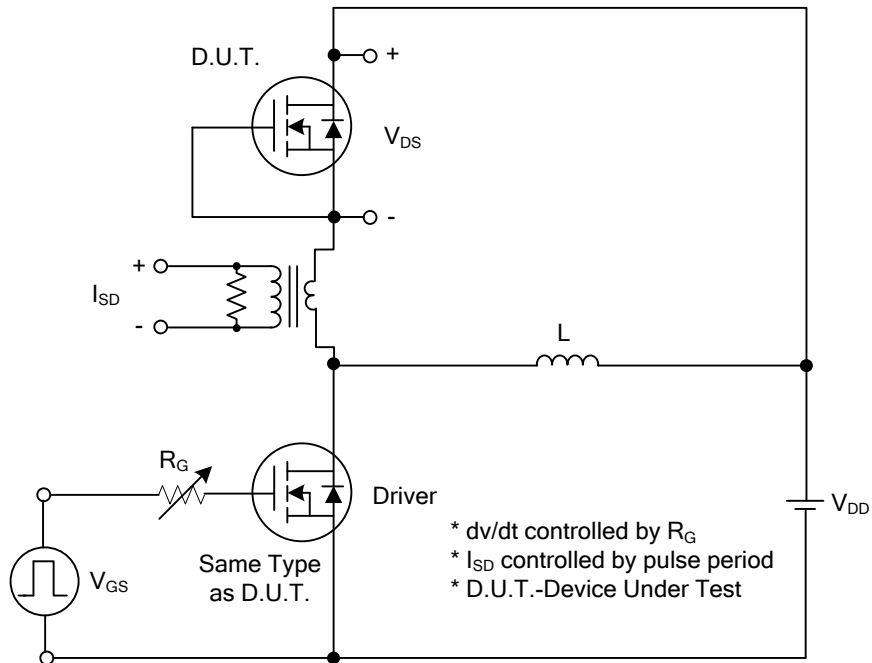


**Peak Diode Recovery dv/dt Test Circuit**

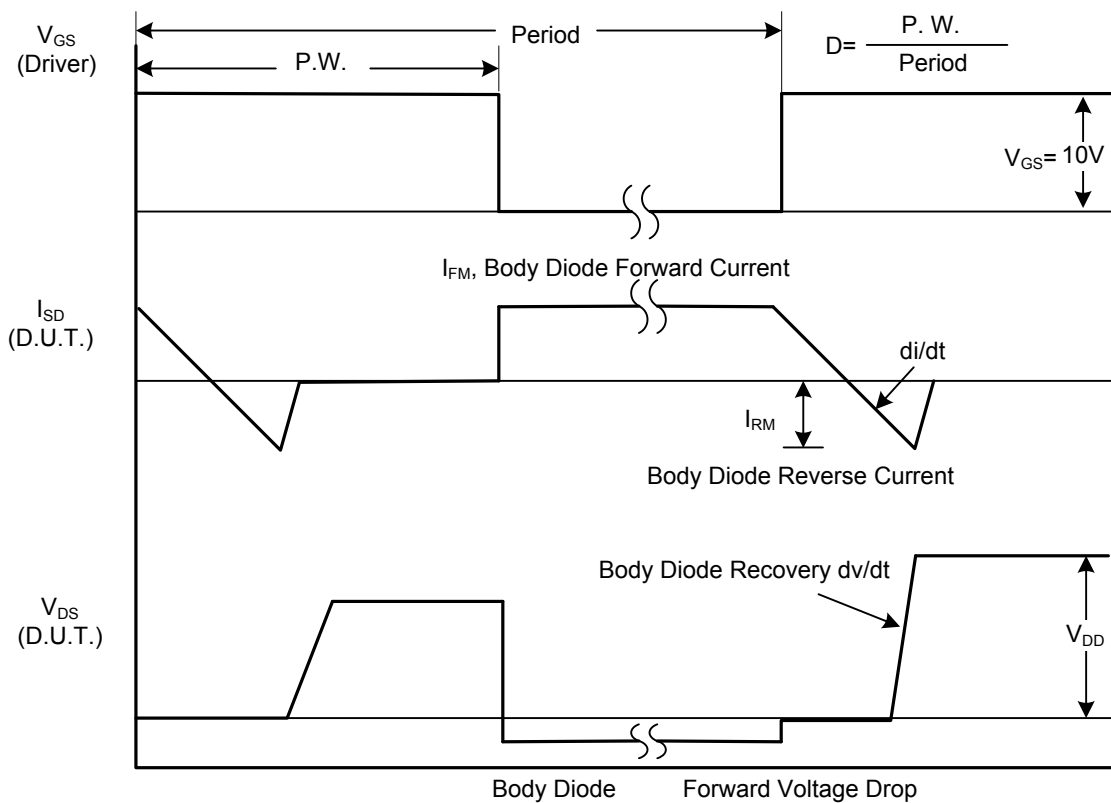


**Peak Diode Recovery dv/dt Waveforms**


## TEST CIRCUITS AND WAVEFORMS

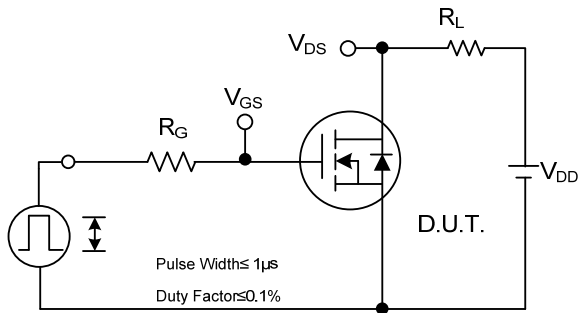


**Switching Test Circuit**

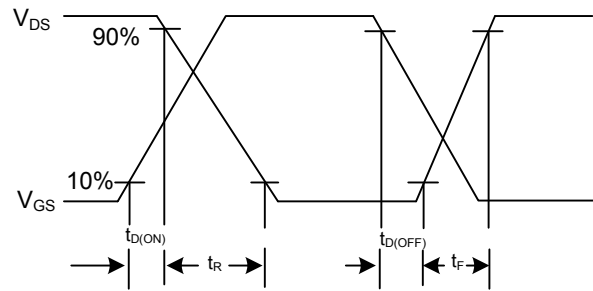


**Switching Waveforms**

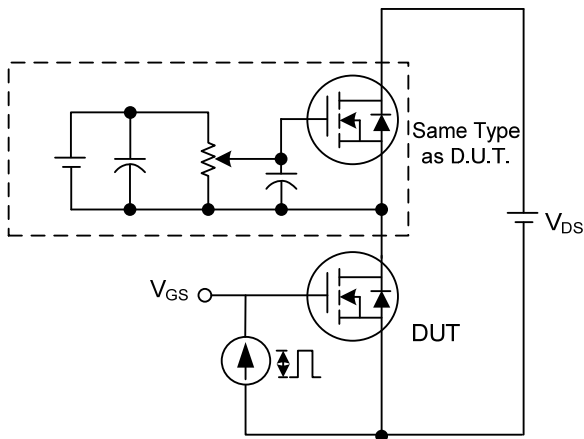


**Gate Charge Test Circuit**

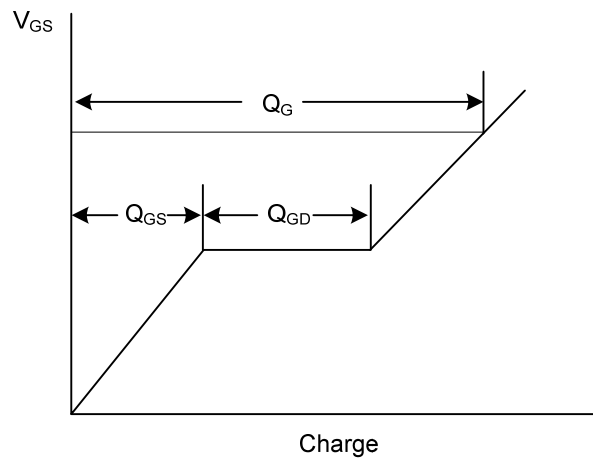

**Gate Charge Waveform**






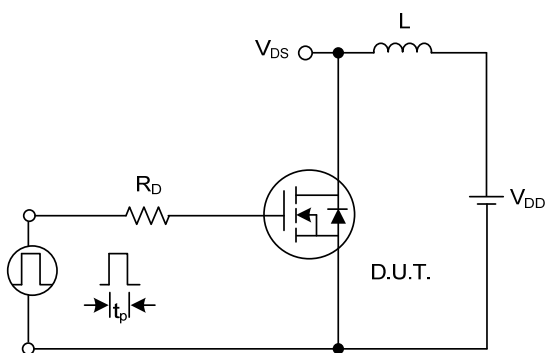


**Unclamped Inductive Switching Test Circuit**






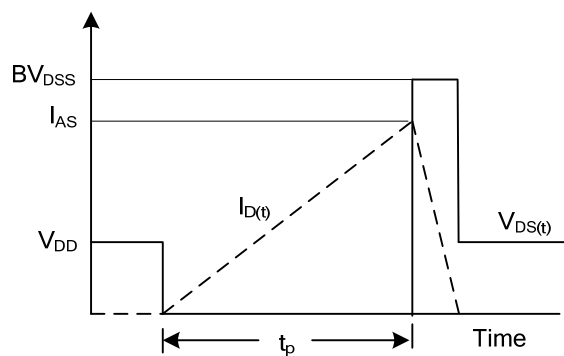


**Unclamped Inductive Switching Waveforms**


## TYPICAL CHARACTERISTICS

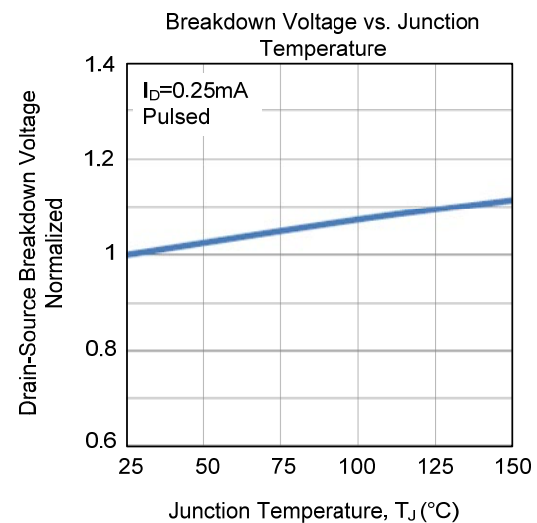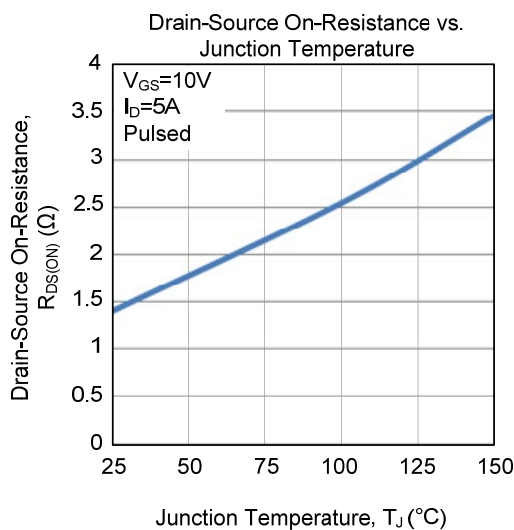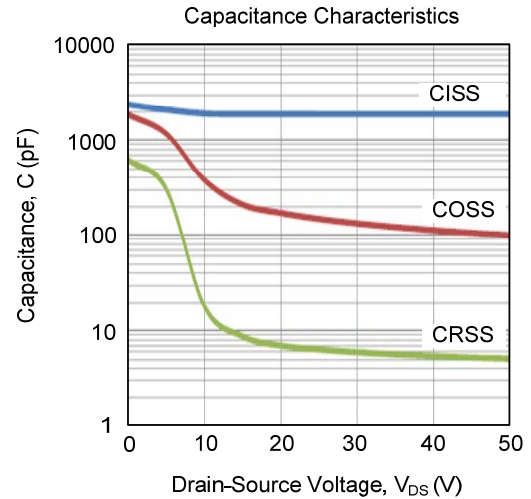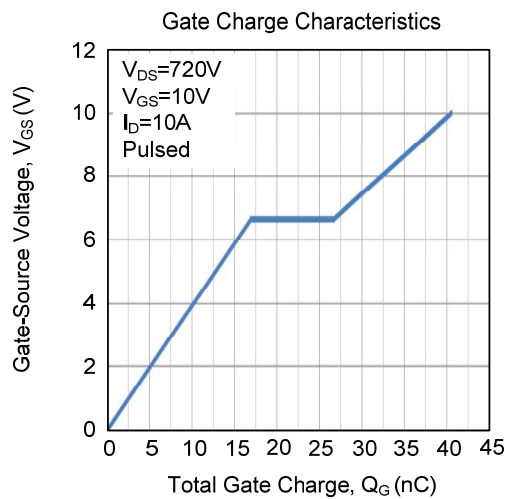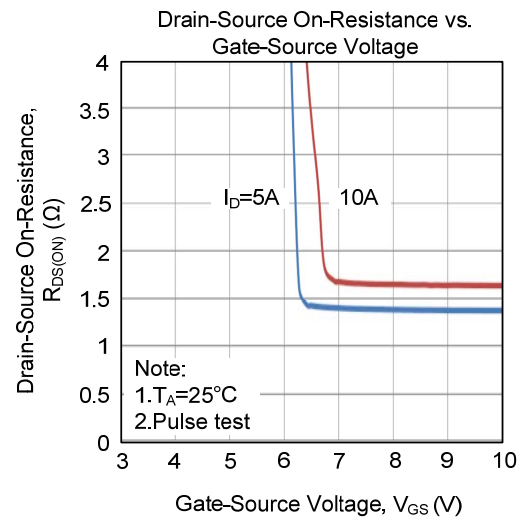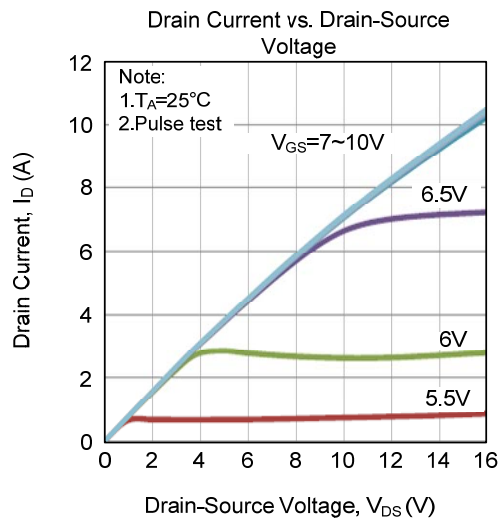

■ TYPICAL CHARACTERISTICS (Cont.)

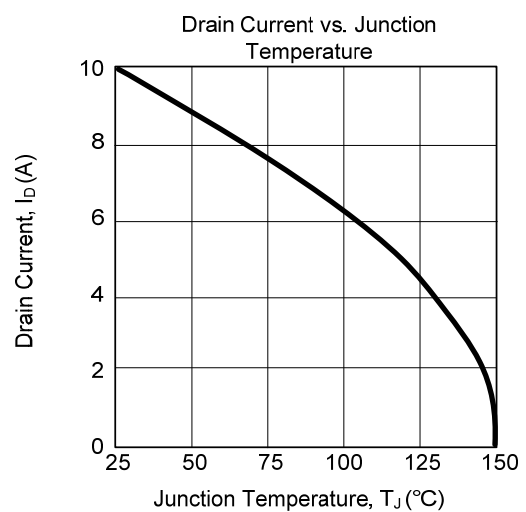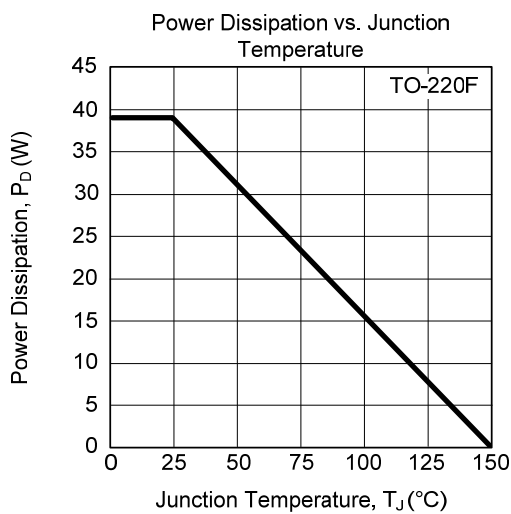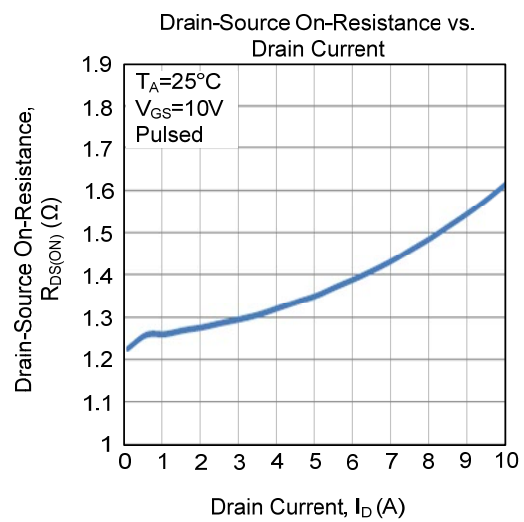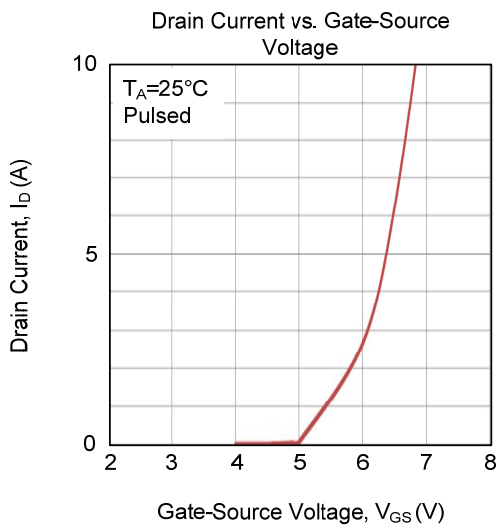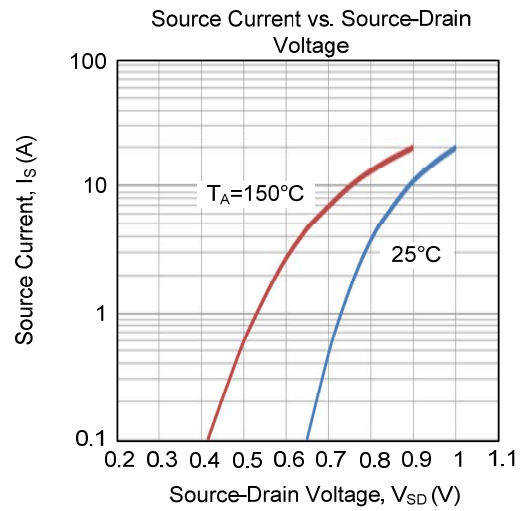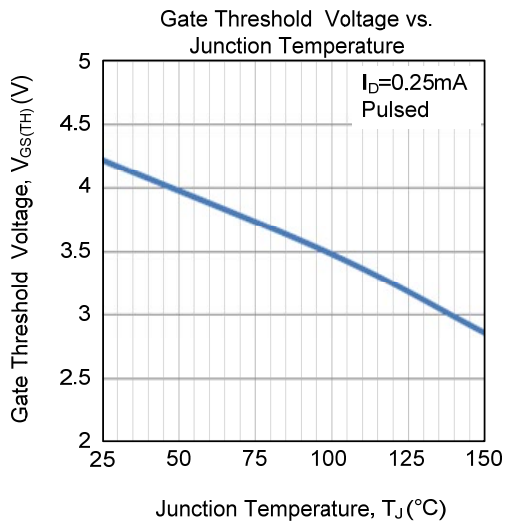

■ TYPICAL CHARACTERISTICS (Cont.)

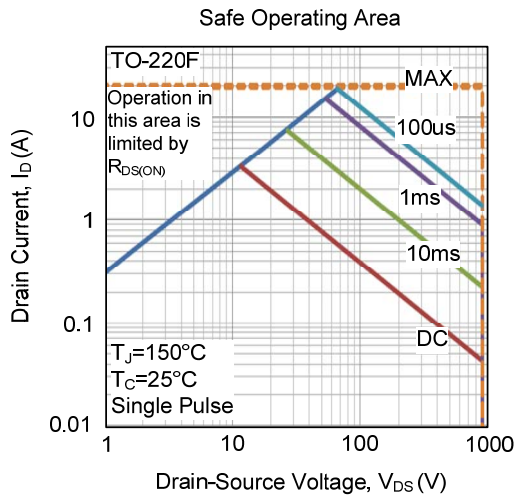

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [MOSFET](#) category:*

*Click to view products by [Unisonic](#) manufacturer:*

Other Similar products are found below :

[IRFD120](#) [JANTX2N5237](#) [2SK2267\(Q\)](#) [BUK455-60A/B](#) [TK100A10N1,S4X\(S](#) [MIC4420CM-TR](#) [VN1206L](#) [NDP4060](#) [SI4482DY](#)  
[IRS2092STRPBF-EL](#) [IPS70R2K0CEAKMA1](#) [TK31J60W5,S1VQ\(O](#) [TK31J60W,S1VQ\(O](#) [TK16J60W,S1VQ\(O](#) [2SK2614\(TE16L1,Q\)](#)  
[DMN1017UCP3-7](#) [EFC2J004NUZTDG](#) [P85W28HP2F-7071](#) [DMN1053UCP4-7](#) [NTE2384](#) [DMC2700UDMQ-7](#) [DMN2080UCB4-7](#)  
[DMN61D9UWQ-13](#) [US6M2GTR](#) [DMN31D5UDJ-7](#) [DMP22D4UFO-7B](#) [IPS60R3K4CEAKMA1](#) [DMN1006UCA6-7](#) [DMN16M9UCA6-7](#)  
[STF5N65M6](#) [IRF40H233XTMA1](#) [STU5N65M6](#) [DMN6022SSD-13](#) [DMN13M9UCA6-7](#) [DMTH10H4M6SPS-13](#) [IPS60R360PFD7SAKMA1](#)  
[DMN2990UFB-7B](#) [SSM3K35CT,L3F](#) [IPLK60R1K0PFD7ATMA1](#) [2N7002W-G](#) [MCAC30N06Y-TP](#) [IPWS65R035CFD7AXKSA1](#)  
[MCQ7328-TP](#) [SSM3J143TU,LXHF](#) [DMN12M3UCA6-7](#) [PJMF280N65E1\\_T0\\_00201](#) [PJMF380N65E1\\_T0\\_00201](#)  
[PJMF280N60E1\\_T0\\_00201](#) [PJMF600N65E1\\_T0\\_00201](#) [PJMF900N65E1\\_T0\\_00201](#)