



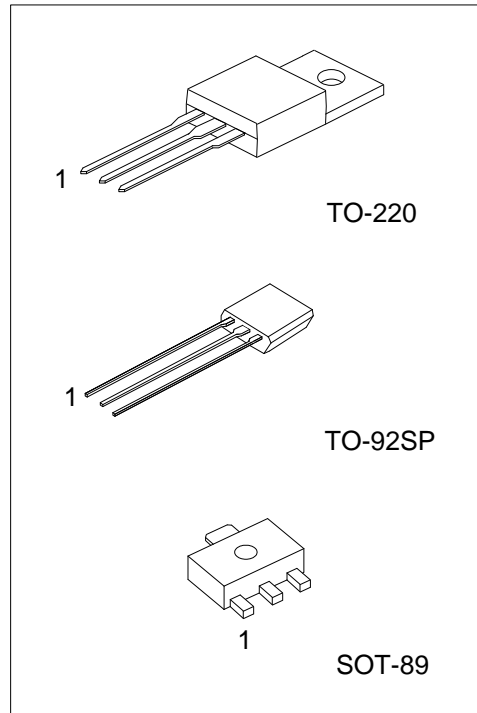
2SD2470

NPN SILICON TRANSISTOR

STROBO AND DC/DC CONVERTERS

■ FEATURES

- * Low saturation voltage
V = 0.25V (typ) at I_C/I_B = 3A/0.1A
- * Collector current of 5A is possible






■ ORDERING INFORMATION

Ordering Number		Package	Pin Assignment			Packing
Lead Free	Halogen Free		1	2	3	
2SD2470L-x-AB3-R	2SD2470G-x-AB3-R	SOT-89	B	C	E	Tape Reel
2SD2470L-x-TA3-T	2SD2470G-x-TA3-T	TO-220	E	C	B	Tube
2SD2470L-x-T9S-B	2SD2470G-x-T9S-B	TO-92SP	E	C	B	Tape Box
2SD2470L-x-T9S-K	2SD2470G-x-T9S-K	TO-92SP	E	C	B	Bulk

Note: Pin Assignment: E: Emitter C: Collector B: Base

<p>2SD2470G-x-AB3-R</p>	<p>(1) R: Tape Reel, T: Tube, B: Tape Box, K: Bulk (2) AB3: SOT-89, TA3: TO-220, T9S: TO-92SP (3) refer to Classification of h_{FE} (4) G: Halogen Free and Lead Free, L: Lead Free</p>
-------------------------	--

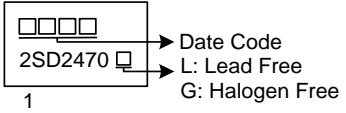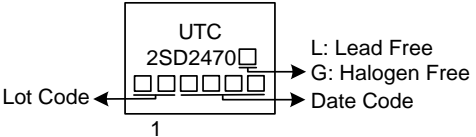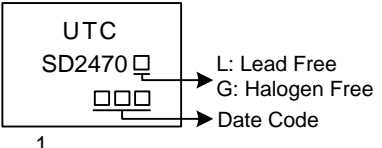MARKING INFORMATION

PACKAGE	MARKING
SOT-89	
TO-220	
TO-92SP	

■ **ABSOLUTE MAXIMUM RATING** ($T_A=25^{\circ}\text{C}$, unless otherwise noted)

PARAMETER	SYMBOL	RATINGS	UNIT
Collector-Base Voltage	V_{CBO}	15	V
Collector-Emitter Voltage	V_{CEO}	10	V
Emitter-Base Voltage	V_{EBO}	10	V
Collector Current (DC)	I_C	5	A
Collector Current (PULSE) (Note 2)	I_{CP}	8	A
Collector Power Dissipation	SOT-89	0.5	W
	TO-220	2	W
	TO-92SP	0.4	W
Junction Temperature	T_J	+150	$^{\circ}\text{C}$
Storage Temperature	T_{STG}	-55 ~ +150	$^{\circ}\text{C}$

Note: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

2. Single Pulse =10ms


■ **ELECTRICAL CHARACTERISTICS** ($T_A=25^{\circ}\text{C}$, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Collector Base Breakdown Voltage	BV_{CBO}	$I_C=50\mu\text{A}$	15			V
Collector Emitter Breakdown Voltage	BV_{CEO}	$I_C=1\text{mA}$	10			V
Emitter Base Breakdown Voltage	BV_{EBO}	$I_E=50\mu\text{A}$	10			V
Collector Cut-Off Current	I_{CBO}	$V_{CB}=10\text{V}, I_E=0$			0.1	μA
Emitter Cut-Off Current	I_{EBO}	$V_{EB}=8\text{V}, I_C=0$			0.5	μA
DC Current Gain	h_{FE}	$V_{CE}=2\text{V}, I_C=2\text{A}$	270		820	
Collector-Emitter Saturation Voltage	$V_{CE(SAT)}$	$I_C/I_B=3\text{A}/0.1\text{A}$		0.25	0.5	V
Transition Frequency	f_T	$V_{CE}=6\text{V}, I_E=0.05\text{A}, f=100\text{MHz}$		170		MHz
Output Capacitance	C_{ob}	$V_{CB}=10\text{V}, I_E=0\text{A}, f=1\text{MHz}$		30		pF

■ **CLASSIFICATION OF h_{FE}**

RANK	S	E
RANGE	270~560	450~820

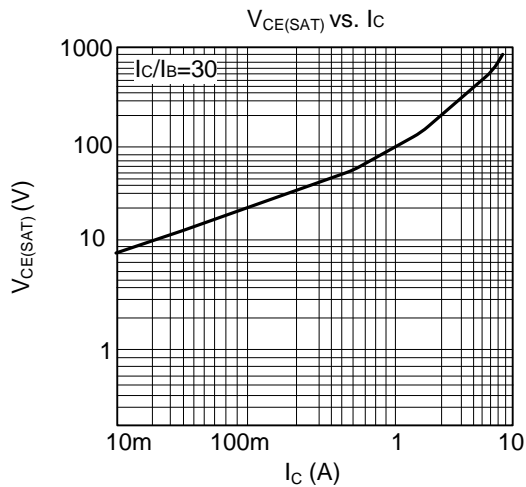■ TYPICAL CHARACTERISTICS



UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Bipolar Transistors - BJT category](#):

Click to view products by [Unisonic manufacturer](#):

Other Similar products are found below :

[BC559C](#) [MCH4017-TL-H](#) [MMBT-2369-TR](#) [BC546/116](#) [NJVMJD148T4G](#) [NTE16](#) [NTE195A](#) [IMX9T110](#) [2N4401-A](#) [2N4403](#) [2N6728](#)
[2SA1419T-TD-H](#) [2SA2126-E](#) [2SB1204S-TL-E](#) [FMC5AT148](#) [2N2369ADCSM](#) [2N2907A](#) [2N3904-NS](#) [2N5769](#) [2SC4618TLN](#) [CPH6501-](#)
[TL-E](#) [MCH4021-TL-E](#) [Jantx2N5416](#) [US6T6TR](#) [BAX18/A52R](#) [BC556/112](#) [IMZ2AT108](#) [MMST8098T146](#) [UMX21NTR](#) [MCH6102-TL-E](#)
[TTA1452B,S4X\(S](#) [2N3879](#) [NTE13](#) [NTE282](#) [NTE323](#) [NTE350](#) [NTE81](#) [JANTX2N2920L](#) [JANTX2N3735](#) [JANSR2N2222AUB](#)
[CMLT3946EG TR](#) [SNSS40600CF8T1G](#) [CMLT3906EG TR](#) [GRP-DATA-JANS2N2907AUB](#) [GRP-DATA-JANS2N2222AUA](#)
[MMDT3946FL3-7](#) [2N4240](#) [JANS2N3019](#) [MSB30KH-13](#) [2N2221AUB](#)