

79DXXA**LINEAR INTEGRATED CIRCUIT****3 TERMINAL 1A NEGATIVE VOLTAGE REGULATOR****■ DESCRIPTION**

The UTC 79DXXA series of three-terminal negative regulators is available several fixed output voltage, making them useful in a wide range of application. Each type employs internal current limiting, thermal shut-down, making it essentially indestructible.


■ FEATURES


- * Output current up to 1A
- * -5V, -6V, -7V, -8V, -9V, -12V, -15V, -18V, -24V output voltage available
- * Thermal overload protection

■ ORDERING INFORMATION

Ordering Number		Package	Pin Assignment			Packing
Lead Free	Halogen Free		1	2	3	
79DXXAL-TM3-T	79DXXAG-TM3-T	TO-251	G	I	O	Tube
79DXXAL-TN3-T	79DXXAG-TN3-T	TO-252	G	I	O	Tube
79DXXAL-TN3-R	79DXXAG-TN3-R	TO-252	G	I	O	Tape Reel

Note: Pin Assignment: G: GND I: Input O: Output


 79DXXAG-TM3-T	(1)Packing Type (2)Package Type (3)Lead Plating (4)Output Voltage Code	(1) T: Tube, R: Tape Reel (2) TM3: TO-251, TN3: TO-252 (3) G: Halogen Free and Lead Free, L: Lead Free (4) xx: refer to Marking Information
--	---	--

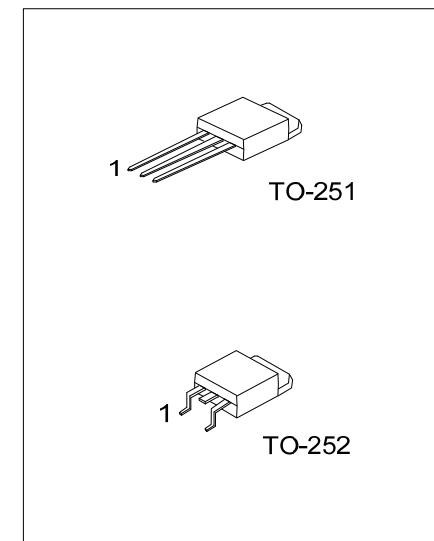

■ MARKING INFORMATION

PACKAGE	VOLTAGE CODE	MARKING
TO-251 TO-252	05:-5V 06:-6V 07:-7V 08:-8V 09:-9V 12:-12V 15:-15V 18:-18V 24:-24V	

■ BLOCK DIAGRAM

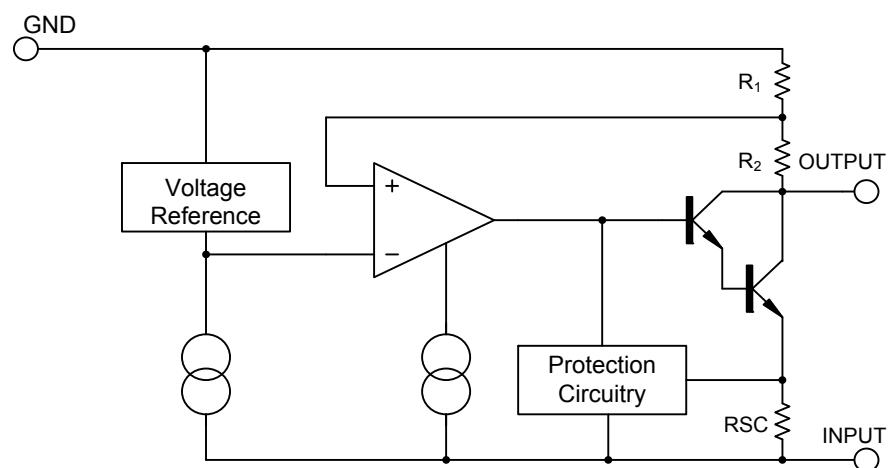

■ ABSOLUTE MAXIMUM RATINGS ($T_A=25^\circ\text{C}$)

PARAMETER	SYMBOL	RATING	UNIT
Input Voltage	V_{IN}	-35	V
Output Current	I_{OUT}	1	A
Power Dissipation	P_D	0.89	W
Operating Temperature	T_{OPR}	0 ~ +125	$^\circ\text{C}$
Storage Temperature	T_{STG}	-65 ~ +150	$^\circ\text{C}$

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ THERMAL DATA

PARAMETER	SYMBOL	RATING	UNIT
Junction to Ambient	θ_{JA}	112	$^\circ\text{C}/\text{W}$
Junction to Case	θ_{JC}	12.5	$^\circ\text{C}/\text{W}$

■ ELECTRICAL CHARACTERISTICS

($I_{OUT}=0.5\text{A}$, $T_J=0^\circ\text{C}\sim125^\circ\text{C}$, $C_I=2.2\mu\text{F}$, $C_O=1\mu\text{F}$, unless otherwise specified)

For UTC 79D05A ($V_{IN}=-10\text{V}$)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	V_{OUT}	$T_J=25^\circ\text{C}$	-4.80	-5.0	-5.20	V
		$V_{IN}=-7\text{V}\sim-20\text{V}$, $I_{OUT}=5\text{mA}\sim1\text{A}$	-4.75		-5.25	V
Dropout Voltage	V_D	$I_{OUT}=1\text{A}$	$T_J=25^\circ\text{C}$	2		V
Line Regulation	ΔV_{OUT}	$V_{IN}=-7\text{V}\sim-25\text{V}$	$T_J=25^\circ\text{C}$	10	100	mV
		$V_{IN}=-8\text{V}\sim-12\text{V}$	$T_J=25^\circ\text{C}$	5	60	mV
Load Regulation	ΔV_{OUT}	$I_{OUT}=5\text{mA}\sim1\text{A}$	$T_J=25^\circ\text{C}$	10	100	mV
		$I_{OUT}=250\text{mA}\sim750\text{mA}$	$T_J=25^\circ\text{C}$	3	50	mV
Quiescent Current	I_Q		$T_J=25^\circ\text{C}$	3	6	mA
Quiescent Current Change	ΔI_Q	$I_{OUT}=5\text{mA}\sim1\text{A}$		0.05	0.5	mA
		$V_{IN}=-7\text{V}\sim-25\text{V}$		0.1	1.3	mA
Output Noise Voltage	e_N	$f=10\text{Hz}\sim100\text{kHz}$	$T_A=25^\circ\text{C}$	100		μV
Output Voltage Drift	$\Delta V_{OUT}/\Delta T$	$I_{OUT}=5\text{mA}$		-0.4		$\text{mV}/^\circ\text{C}$
Ripple Rejection	RR	$V_{IN}=-8\text{V}\sim-18\text{V}$, $f=120\text{Hz}$	54	60		dB
Peak Current	I_{PEAK}		$T_J=25^\circ\text{C}$	2.2		A

For UTC 79D06A ($V_{IN}=-11\text{V}$)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	V_{OUT}	$T_J=25^\circ\text{C}$	-5.76	-6.00	-6.24	V
		$V_{IN}=-8\text{V}\sim-21\text{V}$, $I_{OUT}=5\text{mA}\sim1\text{A}$	-5.70		-6.30	V
Dropout Voltage	V_D	$I_{OUT}=1.0\text{A}$	$T_J=25^\circ\text{C}$	2		V
Line Regulation	ΔV_{OUT}	$V_{IN}=-8\text{V}\sim-25\text{V}$	$T_J=25^\circ\text{C}$	10	120	mV
		$V_{IN}=-9\text{V}\sim-13\text{V}$	$T_J=25^\circ\text{C}$	5	60	mV
Load Regulation	ΔV_{OUT}	$I_{OUT}=5\text{mA}\sim1\text{A}$	$T_J=25^\circ\text{C}$	10	120	mV
		$I_{OUT}=250\text{mA}\sim750\text{mA}$	$T_J=25^\circ\text{C}$	3	60	mV
Quiescent Current	I_Q		$T_J=25^\circ\text{C}$	3	6	mA
Quiescent Current Change	ΔI_Q	$I_{OUT}=5\text{mA}\sim1\text{A}$		0.05	0.5	mA
		$V_{IN}=-8\text{V}\sim-25\text{V}$		0.1	1.3	mA
Output Noise Voltage	e_N	$f=10\text{Hz}\sim100\text{kHz}$	$T_A=25^\circ\text{C}$	130		μV
Output Voltage Drift	$\Delta V_{OUT}/\Delta T$	$I_{OUT}=5\text{mA}$		-0.5		$\text{mV}/^\circ\text{C}$
Ripple Rejection	RR	$V_{IN}=-9\text{V}\sim-19\text{V}$, $f=120\text{Hz}$	54	60		dB
Peak Current	I_{PEAK}		$T_J=25^\circ\text{C}$	2.2		A

■ ELECTRICAL CHARACTERISTICS(Cont.)

For UTC 79D07A ($V_{IN}=-13V$)

PARAMETER	SYMBOL	TEST CONDITIONS		MIN	TYP	MAX	UNIT
Output Voltage	V_{OUT}		$T_J=25^\circ C$	-6.72	-7.0	-7.28	V
		$V_{IN}=-10.5V \sim -23V, I_{OUT}=5mA \sim 1A$		-6.65		-7.35	V
Dropout Voltage	V_D	$I_{OUT}=1A$	$T_J=25^\circ C$		2		V
Line Regulation	ΔV_{OUT}	$V_{IN}=-10.5V \sim -25V$	$T_J=25^\circ C$		10	140	mV
		$V_{IN}=-11.5V \sim -17V$	$T_J=25^\circ C$		5	70	mV
Load Regulation	ΔV_{OUT}	$I_{OUT}=5mA \sim 1A$	$T_J=25^\circ C$		12		mV
		$I_{OUT}=250mA \sim 750mA$	$T_J=25^\circ C$		4		mV
Quiescent Current	I_Q		$T_J=25^\circ C$		3	6	mA
Quiescent Current Change	ΔI_Q	$I_{OUT}=5mA \sim 1A$			0.05	0.5	mA
		$V_{IN}=-11.5V \sim -25V$			0.1	1.3	mA
Output Noise Voltage	eN	$f=10Hz \sim 100kHz$	$T_A=25^\circ C$		175		μV
Output Voltage Drift	$\Delta V_{OUT}/\Delta T$	$I_{OUT}=5mA$			-0.6		$mV/^\circ C$
Ripple Rejection	RR	$V_{IN}=-11.5V \sim -21.5V, f=120Hz$		54	60		dB
Peak Current	I_{PEAK}		$T_J=25^\circ C$		2.2		A

For UTC 79D08A ($V_{IN}=-14V$)

PARAMETER	SYMBOL	TEST CONDITIONS		MIN	TYP	MAX	UNIT
Output Voltage	V_{OUT}		$T_J=25^\circ C$	-7.68	-8.0	-8.32	V
		$V_{IN}=-10.5V \sim -23V, I_{OUT}=5mA \sim 1A$		-7.60		-8.40	V
Dropout Voltage	V_D	$I_{OUT}=1A$	$T_J=25^\circ C$		2		V
Line Regulation	ΔV_{OUT}	$V_{IN}=-10.5V \sim -25V$	$T_J=25^\circ C$		10	160	mV
		$V_{IN}=-11.5V \sim -17V$	$T_J=25^\circ C$		5	80	mV
Load Regulation	ΔV_{OUT}	$I_{OUT}=5mA \sim 1A$	$T_J=25^\circ C$		12	160	mV
		$I_{OUT}=250mA \sim 750mA$	$T_J=25^\circ C$		4	80	mV
Quiescent Current	I_Q		$T_J=25^\circ C$		3	6	mA
Quiescent Current Change	ΔI_Q	$I_{OUT}=5mA \sim 1A$			0.05	0.5	mA
		$V_{IN}=-11.5V \sim -25V$			0.1	1.0	mA
Output Noise Voltage	eN	$f=10Hz \sim 100kHz$	$T_A=25^\circ C$		175		μV
Output Voltage Drift	$\Delta V_{OUT}/\Delta T$	$I_{OUT}=5mA$			-0.6		$mV/^\circ C$
Ripple Rejection	RR	$V_{IN}=-11.5V \sim -21.5V, f=120Hz$		54	60		dB
Peak Current	I_{PEAK}		$T_J=25^\circ C$		2.2		A

For UTC 79D09A ($V_{IN}=-15V$)

PARAMETER	SYMBOL	TEST CONDITIONS		MIN	TYP	MAX	UNIT
Output Voltage	V_{OUT}		$T_J=25^\circ C$	-8.64	-9.0	-9.36	V
		$V_{IN}=-11.5V \sim -23V, I_{OUT}=5mA \sim 1A$		-8.55		-9.45	V
Dropout Voltage	V_D	$I_{OUT}=1A$	$T_J=25^\circ C$		2		V
Line Regulation	ΔV_{OUT}	$V_{IN}=-11.5V \sim -26V$	$T_J=25^\circ C$		10	180	mV
		$V_{IN}=-12V \sim -18V$	$T_J=25^\circ C$		5	90	mV
Load Regulation	ΔV_{OUT}	$I_{OUT}=5mA \sim 1A$	$T_J=25^\circ C$		12	180	mV
		$I_{OUT}=250mA \sim 750mA$	$T_J=25^\circ C$		4	90	mV
Quiescent Current	I_Q		$T_J=25^\circ C$		3	6	mA
Quiescent Current Change	ΔI_Q	$I_{OUT}=5mA \sim 1A$			0.05	0.5	mA
		$V_{IN}=-11.5V \sim -26V$			0.1	1.0	mA
Output Noise Voltage	eN	$f=10Hz \sim 100kHz$	$T_A=25^\circ C$		175		μV
Output Voltage Drift	$\Delta V_{OUT}/\Delta T$	$I_{OUT}=5mA$			-0.6		$mV/^\circ C$
Ripple Rejection	RR	$V_{IN}=-12.5V \sim -22.5V, f=120Hz$		54	60		dB
Peak Current	I_{PEAK}		$T_J=25^\circ C$		2.2		A

■ ELECTRICAL CHARACTERISTICS(Cont.)

For UTC 79D12A ($V_{IN}=-18V$)

PARAMETER	SYMBOL	TEST CONDITIONS		MIN	TYP	MAX	UNIT
Output Voltage	V_{OUT}		$T_J=25^\circ C$	-11.52	-12.0	-12.48	V
		$V_{IN}=-14.5V \sim -27V$, $I_{OUT}=5mA \sim 1A$		-11.40		-12.60	V
Dropout Voltage	V_D	$I_{OUT}=1A$	$T_J=25^\circ C$		2		V
Line Regulation	ΔV_{OUT}	$V_{IN}=-14.5V \sim -30V$	$T_J=25^\circ C$		12	240	mV
		$V_{IN}=-16V \sim -22V$	$T_J=25^\circ C$		6	120	mV
Load Regulation	ΔV_{OUT}	$I_{OUT}=5mA \sim 1A$	$T_J=25^\circ C$		12	240	mV
		$I_{OUT}=250mA \sim 750mA$	$T_J=25^\circ C$		4	120	mV
Quiescent Current	I_Q		$T_J=25^\circ C$		3	6	mA
Quiescent Current Change	ΔI_Q	$I_{OUT}=5mA \sim 1A$			0.05	0.5	mA
		$V_{IN}=-14.5V \sim -30V$			0.1	1.0	mA
Output Noise Voltage	eN	$f=10Hz \sim 100kHz$	$T_A=25^\circ C$		200		μV
Output Voltage Drift	$\Delta V_{OUT}/\Delta T$	$I_{OUT}=5mA$			-0.8		$mV/^\circ C$
Ripple Rejection	RR	$V_{IN}=-15V \sim -25V$, $f=120Hz$		54	60		dB
Peak Current	I_{PEAK}		$T_J=25^\circ C$		2.2		A

For UTC 79D15A ($V_{IN}=-23V$)

PARAMETER	SYMBOL	TEST CONDITIONS		MIN	TYP	MAX	UNIT
Output Voltage	V_{OUT}		$T_J=25^\circ C$	-14.40	-15.0	-15.60	V
		$V_{IN}=-17.5V \sim -30V$, $I_{OUT}=5mA \sim 1A$		-14.25		-15.75	V
Dropout Voltage	V_D	$I_{OUT}=1A$	$T_J=25^\circ C$		2		V
Line Regulation	ΔV_{OUT}	$V_{IN}=-17.5V \sim -30V$	$T_J=25^\circ C$		12	300	mV
		$V_{IN}=-20V \sim -26V$	$T_J=25^\circ C$		6	150	mV
Load Regulation	ΔV_{OUT}	$I_{OUT}=5mA \sim 1A$	$T_J=25^\circ C$		12	300	mV
		$I_{OUT}=250mA \sim 750mA$	$T_J=25^\circ C$		4	150	mV
Quiescent Current	I_Q		$T_J=25^\circ C$		3	6	mA
Quiescent Current Change	ΔI_Q	$I_{OUT}=5mA \sim 1A$			0.05	0.5	mA
		$V_{IN}=-17.5V \sim -30.5V$			0.1	1.0	mA
Output Noise Voltage	eN	$f=10Hz \sim 100kHz$	$T_A=25^\circ C$		250		μV
Output Voltage Drift	$\Delta V_{OUT}/\Delta T$	$I_{OUT}=5mA$			-0.9		$mV/^\circ C$
Ripple Rejection	RR	$V_{IN}=-18.5V \sim -28.5V$, $f=120Hz$		54	60		dB
Peak Current	I_{PEAK}		$T_J=25^\circ C$		2.2		A

■ ELECTRICAL CHARACTERISTICS(Cont.)

For UTC 79D18A ($V_{IN}=-27V$)

PARAMETER	SYMBOL	TEST CONDITIONS		MIN	TYP	MAX	UNIT
Output Voltage	V_{OUT}		$T_J=25^\circ C$	-17.28	-18.0	-18.72	V
		$V_{IN}=-21V\sim-33V$, $I_{OUT}=5mA\sim1A$		-17.10		-18.90	V
Dropout Voltage	V_D	$I_{OUT}=1A$	$T_J=25^\circ C$		2		V
Line Regulation	ΔV_{OUT}	$V_{IN}=-21V\sim-33V$	$T_J=25^\circ C$		15	360	mV
		$V_{IN}=-24V\sim-30V$	$T_J=25^\circ C$		8	180	mV
Load Regulation	ΔV_{OUT}	$I_{OUT}=5mA\sim1A$	$T_J=25^\circ C$		15	360	mV
		$I_{OUT}=250mA\sim750mA$	$T_J=25^\circ C$		5.0	180	mV
Quiescent Current	I_Q		$T_J=25^\circ C$		3	6	mA
Quiescent Current Change	ΔI_Q	$I_{OUT}=5mA\sim1A$			0.05	0.5	mA
		$V_{IN}=-21V\sim-32V$			0.1	1.0	mA
Output Noise Voltage	eN	$f=10Hz\sim100kHz$	$T_A=25^\circ C$		300		μV
Output Voltage Drift	$\Delta V_{OUT}/\Delta T$	$I_{OUT}=5mA$			-1		$mV/^\circ C$
Ripple Rejection	RR	$V_{IN}=-22V\sim-32V$, $f=120Hz$		54	60		dB
Peak Current	I_{PEAK}		$T_J=25^\circ C$		2.2		A

For UTC 79D24A ($V_{IN}=-33V$)

PARAMETER	SYMBOL	TEST CONDITIONS		MIN	TYP	MAX	UNIT
Output Voltage	V_{OUT}		$T_J=25^\circ C$	-23.04	-24	-24.96	V
		$V_{IN}=-27V\sim-38V$, $I_{OUT}=5mA\sim1A$		-22.80		-25.20	V
Dropout Voltage	V_D	$I_{OUT}=1.0A$	$T_J=25^\circ C$		2		V
Line Regulation	ΔV_{OUT}	$V_{IN}=-27V\sim-38V$	$T_J=25^\circ C$		15	480	mV
		$V_{IN}=-30V\sim-36V$	$T_J=25^\circ C$		8	240	mV
Load Regulation	ΔV_{OUT}	$I_{OUT}=5mA\sim1A$	$T_J=25^\circ C$		15	480	mV
		$I_{OUT}=250mA\sim750mA$	$T_J=25^\circ C$		5.0	240	mV
Quiescent Current	I_Q		$T_J=25^\circ C$		3	6	mA
Quiescent Current Change	ΔI_Q	$I_{OUT}=5mA\sim1A$			0.05	0.5	mA
		$V_{IN}=-27V\sim-38V$			0.1	1.0	mA
Output Noise Voltage	eN	$f=10Hz\sim100kHz$	$T_A=25^\circ C$		400		μV
Output Voltage Drift	$\Delta V_{OUT}/\Delta T$	$I_{OUT}=5mA$			-1		$mV/^\circ C$
Ripple Rejection	RR	$V_{IN}=-28V\sim-38V$, $f=120Hz$		54	60		dB
Peak Current	I_{PEAK}		$T_J=25^\circ C$		2.2		A

Note: 1. Thermal resistance test board.

APPLICATION CIRCUITS

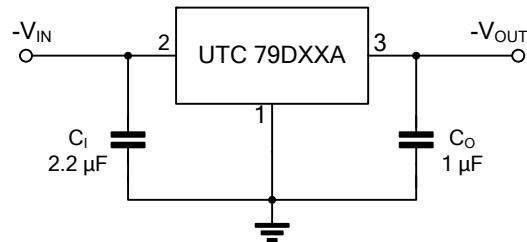


Fig.1 Fixed output regulator








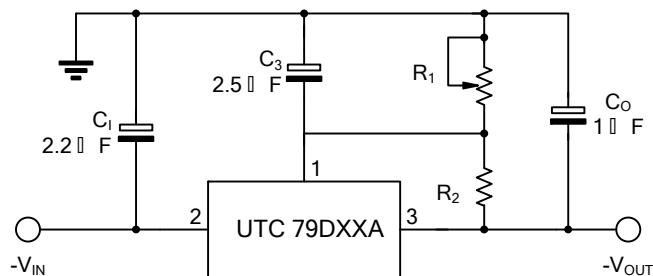


Fig.2 Circuit for increasing output voltage

■ TYPICAL CHARACTERISTICS

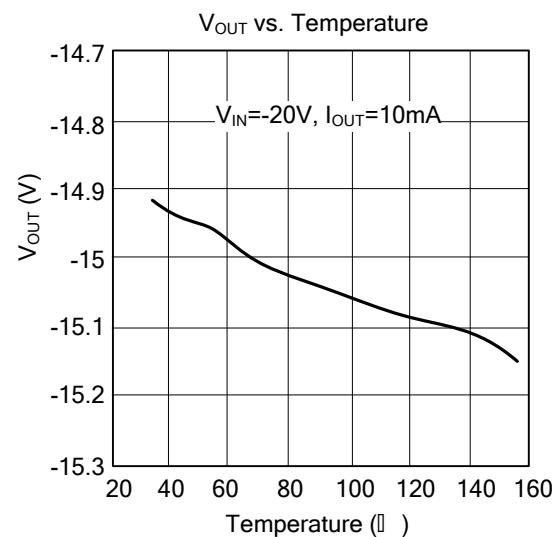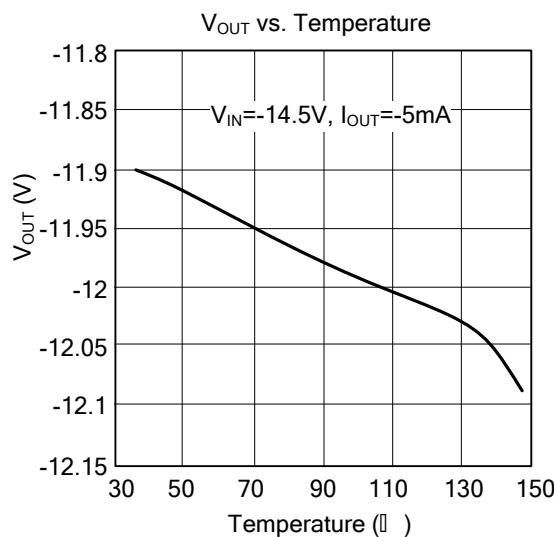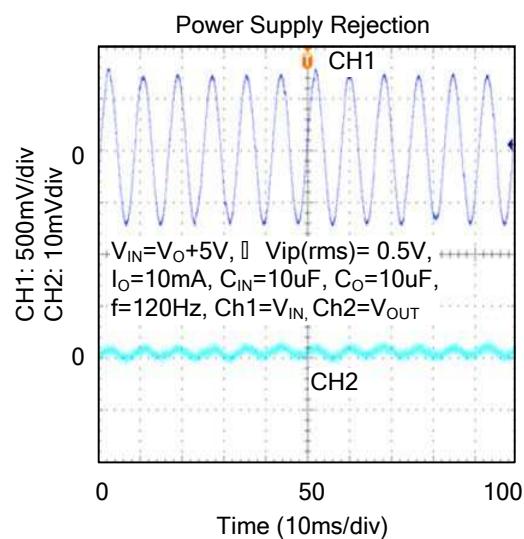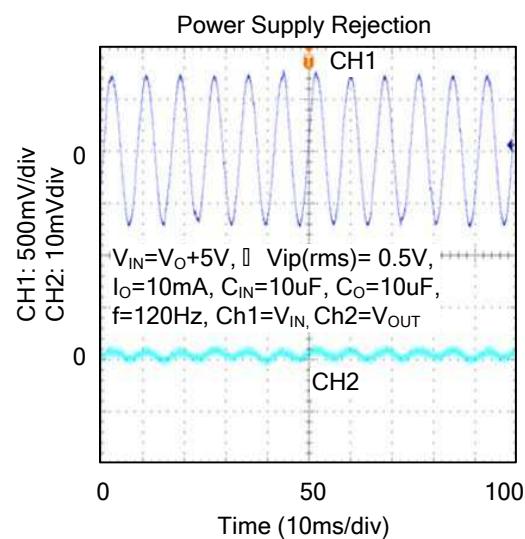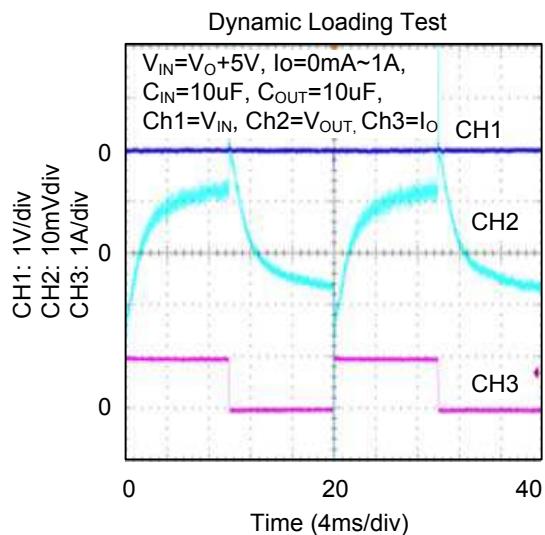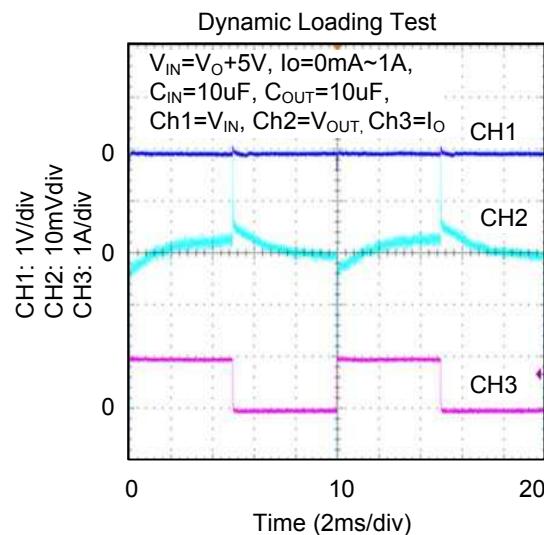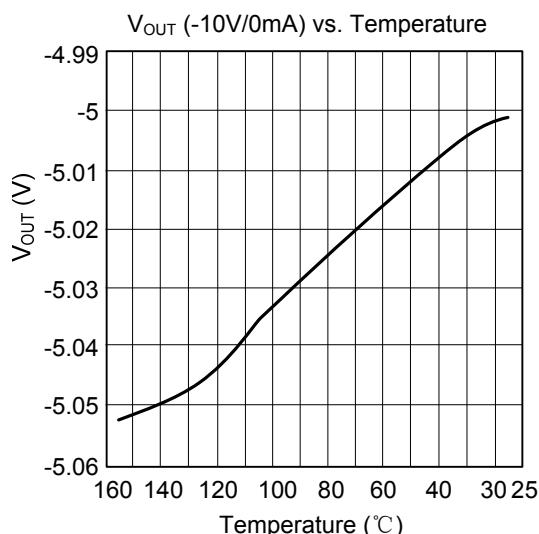

■ TYPICAL CHARACTERISTICS

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Linear Voltage Regulators](#) category:

Click to view products by [Unisonic manufacturer:](#)

Other Similar products are found below :

[LV56831P-E](#) [LV5684PVD-XH](#) [MCDTSA6-2R](#) [L4953G](#) [L7815ACV-DG](#) [PQ3DZ53U](#) [LV56801P-E](#) [TCR3DF13,LM\(CT](#)
[TCR3DF39,LM\(CT](#) [TLE42794G](#) [L78L05CZ/1SX](#) [L78LR05DL-MA-E](#) [L78MR05-E](#) [033150D](#) [033151B](#) [090756R](#) [636416C](#)
[NCV78M15BDTG](#) [702482B](#) [714954EB](#) [TLE42794GM](#) [TLE42994GM](#) [ZMR500QFTA](#) [BA033LBSG2-TR](#) [NCV78M05ABDTRKG](#)
[NCV78M08BDTRKG](#) [NCP7808TG](#) [NCV571SN12T1G](#) [LV5680P-E](#) [CAJ24C256YI-GT3](#) [L78M15CV-DG](#) [L9474N](#)
[TLS202B1MBV33HTSA1](#) [L79M05T-E](#) [NCP571SN09T1G](#) [MAX15006AASA/V+](#) [MIC5283-5.0YML-T5](#) [L4969URTR-E](#) [L78LR05D-MA-E](#)
[NCV7808BDTRKG](#) [L9466N](#) [NCP7805ETG](#) [SC7812CTG](#) [NCV7809BTG](#) [NCV571SN09T1G](#) [NCV317MBTG](#) [MC78M15CDTT5G](#)
[MC78M12CDTT5G](#) [L9468N](#) [LT1054IS8#TRPBF](#)