



LD1117/A

LINEAR INTEGRATED CIRCUIT


LOW DROP FIXED AND ADJUSTABLE POSITIVE VOLTAGE REGULATORS

DESCRIPTION

The UTC **LD1117/A** is a low dropout, 3-terminal positive voltage regulator designed to provide output current up to 800mA/1A, There are adjustable version ($V_{REF}=1.25V$) and various fixed versions.

FEATURES

- * Low dropout voltage
- * Suitable for SCSI-2 active termination if V_{OUT} set to 2.85V
- * Output current up to 0.8A for 1117 and 1.0A for 1117A
- * Built-in current limit and over temperature protection
- * Low current consumption
- * Support MLCC

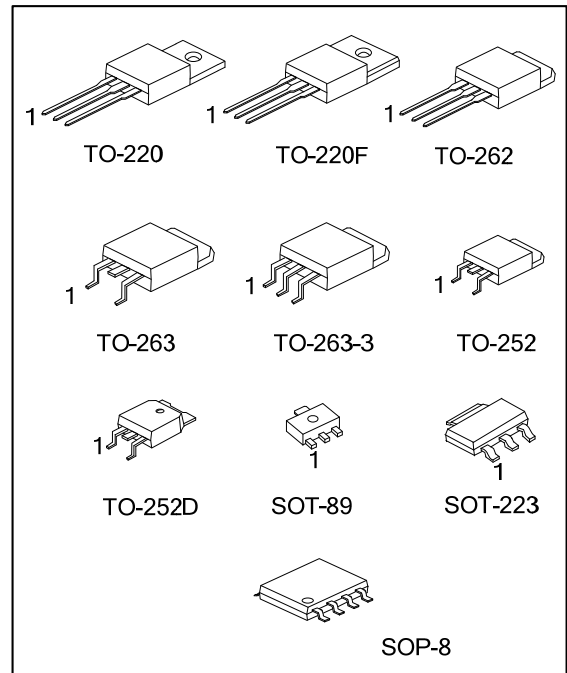

ORDERING INFORMATION

| Ordering Number | | Package | ② Pin Assignment | | | ③ Packing |
|---------------------|---------------------|----------|------------------|---|---|-------------------------|
| Lead Free | Halogen Free | | Pin Code | 1 | 2 | |
| LD1117①L-xx-AA3-②-③ | LD1117①G-xx-AA3-②-③ | SOT-223 | A | G | O | R: Tape Reel T: Tube |
| LD1117①L-xx-AB3-②-③ | LD1117①G-xx-AB3-②-③ | SOT-89 | B | O | G | |
| LD1117①L-xx-TA3-②-③ | LD1117①G-xx-TA3-②-③ | TO-220 | C | G | I | |
| LD1117①L-xx-TF3-②-③ | LD1117①G-xx-TF3-②-③ | TO-220F | D | I | G | |
| LD1117①L-xx-TN3-②-③ | LD1117①G-xx-TN3-②-③ | TO-252 | GOOlxOOx | | | |
| LD1117①L-xx-TND-②-③ | LD1117①G-xx-TND-②-③ | TO-252D | | | | |
| LD1117①L-xx-T2Q-②-③ | LD1117①G-xx-T2Q-②-③ | TO-262 | | | | |
| LD1117①L-xx-TQ2-②-③ | LD1117①G-xx-TQ2-②-③ | TO-263 | | | | |
| LD1117①L-xx-TQ3-②-③ | LD1117①G-xx-TQ3-②-③ | TO-263-3 | | | | |
| LD1117①L-xx-S08-②-③ | LD1117①G-xx-S08-②-③ | SOP-8 | | | | |

Notes: 1. ① : Current code: Blank: 800mA A: 1A
 2. Pin Assignment: I: V_{IN} O: V_{OUT} G: GND/ADJ
 3. xx: Output Voltage, Refer to Marking Information.

| | |
|--|--|
| <p>LD1117①G-xx-AA3-②-③</p> <p>(1)Packing Type (2)Pin Assignment (3)Package Type (4)Output Voltage Code (5)Green Package (6)Current Code</p> | <p>(1) R: Tape Reel, T: Tube (2) refer to Pin Assignment (3) AA3: SOT-223, AB3: SOT-89, TA3:TO-220, TF3: TO-220F, TN3: TO-252, TND: TO-252D, T2Q: TO-262, TQ2: TO-263, TQ3: TO-263-3, S08: SOP-8 (4) xx: refer to Marking Information (5) G: Halogen Free and Lead Free, L: Lead Free (6) Blank: 800mA, A: 1A</p> |
|--|--|

MARKING INFORMATION


| PACKAGE | VOLTAGE CODE | MARKING |
|--|--|--|
| SOT-89 | | <p> Date Code ← [] [] [] [] XX [] → Pin Code Current Code ← LD1117 [] [] → Voltage Code L: Lead Free G: Halogen Free </p> |
| SOT-223 | 12 : 1.2V 15 : 1.5V 18 : 1.8V 25 : 2.5V 2J : 2.85V | <p> Current Code ← [] [] [] [] LD1117 [] [] → L: Lead Free Voltage Code ← XX [] [] [] [] → G: Halogen Free Pin Code Date Code </p> |
| TO-220 TO-220F TO-252 TO-252D TO-262 TO-263 TO-263-3 | 30 : 3.0V 33 : 3.3V 36 : 3.6V 50 : 5.0V AD : ADJ | <p> Current Code ← [] [] [] [] UTC [] [] → L: Lead Free Pin Code ← LD1117 [] [] → G: Halogen Free Voltage Code ← XX [] [] [] [] → Lot Code Date Code </p> |
| SOP-8 | | <p> Current Code ← [] [] [] [] UTC [] [] → Date Code Voltage Code ← [] [] [] [] LD1117 [] [] → L: Lead Free L: Lead Free G: Halogen Free Lot Code </p> |

Note: Current code: Blank: 0.8A A: 1A

PIN CONFIGURATION of SOP-8



■ BLOCK DIAGRAM

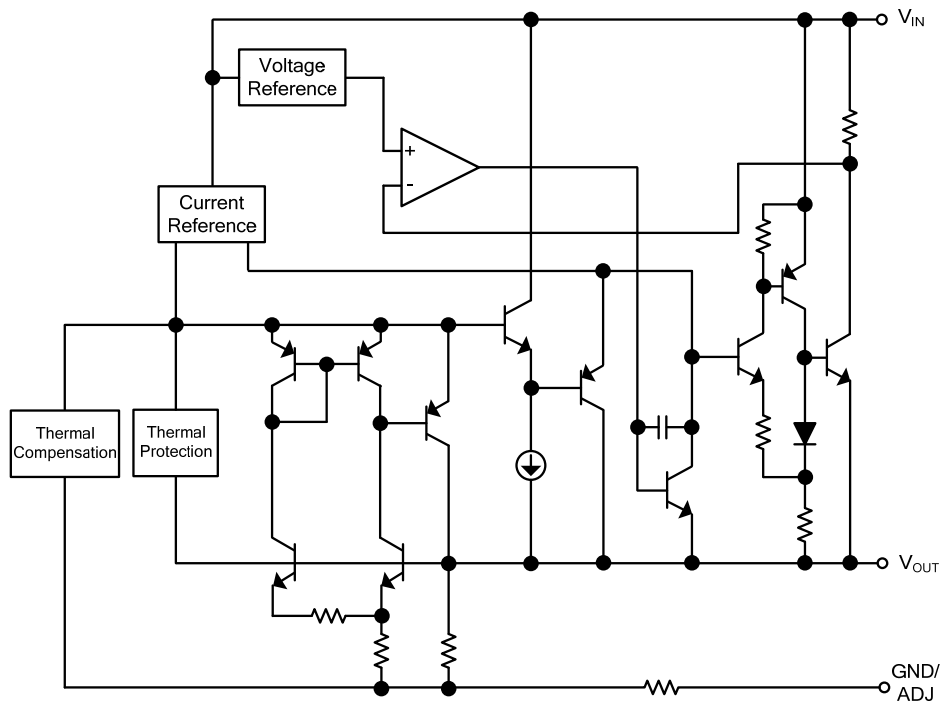

■ ABSOLUTE MAXIMUM RATINGS ($T_A=25^{\circ}\text{C}$)

| PARAMETER | SYMBOL | RATINGS | UNIT |
|--------------------------------|-----------|--------------------|--------------------|
| DC Input Voltage | V_{IN} | 18 | V |
| Power Dissipation | P_D | Internally limited | |
| Junction Temperature | T_J | +150 | $^{\circ}\text{C}$ |
| Operating Temperature (Note 2) | T_{OPR} | -20 ~ +125 | $^{\circ}\text{C}$ |
| Storage temperature | T_{STG} | -65 ~ +150 | $^{\circ}\text{C}$ |

Notes: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

2. This condition is only determined from design. It can't be 100% tested in mass production.

■ RECOMMENDED OPERATING RATINGS

| PARAMETER | SYMBOL | RATINGS | UNIT |
|--------------------------------|----------|------------|--------------------|
| Input Voltage | V_{IN} | 15 | V |
| Operating Junction Temperature | T_J | -20 ~ +125 | $^{\circ}\text{C}$ |

■ THERMAL DATA

| PARAMETER | | SYMBOL | RATINGS | UNIT |
|---------------------|----------------|---------------|---------|----------------------|
| Junction to Ambient | SOT-223 | θ_{JA} | 165 | $^{\circ}\text{C/W}$ |
| | SOT-89 | | 180 | $^{\circ}\text{C/W}$ |
| | SOP-8 | | 150 | $^{\circ}\text{C/W}$ |
| | TO-252/TO-252D | | 112 | $^{\circ}\text{C/W}$ |
| | TO-220 | | 54 | $^{\circ}\text{C/W}$ |
| | TO-262/TO-263 | | 64 | $^{\circ}\text{C/W}$ |
| Junction to Case | SOT-223 | θ_{JC} | 15 | $^{\circ}\text{C/W}$ |
| | SOT-89 | | 50 | $^{\circ}\text{C/W}$ |
| | SOP-8 | | 20 | $^{\circ}\text{C/W}$ |
| | TO-252/TO-252D | | 12 | $^{\circ}\text{C/W}$ |
| | TO-220/TO-262 | | 4 | $^{\circ}\text{C/W}$ |
| | TO-263 | | | |

■ ELECTRICAL CHARACTERISTICS

($T_A=25^\circ\text{C}$, refer to the test circuits, $T_J=0 \sim 125^\circ\text{C}$, $C_O=10\mu\text{F}$ unless otherwise specified)

For LD1117/A-1.2

| PARAMETER | SYMBOL | TEST CONDITIONS | MIN. | TYP. | MAX. | UNIT |
|--------------------------|------------------|---|---------|-------|-------|---------------|
| Output Voltage | V_{OUT} | $V_{IN}=3.2\text{V}$, $I_{OUT}=10\text{mA}$, $T_J=25^\circ\text{C}$ | 1.176 | 1.200 | 1.224 | V |
| Output Voltage | V_{OUT} | $V_{IN}=2.7$ to 8V LD1117 : $I_{OUT}=10\sim 800\text{mA}$ LD1117A : $I_{OUT}=10\sim 1000\text{mA}$ | 1.176 | 1.200 | 1.224 | V |
| Line Regulation | ΔV_{OUT} | $V_{IN}=2.7$ to 8V, $I_{OUT}=10\text{mA}$ | | 1 | 6 | mV |
| Load Regulation | ΔV_{OUT} | $V_{IN}=2.7\text{V}$ LD1117 : $I_{OUT}=10\sim 800\text{mA}$ LD1117A : $I_{OUT}=10\sim 1000\text{mA}$ | | 1 | 10 | mV |
| Temperature stability | ΔV_{OUT} | | | 0.5 | | % |
| Long Term Stability | ΔV_{OUT} | 1000 hrs, $T_J=125^\circ\text{C}$ | | 0.3 | | % |
| Operating Input Voltage | V_{IN} | $I_{OUT}=100\text{mA}$ | | | 15 | V |
| Quiescent Current | I_Q | $V_{IN}\leq 10\text{V}$ | | 5 | 10 | mA |
| Current Limit | I_{LIMIT} | $V_{IN}=6.2\text{V}$, $T_J=25^\circ\text{C}$ | LD1117 | 800 | | mA |
| | | | LD1117A | 1000 | | |
| Minimum Load Current | $I_{O(MIN)}$ | $V_{IN}=15\text{V}$ | | 2 | 5 | mA |
| Output Noise Voltage | e_N | $B=10\text{Hz}$ to 10KHz, $T_J=25^\circ\text{C}$ | | 100 | | μV |
| Supply Voltage Rejection | SVR | $I_{OUT}=40\text{mA}$, $f=120\text{Hz}$, $T_J=25^\circ\text{C}$, $V_{IN}=4.2\text{V}$, $V_{RIPPLE}=1\text{V}_{PP}$ | 60 | 75 | | dB |
| Dropout Voltage | V_D | $I_{OUT}=100\text{mA}$ | | 1.00 | 1.10 | V |
| | | $I_{OUT}=500\text{mA}$ | | 1.15 | 1.25 | |
| | | $I_{OUT}=800\text{mA}$ | | 1.20 | 1.30 | |
| | | $I_{OUT}=1\text{A}$ | | 1.20 | 1.30 | |
| Thermal Regulation | | $T_A=25^\circ\text{C}$, 30ms Pulse | | 0.01 | 0.10 | %/W |

For LD1117/A-1.5

| PARAMETER | SYMBOL | TEST CONDITIONS | MIN. | TYP. | MAX. | UNIT |
|--------------------------|------------------|---|---------|-------|-------|---------------|
| Output Voltage | V_{OUT} | $V_{IN}=3.5\text{V}$, $I_{OUT}=10\text{mA}$, $T_J=25^\circ\text{C}$ | 1.470 | 1.500 | 1.530 | V |
| Output Voltage | V_{OUT} | $V_{IN}=3$ to 8V LD1117 : $I_{OUT}=0\sim 800\text{mA}$ LD1117A : $I_{OUT}=0\sim 1000\text{mA}$ | 1.470 | 1.500 | 1.530 | V |
| Line Regulation | ΔV_{OUT} | $V_{IN}=3$ to 8V, $I_{OUT}=0\text{mA}$ | | 1 | 6 | mV |
| Load Regulation | ΔV_{OUT} | $V_{IN}=3\text{V}$ LD1117 : $I_{OUT}=0\sim 800\text{mA}$ LD1117A : $I_{OUT}=0\sim 1000\text{mA}$ | | 1 | 10 | mV |
| Temperature stability | ΔV_{OUT} | | | 0.5 | | % |
| Long Term Stability | ΔV_{OUT} | 1000 hrs, $T_J=125^\circ\text{C}$ | | 0.3 | | % |
| Operating Input Voltage | V_{IN} | $I_{OUT}=100\text{mA}$ | | | 15 | V |
| Quiescent Current | I_Q | $V_{IN}\leq 10\text{V}$ | | 5 | 10 | mA |
| Current Limit | I_{LIMIT} | $V_{IN}=6.5\text{V}$, $T_J=25^\circ\text{C}$ | LD1117 | 800 | | mA |
| | | | LD1117A | 1000 | | |
| Output Noise Voltage | e_N | $B=10\text{Hz}$ to 10KHz, $T_J=25^\circ\text{C}$ | | 100 | | μV |
| Supply Voltage Rejection | SVR | $I_{OUT}=40\text{mA}$, $f=120\text{Hz}$, $T_J=25^\circ\text{C}$, $V_{IN}=4.5\text{V}$, $V_{RIPPLE}=1\text{V}_{PP}$ | 60 | 75 | | dB |
| Dropout Voltage | V_D | $I_{OUT}=100\text{mA}$ | | 1.00 | 1.10 | V |
| | | $I_{OUT}=500\text{mA}$ | | 1.15 | 1.25 | |
| | | $I_{OUT}=800\text{mA}$ | | 1.20 | 1.30 | |
| | | $I_{OUT}=1\text{A}$ | | 1.20 | 1.30 | |
| Thermal Regulation | | $T_A=25^\circ\text{C}$, 30ms Pulse | | 0.01 | 0.10 | %/W |

■ ELECTRICAL CHARACTERISTICS(Cont.)

For LD1117/A-1.8

| PARAMETER | SYMBOL | TEST CONDITIONS | MIN. | TYP. | MAX. | UNIT |
|--------------------------|------------------|--|----------------------------------|-------|-------|---------|
| Output Voltage | V_{OUT} | $V_{IN}=3.8V, I_{OUT}=10mA, T_J=25^{\circ}C$ | 1.764 | 1.800 | 1.836 | V |
| Output Voltage | V_{OUT} | $V_{IN}=3.3$ to 8V LD1117 : $I_{OUT}=0\sim 800mA$ LD1117A : $I_{OUT}=0\sim 1000mA$ | 1.764 | 1.800 | 1.836 | V |
| Line Regulation | ΔV_{OUT} | $V_{IN}=3.3$ to 8V, $I_{OUT}=0mA$ | | 1 | 6 | mV |
| Load Regulation | ΔV_{OUT} | $V_{IN}=3.3V$ LD1117 : $I_{OUT}=0\sim 800mA$ LD1117A : $I_{OUT}=0\sim 1000mA$ | | 1 | 10 | mV |
| Temperature stability | ΔV_{OUT} | | | 0.5 | | % |
| Long Term Stability | ΔV_{OUT} | 1000 hrs, $T_J=125^{\circ}C$ | | 0.3 | | % |
| Operating Input Voltage | V_{IN} | $I_{OUT}=100mA$ | | | 15 | V |
| Quiescent Current | I_Q | $V_{IN}\leq 10V$ | | 5 | 10 | mA |
| Current Limit | I_{LIMIT} | $V_{IN}=6.8V, T_J=25^{\circ}C$ | LD1117 800 LD1117A 1000 | | | mA |
| Output Noise Voltage | e_N | $B=10Hz$ to 10KHz, $T_J=25^{\circ}C$ | | 100 | | μV |
| Supply Voltage Rejection | SVR | $I_{OUT}=40mA, f=120Hz, T_J=25^{\circ}C,$ $V_{IN}=5.5V, V_{RIPPLE}=1V_{PP}$ | 60 | 75 | | dB |
| Dropout Voltage | V_D | $I_{OUT}=100mA$ | | 1.00 | 1.10 | V |
| | | $I_{OUT}=500mA$ | | 1.15 | 1.25 | |
| | | $I_{OUT}=800mA$ | | 1.20 | 1.30 | |
| | | $I_{OUT}=1A$ | | 1.20 | 1.30 | |
| Thermal Regulation | | $T_A=25^{\circ}C, 30ms$ Pulse | | 0.01 | 0.10 | %/W |

For LD1117/A-2.5

| PARAMETER | SYMBOL | TEST CONDITIONS | MIN. | TYP. | MAX. | UNIT |
|--------------------------|------------------|---|----------------------------------|-------|-------|---------|
| Output Voltage | V_{OUT} | $V_{IN}=4.5V, I_{OUT}=10mA, T_J=25^{\circ}C$ | 2.450 | 2.500 | 2.550 | V |
| Output Voltage | V_{OUT} | $V_{IN}=3.9$ to 10V LD1117 : $I_{OUT}=0\sim 800mA$ LD1117A : $I_{OUT}=0\sim 1000mA$ | 2.450 | 2.500 | 2.550 | V |
| Line Regulation | ΔV_{OUT} | $V_{IN}=3.9$ to 10V, $I_{OUT}=0mA$ | | 1 | 6 | mV |
| Load Regulation | ΔV_{OUT} | $V_{IN}=3.9V$ LD1117 : $I_{OUT}=0\sim 800mA$ LD1117A : $I_{OUT}=0\sim 1000mA$ | | 1 | 10 | mV |
| Temperature stability | ΔV_{OUT} | | | 0.5 | | % |
| Long Term Stability | ΔV_{OUT} | 1000 hrs, $T_J=125^{\circ}C$ | | 0.3 | | % |
| Operating Input Voltage | V_{IN} | $I_{OUT}=100mA$ | | | 15 | V |
| Quiescent Current | I_Q | $V_{IN}\leq 10V$ | | 5 | 10 | mA |
| Current Limit | I_{LIMIT} | $V_{IN}=7.5V, T_J=25^{\circ}C$ | LD1117 800 LD1117A 1000 | | | mA |
| Output Noise Voltage | e_N | $B=10Hz$ to 10KHz, $T_J=25^{\circ}C$ | | 100 | | μV |
| Supply Voltage Rejection | SVR | $I_{OUT}=40mA, f=120Hz, T_J=25^{\circ}C,$ $V_{IN}=5.5V, V_{RIPPLE}=1V_{PP}$ | 60 | 75 | | dB |
| Dropout Voltage | V_D | $I_{OUT}=100mA$ | | 1.00 | 1.10 | V |
| | | $I_{OUT}=500mA$ | | 1.15 | 1.25 | |
| | | $I_{OUT}=800mA$ | | 1.20 | 1.30 | |
| | | $I_{OUT}=1A$ | | 1.20 | 1.30 | |
| Thermal Regulation | | $T_A=25^{\circ}C, 30ms$ Pulse | | 0.01 | 0.10 | %/W |

■ ELECTRICAL CHARACTERISTICS(Cont.)

For LD1117/A-2.85

| PARAMETER | SYMBOL | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|--------------------------|------------------|--|-----------------|-------|-------|---------|
| Output Voltage | V_{OUT} | $V_{IN}=4.85V, I_{OUT}=10mA, T_J=25^{\circ}C$ | 2.793 | 2.850 | 2.907 | V |
| Output Voltage | V_{OUT} | $V_{IN}=4.25$ to $10V$ LD1117 : $I_{OUT}=0\sim 800mA$ LD1117A : $I_{OUT}=0\sim 1000mA$ | 2.793 | 2.850 | 2.907 | V |
| Line Regulation | ΔV_{OUT} | $V_{IN}=4.25$ to $10V, I_{OUT}=0mA$ | | 1 | 6 | mV |
| Load Regulation | ΔV_{OUT} | $V_{IN}=4.25V$ LD1117 : $I_{OUT}=0\sim 800mA$ LD1117A : $I_{OUT}=0\sim 1000mA$ | | 1 | 10 | mV |
| Temperature stability | ΔV_{OUT} | | | 0.5 | | % |
| Long Term Stability | ΔV_{OUT} | 1000 hrs, $T_J=125^{\circ}C$ | | 0.3 | | % |
| Operating Input Voltage | V_{IN} | $I_{OUT}=100mA$ | | | 15 | V |
| Quiescent Current | I_Q | $V_{IN}\leq 10V$ | | 5 | 10 | mA |
| Current Limit | I_{LIMIT} | $V_{IN}=7.85V, T_J=25^{\circ}C$ | LD1117 | 800 | | mA |
| | | | LD1117A | 1000 | | |
| Output Noise Voltage | e_N | $B=10Hz$ to $10KHz, T_J=25^{\circ}C$ | | 100 | | μV |
| Supply Voltage Rejection | SVR | $I_{OUT}=40mA, f=120Hz, T_J=25^{\circ}C,$ $V_{IN}=5.85V, V_{RIPPLE}=1V_{PP}$ | 60 | 75 | | dB |
| Dropout Voltage | V_D | | $I_{OUT}=100mA$ | 1.00 | 1.10 | V |
| | | | $I_{OUT}=500mA$ | 1.15 | 1.25 | |
| | | | $I_{OUT}=800mA$ | 1.20 | 1.30 | |
| | | | $I_{OUT}=1A$ | 1.20 | 1.30 | |
| Thermal Regulation | | $T_A=25^{\circ}C, 30ms$ Pulse | | 0.01 | 0.10 | %/W |

For LD1117/A-3.0

| PARAMETER | SYMBOL | TEST CONDITIONS | MIN. | TYP. | MAX. | UNIT |
|--------------------------|------------------|---|-----------------|-------|-------|---------|
| Output Voltage | V_{OUT} | $V_{IN}=5V, I_{OUT}=10mA, T_J=25^{\circ}C$ | 2.940 | 3.000 | 3.060 | V |
| Output Voltage | V_{OUT} | $V_{IN}=4.5$ to $10V$ LD1117 : $I_{OUT}=0\sim 800mA$ LD1117A : $I_{OUT}=0\sim 1000mA$ | 2.940 | 3.000 | 3.060 | V |
| Line Regulation | ΔV_{OUT} | $V_{IN}=4.5$ to $12V, I_{OUT}=0mA$ | | 1 | 6 | mV |
| Load Regulation | ΔV_{OUT} | $V_{IN}=4.5V$ LD1117 : $I_{OUT}=0\sim 800mA$ LD1117A : $I_{OUT}=0\sim 1000mA$ | | 1 | 10 | mV |
| Temperature stability | ΔV_{OUT} | | | 0.5 | | % |
| Long Term Stability | ΔV_{OUT} | 1000 hrs, $T_J=125^{\circ}C$ | | 0.3 | | % |
| Operating Input Voltage | V_{IN} | $I_{OUT}=100mA$ | | | 15 | V |
| Quiescent Current | I_Q | $V_{IN}\leq 15V$ | | 5 | 10 | mA |
| Current Limit | I_{LIMIT} | $V_{IN}=8V, T_J=25^{\circ}C$ | LD1117 | 800 | | mA |
| | | | LD1117A | 1000 | | |
| Output Noise Voltage | e_N | $B=10Hz$ to $10KHz, T_J=25^{\circ}C$ | | 100 | | μV |
| Supply Voltage Rejection | SVR | $I_{OUT}=40mA, f=120Hz, T_J=25^{\circ}C,$ $V_{IN}=6V, V_{RIPPLE}=1V_{PP}$ | 60 | 75 | | dB |
| Dropout Voltage | V_D | | $I_{OUT}=100mA$ | 1.00 | 1.10 | V |
| | | | $I_{OUT}=500mA$ | 1.15 | 1.25 | |
| | | | $I_{OUT}=800mA$ | 1.20 | 1.30 | |
| | | | $I_{OUT}=1A$ | 1.20 | 1.30 | |
| Thermal Regulation | | $T_A=25^{\circ}C, 30ms$ Pulse | | 0.01 | 0.10 | %/W |

■ ELECTRICAL CHARACTERISTICS(Cont.)

For LD1117/A-3.3

| PARAMETER | SYMBOL | TEST CONDITIONS | MIN. | TYP. | MAX. | UNIT |
|--------------------------|------------------|--|-----------------|-------|-------|---------|
| Output Voltage | V_{OUT} | $V_{IN}=5.3V, I_{OUT}=10mA, T_J=25^{\circ}C$ | 3.234 | 3.300 | 3.366 | V |
| Output Voltage | V_{OUT} | $V_{IN}=4.75$ to 10V LD1117 : $I_{OUT}=0\sim 800mA$ LD1117A : $I_{OUT}=0\sim 1000mA$ | 3.234 | 3.300 | 3.366 | V |
| Line Regulation | ΔV_{OUT} | $V_{IN}=4.75$ to 15V, $I_{OUT}=0mA$ | | 1 | 6 | mV |
| Load Regulation | ΔV_{OUT} | $V_{IN}=4.75V$ LD1117 : $I_{OUT}=0\sim 800mA$ LD1117A : $I_{OUT}=0\sim 1000mA$ | | 1 | 10 | mV |
| Temperature stability | ΔV_{OUT} | | | 0.5 | | % |
| Long Term Stability | ΔV_{OUT} | 1000 hrs, $T_J=125^{\circ}C$ | | 0.3 | | % |
| Operating Input Voltage | V_{IN} | $I_{OUT}=100mA$ | | | 15 | V |
| Quiescent Current | I_Q | $V_{IN}\leq 15V$ | | 5 | 10 | mA |
| Current Limit | I_{LIMIT} | $V_{IN}=8.3V, T_J=25^{\circ}C$ | LD1117 | 800 | | mA |
| | | | LD1117A | 1000 | | |
| Output Noise Voltage | e_N | B=10Hz to 10KHz, $T_J=25^{\circ}C$ | | 100 | | μV |
| Supply Voltage Rejection | SVR | $I_{OUT}=40mA, f=120Hz, T_J=25^{\circ}C,$ $V_{IN}=6.3V, V_{RIPPLE}=1V_{PP}$ | 60 | 75 | | dB |
| Dropout Voltage | V_D | | $I_{OUT}=100mA$ | 1.00 | 1.10 | V |
| | | | $I_{OUT}=500mA$ | 1.15 | 1.25 | |
| | | | $I_{OUT}=800mA$ | 1.20 | 1.30 | |
| | | | $I_{OUT}=1A$ | 1.20 | 1.30 | |
| Thermal Regulation | | $T_A=25^{\circ}C, 30ms$ Pulse | | 0.01 | 0.10 | %/W |

For LD1117/A-3.6

| PARAMETER | SYMBOL | TEST CONDITIONS | MIN. | TYP. | MAX. | UNIT |
|--------------------------|------------------|---|-----------------|-------|-------|---------|
| Output Voltage | V_{OUT} | $V_{IN}=5.6V, I_{OUT}=10mA, T_J=25^{\circ}C$ | 3.528 | 3.600 | 3.672 | V |
| Output Voltage | V_{OUT} | $V_{IN}=5$ to 10V LD1117 : $I_{OUT}=0\sim 800mA$ LD1117A : $I_{OUT}=0\sim 1000mA$ | 3.528 | 3.600 | 3.672 | V |
| Line Regulation | ΔV_{OUT} | $V_{IN}=5$ to 15V, $I_{OUT}=0mA$ | | 1 | 6 | mV |
| Load Regulation | ΔV_{OUT} | $V_{IN}=5V$ LD1117 : $I_{OUT}=0\sim 800mA$ LD1117A : $I_{OUT}=0\sim 1000mA$ | | 1 | 10 | mV |
| Temperature stability | ΔV_{OUT} | | | 0.5 | | % |
| Long Term Stability | ΔV_{OUT} | 1000 hrs, $T_J=125^{\circ}C$ | | 0.3 | | % |
| Operating Input Voltage | V_{IN} | $I_{OUT}=100mA$ | | | 15 | V |
| Quiescent Current | I_Q | $V_{IN}\leq 15V$ | | 5 | 10 | mA |
| Current Limit | I_{LIMIT} | $V_{IN}=8.6V, T_J=25^{\circ}C$ | LD1117 | 800 | | mA |
| | | | LD1117A | 1000 | | |
| Output Noise Voltage | e_N | B=10Hz to 10KHz, $T_J=25^{\circ}C$ | | 100 | | μV |
| Supply Voltage Rejection | SVR | $I_{OUT}=40mA, f=120Hz, T_J=25^{\circ}C,$ $V_{IN}=6.6V, V_{RIPPLE}=1V_{PP}$ | 60 | 75 | | dB |
| Dropout Voltage | V_D | | $I_{OUT}=100mA$ | 1.00 | 1.10 | V |
| | | | $I_{OUT}=500mA$ | 1.15 | 1.25 | |
| | | | $I_{OUT}=800mA$ | 1.20 | 1.30 | |
| | | | $I_{OUT}=1A$ | 1.20 | 1.30 | |
| Thermal Regulation | | $T_A=25^{\circ}C, 30ms$ Pulse | | 0.01 | 0.10 | %/W |

■ ELECTRICAL CHARACTERISTICS(Cont.)

For LD1117/A-5.0

| PARAMETER | SYMBOL | TEST CONDITIONS | MIN. | TYP. | MAX. | UNIT |
|--------------------------|------------------|---|---------|-------|-------|---------|
| Output Voltage | V_{OUT} | $V_{IN}=7V, I_{OUT}=10mA, T_J=25^{\circ}C$ | 4.900 | 5.000 | 5.100 | V |
| Output Voltage | V_{OUT} | $V_{IN}=6.5$ to 15V LD1117 : $I_{OUT}=0\sim 800mA$ LD1117A : $I_{OUT}=0\sim 1.0A$ | 4.900 | 5.000 | 5.100 | V |
| Line Regulation | ΔV_{OUT} | $V_{IN}=6.5$ to 15V, $I_{OUT}=0mA$ | | 1 | 10 | mV |
| Load Regulation | ΔV_{OUT} | $V_{IN}=6.5V$ LD1117 : $I_{OUT}=0\sim 800mA$ LD1117A : $I_{OUT}=0\sim 1000mA$ | | 1 | 15 | mV |
| Temperature stability | ΔV_{OUT} | | | 0.5 | | % |
| Long Term Stability | ΔV_{OUT} | 1000 hrs, $T_J=125^{\circ}C$ | | 0.3 | | % |
| Operating Input Voltage | V_{IN} | $I_{OUT}=100mA$ | | | 15 | V |
| Quiescent Current | I_Q | $V_{IN}\leq 15V$ | | 5 | 10 | mA |
| Current Limit | I_{LIMIT} | $V_{IN}=10V, T_J=25^{\circ}C$ | | | | mA |
| | | | LD1117 | 800 | | |
| | | | LD1117A | 1000 | | |
| Output Noise Voltage | e_N | $B=10Hz$ to 10KHz, $T_J=25^{\circ}C$ | | 100 | | μV |
| Supply Voltage Rejection | SVR | $I_{OUT}=40mA, f=120Hz, T_J=25^{\circ}C,$ $V_{IN}=8V, V_{RIPPLE}=1V_{PP}$ | 60 | 75 | | dB |
| Dropout Voltage | V_D | $I_{OUT}=100mA$ | | 1.00 | 1.10 | V |
| | | $I_{OUT}=500mA$ | | 1.15 | 1.25 | |
| | | $I_{OUT}=800mA$ | | 1.20 | 1.30 | |
| | | $I_{OUT}=1A$ | | 1.20 | 1.30 | |
| Thermal Regulation | | $T_A=25^{\circ}C, 30ms$ Pulse | | 0.01 | 0.10 | %/W |

For LD1117/A-ADJ

| PARAMETER | SYMBOL | TEST CONDITIONS | MIN. | TYP. | MAX. | UNIT |
|-------------------------------|------------------|--|---------|-------|-------|---------|
| Reference Voltage | V_{REF} | $V_{IN}-V_{OUT}=2V, I_{OUT}=10mA, T_J=25^{\circ}C$ | 1.225 | 1.25 | 1.275 | V |
| Reference Voltage | V_{REF} | $V_{IN}-V_{OUT}=1.4$ to 10V LD1117 : $I_{OUT}=10\sim 800mA$ LD1117A : $I_{OUT}=10\sim 1000mA$ | 1.225 | 1.25 | 1.275 | V |
| Line Regulation | ΔV_{OUT} | $V_{IN}-V_{OUT}=1.5$ to 13.75V, $I_{OUT}=10mA$ | | 0.035 | 0.2 | % |
| Load Regulation | ΔV_{OUT} | $V_{IN}-V_{OUT}=3V$ LD1117 : $I_{OUT}=10\sim 800mA$ LD1117A : $I_{OUT}=10\sim 1000mA$ | | 0.1 | 0.4 | % |
| Temperature stability | ΔV_{OUT} | | | 0.50 | | % |
| Long Term Stability | ΔV_{OUT} | 1000 hrs, $T_J=125^{\circ}C$ | | 0.3 | | % |
| Operating Input Voltage | V_{IN} | | | | 15 | V |
| Adjustment Pin Current | I_{ADJ} | $V_{IN}\leq 15V$ | | 60 | 120 | μA |
| Adjustment Pin Current Change | ΔI_{ADJ} | $V_{IN}-V_{OUT}=1.4$ to 10V, LD1117 : $I_{OUT}=10\sim 800mA$ LD1117A : $I_{OUT}=10\sim 1000mA$ | | 1 | 5 | μA |
| Minimum Load Current | $I_{O(MIN)}$ | $V_{IN}=15V$ | | 2 | 5 | mA |
| Current Limit | I_{LIMIT} | $V_{IN}-V_{OUT}=5V, T_J=25^{\circ}C$ | | | | mA |
| | | | LD1117 | 800 | | |
| | | | LD1117A | 1000 | | |
| Output Noise (% V_O) | e_N | $B=10Hz$ to 10KHz, $T_J=25^{\circ}C$ | | 0.003 | | % |
| Supply Voltage Rejection | SVR | $I_{OUT}=40mA, f=120Hz, T_J=25^{\circ}C,$ $V_{IN}-V_{OUT}=3V, V_{RIPPLE}=1V_{PP}$ | 60 | 75 | | dB |
| Dropout Voltage | V_D | $I_{OUT}=100mA$ | | 1.00 | 1.10 | V |
| | | $I_{OUT}=500mA$ | | 1.15 | 1.25 | |
| | | $I_{OUT}=800mA$ | | 1.20 | 1.30 | |
| | | $I_{OUT}=1A$ | | 1.20 | 1.30 | |
| Thermal Regulation | | $T_A=25^{\circ}C, 30ms$ Pulse | | 0.01 | 0.10 | %/W |

TYPICAL APPLICATIONS



Fig.1 Tynca Application Circuit



Fig.2 Tynca Application Circuit (FOR MLCC)



Fig.3 Negative Supply

■ TYPICAL APPLICATIONS(Cont.)



Fig.4 Active Terminator for SCSI-2 BUS



Fig.5 Circuit for Increasing Output Voltage

■ APPLICATION NOTE of LD1117/A ADJUSTABLE

The LD1117/A adjustable has a reference voltage of between the OUT and ADJ/GND pins. I_{ADJ} is 60µA typ. (120µA max.) and ΔI_{ADJ} is 1µA typ. (5µA max.).

R_1 is normally fixed to 120Ω.

From figure 6 we obtain:

$$V_{OUT} = V_{REF} + R_2(I_{ADJ} + I_{R1}) = V_{REF} + R_2(I_{ADJ} + V_{REF}/R_1) = V_{REF}(1 + R_2/R_1) + R_2 \times I_{ADJ}$$

Usually R_2 value is in the range of few KΩ, so the $R_2 \times I_{ADJ}$ product could be neglected; then the above expression becomes: $V_{OUT} = V_{REF}(1 + R_2/R_1)$

For better load regulation, realize a good Kelvin connection of R_1 and R_2 is important. Particularly R_1 connection must be realized very close to OUT and ADJ/GND pin, while R_2 ground connection must be placed as near as possible to the negative Load pin. Ripple rejection can be improved by introducing a 10µF electrolytic capacitor placed in parallel to the R_2 resistor (See Fig. 8)

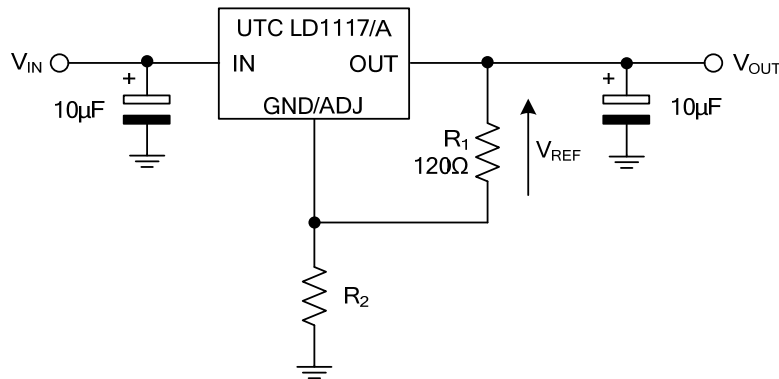


Fig.6 Adjustable Output Voltage Application Circuit

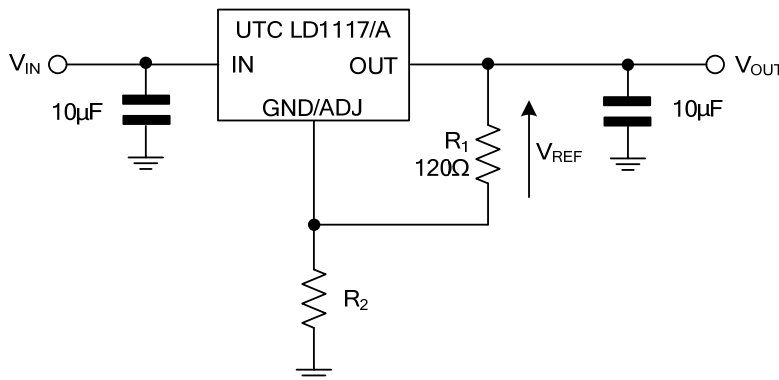


Fig.7 Adjustable Output Voltage Application Circuit (FOR MLCC)


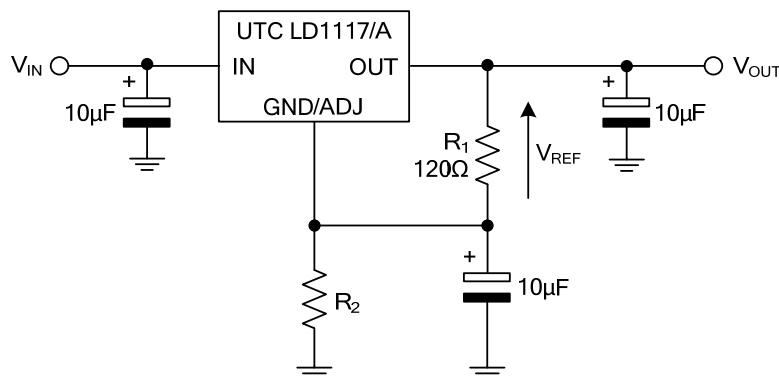



Fig.8 Adjustable Output Voltage Application with improved Ripple Rejection.

■ TYPICAL CHARACTERISTICS


Load Transient Response

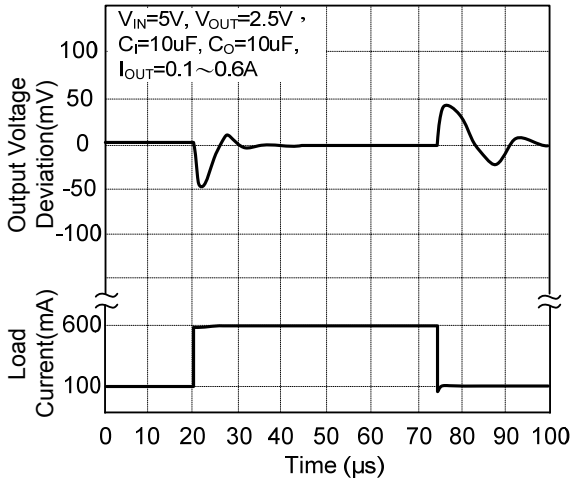


Line Transient Response

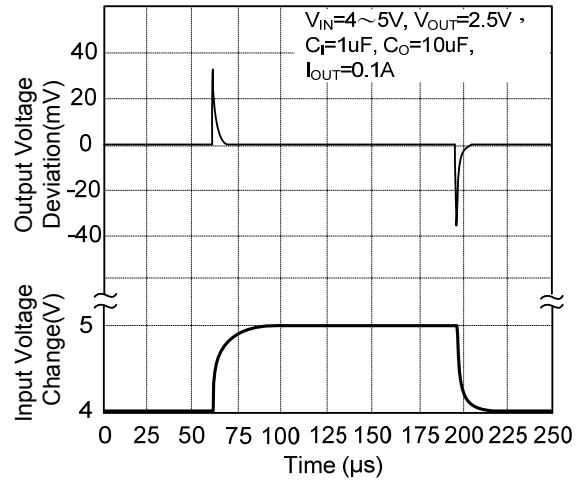


Dropout Voltage ($V_{IN}-V_{OUT}$)

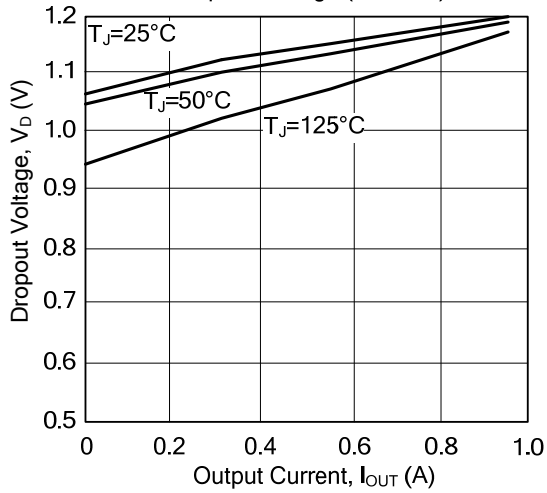


Ripple Rejection

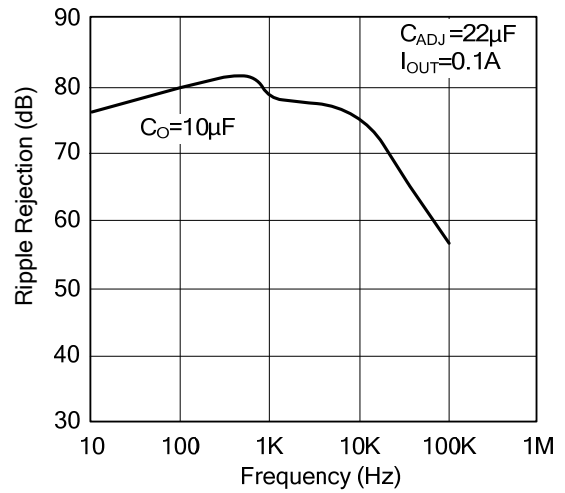






Adjust Pin Current

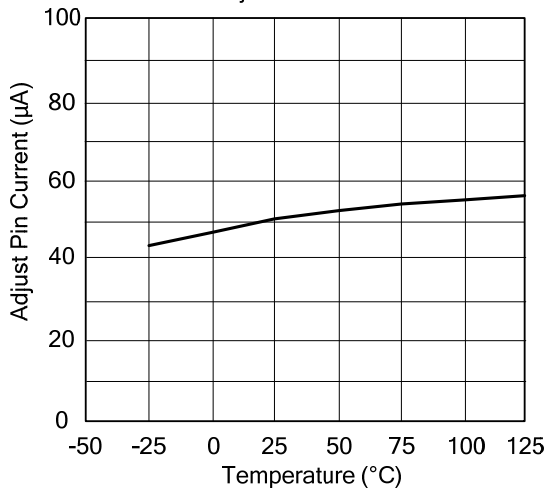



Temperature Stability

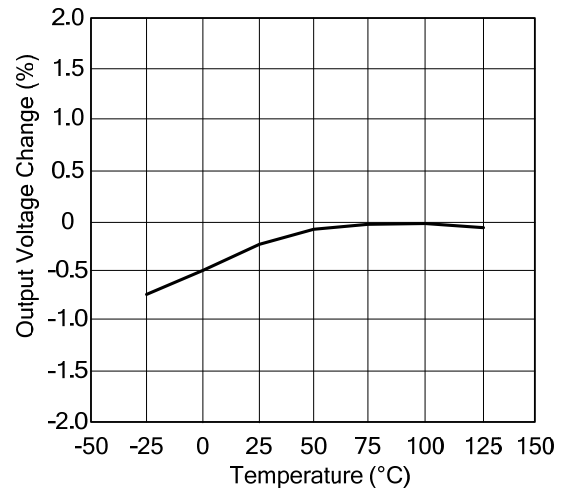

■ TYPICAL CHARACTERISTICS(Cont.)

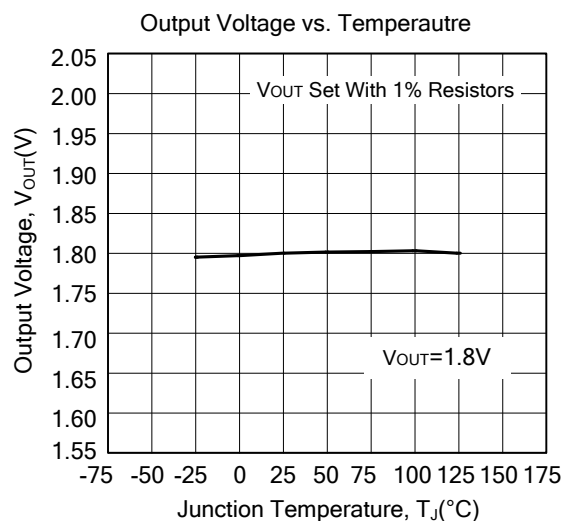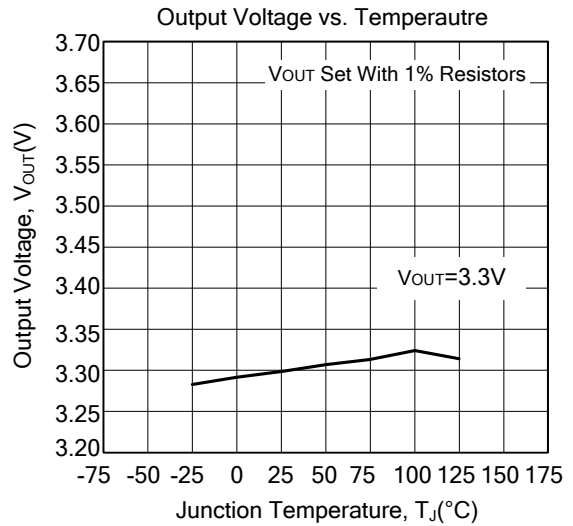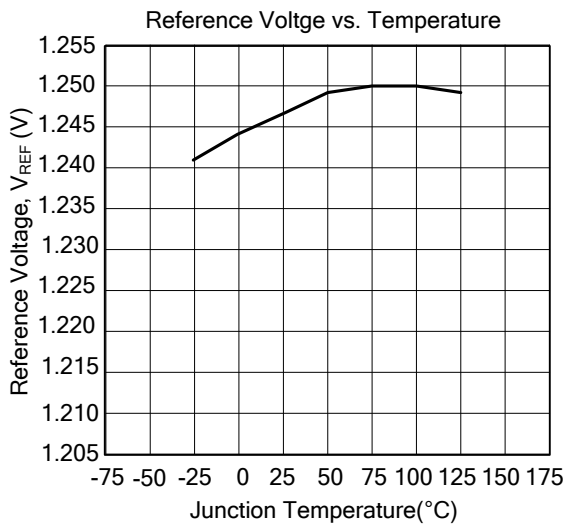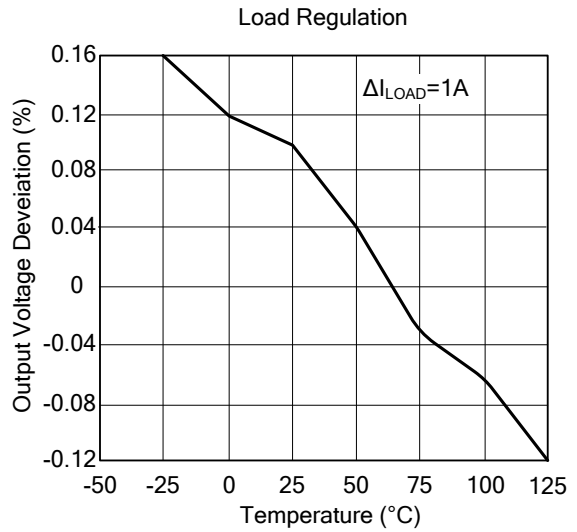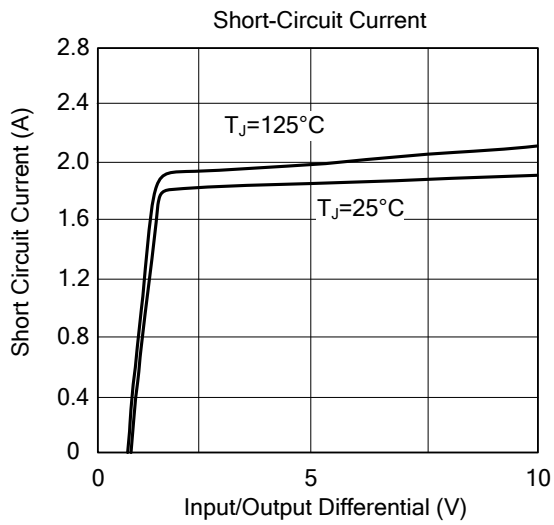

■ TYPICAL CHARACTERISTICS(Cont.)

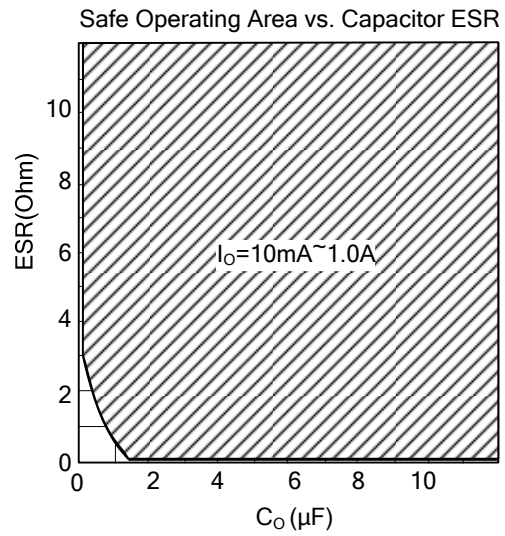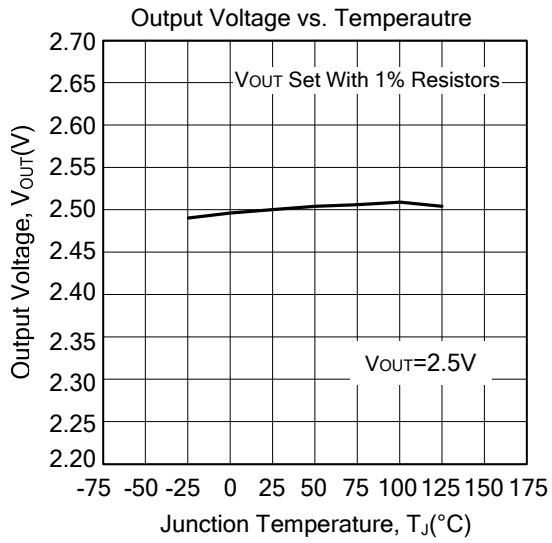

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [LDO Voltage Regulators](#) category:

Click to view products by [Unisonic](#) manufacturer:

Other Similar products are found below :

[AP7363-SP-13](#) [L79M05TL-E](#) [AP7362-HA-7](#) [PT7M8202B12TA5EX](#) [TCR3DF185,LM\(CT](#) [TCR3DF45,LM\(CT](#) [TLE4473G V52](#) [059985X](#)
[NCP4687DH15T1G](#) [701326R](#) [NCV8170AXV250T2G](#) [AP7315-25W5-7](#) [AP2111H-1.2TRG1](#) [ZLDO1117QK50TC](#) [AZ1117ID-ADJTRG1](#)
[TCR3DG12,LF](#) [MIC5514-3.3YMT-T5](#) [SCD7912BTG](#) [NCP154MX180270TAG](#) [SCD33269T-5.0G](#) [NCV8170BXV330T2G](#)
[NCV8170BMX330TCG](#) [NCV8170AMX120TCG](#) [NCP706ABMX300TAG](#) [NCP153MX330180TCG](#) [NCP114BMX075TCG](#) [MC33269T-3.5G](#)
[CAT6243-ADJCMT5T](#) [TCR3DG33,LF](#) [TCR4DG35,LF](#) [TAR5S15U\(TE85L,F\)](#) [TAR5S18U\(TE85L,F\)](#) [TCR3UG19A,LF](#) [TCR4DG105,LF](#)
[MPQ2013AGG-5-P](#) [NCV8170AMX360TCG](#) [TLE4268GSXUMA2](#) [NCP715SQ15T2G](#) [MIC5317-3.0YD5-T5](#) [NCV563SQ18T1G](#)
[NCP715MX30TBG](#) [NCV8702MX25TCG](#) [NCV8170BXV120T2G](#) [MIC5317-1.2YD5-T5](#) [NCV8170AMX150TCG](#) [NCV8170BMX150TCG](#)
[AP2213D-3.3TRG1](#) [NCV8170BMX120TCG](#) [NCV8170BMX310TCG](#) [NCV8170BMX360TCG](#)