UNISONIC TECHNOLOGIES CO., LTD

TIP41C

NPN PLANAR TRANSISTOR

NPN EXPITAXIAL PLANAR **TRANSISTOR**


DESCRIPTION


The UTC TIP41C is a NPN expitaxial planar transistor, designed for using in general purpose amplifier and switching applications.

FEATURE

* Complement to TIP42C

SYMBOL




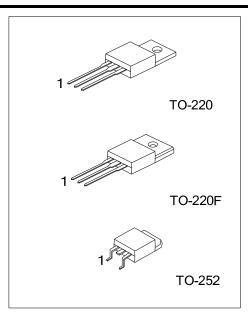


ORDERING INFORMATION

Ordering Number		Dookogo	Pin Assignment			Dooking	
Lead Free	Halogen Free	Package 1		2	3	Packing	
TIP41CL-x-TA3-T	TIP41CG-x-TA3-T	TO-220	В	С	Е	Tube	
TIP41CL-x-TF3-T	TIP41CG-x-TF3-T	TO-220F	В	С	Е	Tube	
TIP41CL-x-TN3-T	TIP41CG-x-TN3-T	TO-252	В	С	Е	Tube	
TIP41CL-x-TN3-R	TIP41CG-x-TN3-R	TO-252	В	С	E	Tape Reel	

Note: Pin Assignment: B: Base C: Collector E: Emitter

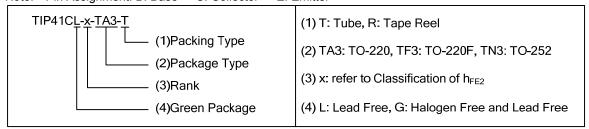

MARKING



www.unisonic.com.tw 1 of 3

■ ABSOLUTE MAXIMUM RATINGS (T_C=25°C, unless otherwise specified)

PARAMETER			SYMBOL	RATING	UNIT
Collector Base Voltage		V_{CBO}	100	V	
Collector to Emitter Voltage		V_{CEO}	100	V	
Emitter-Base Voltage		V_{EBO}	5	V	
Collector Current DC Pulse			6	Α	
		Pulse	l _C	10	Α
Base Current		I _B	2	Α	
Collector Dissipation	T _C =25°C	TO-220	P _C	65	
		TO-220F		22	W
		TO-252		25	İ
	T _A =25°C	TO-220		2	
		TO-220F		0.7	W
		TO-252		0.75	
Junction Temperature		TJ	150	°C	
Storage Temperature		T _{STG}	-65 ~ +150	°C	

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ ELECTRICAL CHARACTERISTICS (T_C=25°C, unless otherwise specified)


PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Emitter Base Breakdown Voltage	BV_{EBO}	I _E =100μA, I _C =0	5			V
Collector Base Breakdown Voltage	BV_CBO	$I_C=100\mu A, I_E=0$	100			V
Collector Emitter Sustaining Voltage (Note)	BV_CEO	I_C =30mA, I_B =0	100			V
Collector Cutoff Current	I_{CEO}	V _{CE} =60V, I _B =0			0.7	mA
Collector Cutoff Current	I _{CES}	V _{CE} =100V, V _{EB} =0			400	μΑ
Emitter Cutoff Current	I_{EBO}	V_{EB} =5 V , I_{C} =0			1	mA
Collector-Emitter Saturation Voltage (Note)	$V_{CE(SAT)}$	I _C =6A, I _B =600mA			1.5	V
Base-Emitter On Voltage (Note)	$V_{BE(ON)}$	$I_C=6A$, $V_{CE}=4V$			2.0	V
DC Current Cain (Note)	h _{FE1}	I _C =300mA, V _{CE} =4V	30			
DC Current Gain (Note)	h _{FE2}	$I_C=3A$, $V_{CE}=4V$	15		75	
Current Gain Bandwidth Product	f_{T}	V _{CE} =10V, I _C =500mA, f=1MHz	3			MHz


Note: Pulse Test: $P_W \le 300 \mu s$, Duty Cycle $\le 2\%$


■ CLASSIFICATION OF h_{FE2}

RANK	А	В	С		
RANGE	15~30	28~48	45~75		

■ TYPICAL CHARACTERISTICS

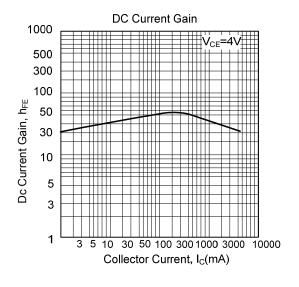

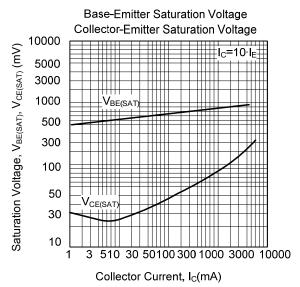

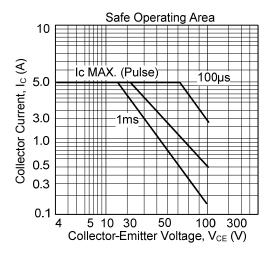

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Bipolar Transistors - BJT category:

Click to view products by Unisonic manufacturer:

Other Similar products are found below:

619691C MCH4017-TL-H MMBT-2369-TR BC546/116 BC557/116 BSW67A NJVMJD148T4G NTE123AP-10 NTE153MCP NTE16

NTE195A NTE92 C4460 2N4401-A 2N6728 2SA1419T-TD-H 2SA2126-E 2SB1204S-TL-E 2SC2712S-GR,LF 2SC5488A-TL-H

2SD2150T100R SP000011176 2N2907A 2N3904-NS 2N5769 2SC2412KT146S 2SD1816S-TL-E CPH6501-TL-E MCH4021-TL-E

MJE340 US6T6TR NJL0281DG 732314D CPH3121-TL-E CPH6021-TL-H 873787E IMZ2AT108 UMX21NTR MCH6102-TL-E

NJL0302DG 2N3583 30A02MH-TL-E NSV40301MZ4T1G NTE13 NTE26 NTE282 NTE323 NTE350 NTE81 STX83003-AP