



U74LVC125A

CMOS IC

QUADRUPLE BUS BUFFER GATE WITH 3-STATE OUTPUTS

DESCRIPTION

The **U74LVC125A** consists of four bus buffers with 3-state output controlled by enable input (\overline{OE}), when \overline{OE} is high, the output is disable.


Inputs can be driven from either 3.3V or 5V devices, so the device can be used in a mix 3.3V/5V system.

FEATURES

- * Operation Voltage Range: 1.65~3.6V
- * Low Power Dissipation
- * Input Accept Voltage to 5.5V


ORDERING INFORMATION

| Ordering Number | | Package | Packing |
|-------------------|-------------------|----------|-----------|
| Lead Free | Halogen Free | | |
| U74LVC125AL-S14-R | U74LVC125AG-S14-R | SOP-14 | Tape Reel |
| U74LVC125AL-P14-R | U74LVC125AG-P14-R | TSSOP-14 | Tape Reel |

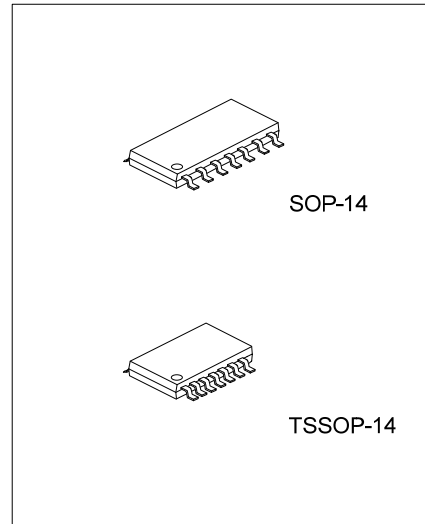


| | |
|---|--|
| <p>U74LVC125AG-S14-R</p> <p>(1) Packing Type</p> <p>(2) Package Type</p> <p>(3) Green Package</p> | <p>(1) R: Tape Reel</p> <p>(2) S14: SOP-14, P14: TSSOP-14</p> <p>(3) G: Halogen Free and Lead Free, L: Lead Free</p> |
|---|--|

MARKING

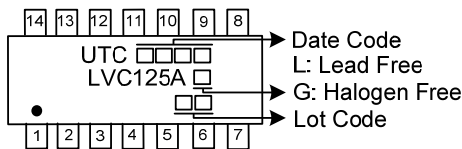


■ PIN CONFIGURATION

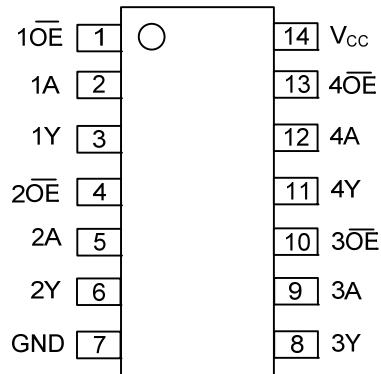

■ FUNCTION TABLE (each gate)

| INPUT | | OUTPUT |
|-----------------|---|--------|
| \overline{OE} | A | Y |
| L | L | L |
| L | H | H |
| H | X | Z |

■ LOGIC DIAGRAM (positive logic)

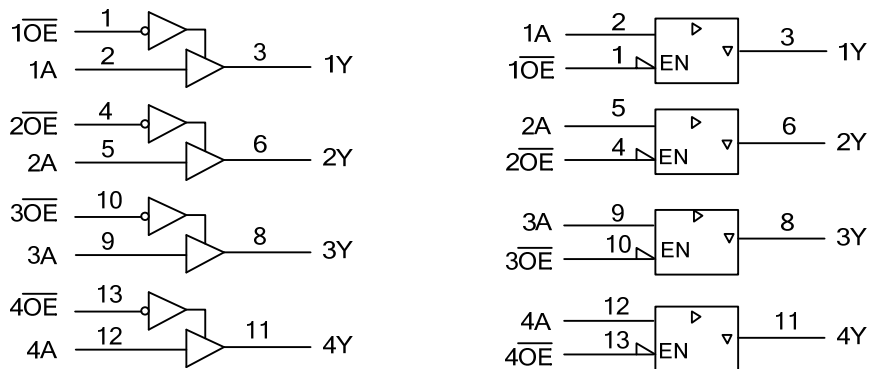

■ ABSOLUTE MAXIMUM RATINGS

| PARAMETER | SYMBOL | RATINGS | UNIT |
|------------------------------------|-----------|---------------------|-------------|
| Supply Voltage | V_{CC} | -0.5 ~ 6.5 | V |
| Input Voltage | V_{IN} | -0.5 ~ 6.5 | V |
| Output Voltage(active mode) | V_{OUT} | -0.5 ~ $V_{CC}+0.5$ | V |
| Input Clamp Current ($V_{IN}<0$) | I_{IK} | -50 | mA |
| Output Clamp Current ($V_O<0$) | I_{OK} | -50 | mA |
| Output Current | I_{OUT} | ± 50 | mA |
| V_{CC} or GND Current | I_{CC} | ± 100 | mA |
| Power Dissipation | P_D | 500 | mW |
| Storage Temperature | T_{STG} | -65 ~ +150 | $^{\circ}C$ |

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ RECOMMENDED OPERATING CONDITIONS

| PARAMETER | SYMBOL | CONDITIONS | MIN | TYP | MAX | UNIT |
|--------------------------|------------|---------------------|------|-----|----------|-------------|
| Supply Voltage | V_{CC} | Operating | 1.65 | | 3.6 | V |
| | | Data retention only | 1.5 | | | |
| Input Voltage | V_{IN} | | 0 | | 5.5 | V |
| Output Voltage | V_{OUT} | | 0 | | V_{CC} | V |
| Input Rise or Fall Times | t_R, t_F | | | | 8 | ns/V |
| Operating Temperature | T_A | | -40 | | +125 | $^{\circ}C$ |

■ STATIC CHARACTERISTICS (Unless otherwise specified)

| PARAMETER | SYMBOL | TEST CONDITIONS | TA=25°C | | | TA=-40~+125°C | | | UNIT |
|-------------------------------------|----------------------|---|-----------------|-----|-------|-----------------|-----|-------|------|
| | | | MIN | TYP | MAX | MIN | TYP | MAX | |
| High-Level Input Voltage | V _{IH} | V _{CC} =1.65V ~ 1.95V | 0.65× | | | 0.65× | | | V |
| | | V _{CC} =2.3V ~ 2.7V | 1.7 | | | 1.7 | | | V |
| | | V _{CC} =2.7V ~ 3.6V | 2.0 | | | 2 | | | V |
| Low-Level Input Voltage | V _{IL} | V _{CC} =1.65V ~ 1.95V | | | 0.35× | | | 0.35× | V |
| | | V _{CC} =2.3V ~ 2.7V | | | 0.7 | | | 0.7 | V |
| | | V _{CC} =2.7V ~ 3.6V | | | 0.8 | | | 0.8 | V |
| High-Level Output Voltage | V _{OH} | V _{CC} =1.65V ~ 3.6V, I _{OH} =-100μA | V _{CC} | | | V _{CC} | | | V |
| | | V _{CC} =1.65V, I _{OH} =-4mA | 1.29 | | | 0.9 | | | V |
| | | V _{CC} =2.3V, I _{OH} =-8mA | 1.9 | | | 1.55 | | | V |
| | | V _{CC} =2.7V, I _{OH} =-12mA | 2.2 | | | 2 | | | V |
| | | V _{CC} =3V, I _{OH} =-12mA | 2.4 | | | 2.2 | | | V |
| Low-Level Output Voltage | V _{OL} | V _{CC} =1.65V ~ 3.6V, I _{OL} =100μA | | | 0.1 | | | 0.2 | V |
| | | V _{CC} =1.65V, I _{OL} =4mA | | | 0.24 | | | 0.65 | V |
| | | V _{CC} =2.3V, I _{OL} =8mA | | | 0.3 | | | 0.9 | V |
| | | V _{CC} =2.7V, I _{OL} =12mA | | | 0.4 | | | 0.6 | V |
| | | V _{CC} =3V, I _{OL} =24mA | | | 0.55 | | | 0.75 | V |
| Input Leakage Current | I _{I(LEAK)} | V _{CC} =3.6V, V _{IN} =5.5V or GND | | | ±1 | | | ±20 | μA |
| Output OFF-State current | I _{OZ} | V _{CC} =3.6V, V _{OUT} =V _{CC} or GND | | | ±1 | | | ±20 | μA |
| Quiescent Supply Current | I _Q | V _{CC} =3.6V, V _{IN} =V _{CC} or GND I _{OUT} =0 | | | 1 | | | 40 | μA |
| Additional Quiescent Supply Current | Δ I _Q | V _{CC} =2.7V~3.6V, One input at V _{CC} - 0.6V, other inputs at V _{CC} or GND | | | 0.5 | | | 5 | mA |


■ ELECTRICAL CHARACTERISTICS (Unless otherwise specified)

| PARAMETER | SYMBOL | TEST CONDITIONS | TA=25°C | | | TA=-40°C~+125°C | | | UNIT |
|---|-------------------------------------|------------------------------|---------|-----|-----|-----------------|-----|-----|------|
| | | | MIN | TYP | MAX | MIN | TYP | MAX | |
| Propagation Delay From Input (A or B) to Output (Y) | t _{PLH} / t _{PHL} | V _{CC} = 1.8V±0.15V | 1 | 9 | 13 | 1 | | 22 | ns |
| | | V _{CC} = 2.5V±0.2V | 1 | 6 | 10 | 1 | | 13 | ns |
| | | V _{CC} = 2.7V | 1 | 6 | 9 | 1 | | 11 | ns |
| | | V _{CC} = 3.3V±0.3V | 1 | 5 | 8 | 1 | | 10 | ns |
| Output enable time from input (OE) to output (Y) | t _{PZL} / t _{PZH} | V _{CC} = 1.8V±0.15V | 1 | 9.5 | 14 | 1 | | 33 | ns |
| | | V _{CC} = 2.5V±0.2V | 1 | 5.5 | 8 | 1 | | 11 | ns |
| | | V _{CC} = 2.7V | 1 | 5 | 7 | 1 | | 9 | ns |
| | | V _{CC} = 3.3V±0.3V | 1 | 4 | 6 | 1 | | 8 | ns |
| Output enable time from input (OE) to output (Y) | t _{PLZ} / t _{PHZ} | V _{CC} = 1.8V±0.15V | 1 | 5 | 11 | 1 | | 31 | ns |
| | | V _{CC} = 2.5V±0.2V | 1 | 4 | 7 | 1 | | 10 | ns |
| | | V _{CC} = 2.7V | 1 | 3 | 6 | 1 | | 8 | ns |
| | | V _{CC} = 3.3V±0.3V | 1 | 3 | 5 | 1 | | 7 | ns |

■ OPERATING CHARACTERISTICS (T_A=25°C, unless otherwise specified)


| PARAMETER | SYMBOL | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|----------------------------------|-----------------|--|-----|------|-----|------|
| Input Capacitance | C _{IN} | V _{CC} =3.3V, V _{IN} =V _{CC} or GND | | 5 | | pF |
| Power Dissipation Capacitance | C _{PD} | V _{CC} =1.8V, f=10MHz | | 7.4 | | pF |
| | | V _{CC} =2.5V, f=10MHz | | 11.3 | | pF |
| | | V _{CC} =3.3V, f=10MHz | | 15 | | pF |

■ TEST CIRCUIT AND WAVEFORMS

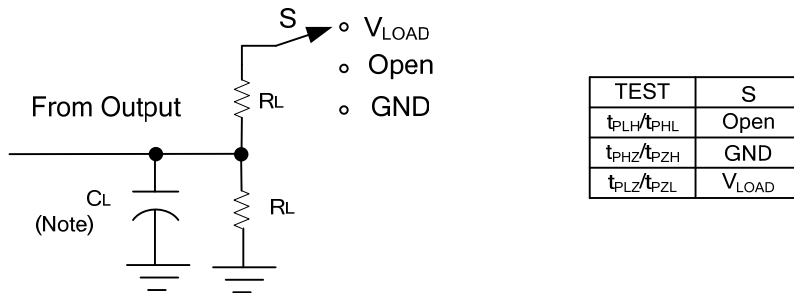

Note: C_L includes probe and jig capacitance.

| V_{CC} | V_{IN} | t_R/t_F | V_M | V_{LOAD} | C_L | R_L | V_{Δ} |
|------------------|----------|--------------|------------|-------------------|-------|--------------|--------------|
| $1.8V \pm 0.15V$ | V_{CC} | $\leq 2ns$ | $V_{CC}/2$ | $2 \times V_{CC}$ | 30pF | 1K Ω | 0.15V |
| $2.5V \pm 0.2V$ | V_{CC} | $\leq 2ns$ | $V_{CC}/2$ | $2 \times V_{CC}$ | 30pF | 500 Ω | 0.15V |
| 2.7V | 2.7V | $\leq 2.5ns$ | 1.5V | 6V | 50pF | 500 Ω | 0.3V |
| $3.3V \pm 0.3V$ | 2.7V | $\leq 2.5ns$ | 1.5V | 6V | 50pF | 500 Ω | 0.3V |

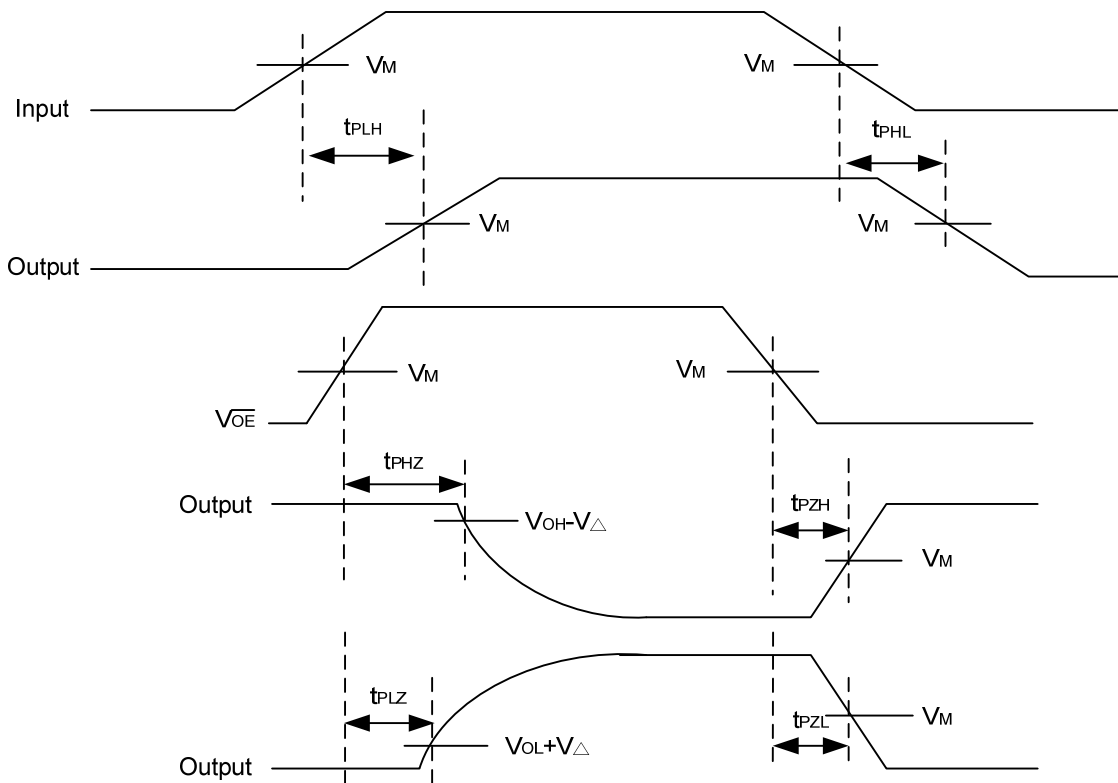

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Logic Gates](#) category:

Click to view products by [Unisonic](#) manufacturer:

Other Similar products are found below :

[74HC85N](#) [NL17SG32DFT2G](#) [CD4068BE](#) [NL17SG86DFT2G](#) [NLV14001UBDR2G](#) [NLX1G11AMUTCG](#) [NLX1G97MUTCG](#) [74LS38](#)
[74LVC1G08Z-7](#) [74LVC32ADTR2G](#) [CD4025BE](#) [MC74HCT20ADTR2G](#) [NLV17SZ00DFT2G](#) [NLV17SZ126DFT2G](#) [NLV27WZ17DFT2G](#)
[NLV74HC02ADR2G](#) [74HC32S14-13](#) [74LS133](#) [74LVC1G32Z-7](#) [74LVC1G86Z-7](#) [NLV74HC14ADR2G](#) [NLV74HC20ADR2G](#)
[NLVVHC1G09DFT1G](#) [NLX2G86MUTCG](#) [74LVC2G32RA3-7](#) [74LVC2G00HD4-7](#) [NL17SG02P5T5G](#) [74LVC2G86HK3-7](#)
[NLV7SZ97DFT2G](#) [NLVVHC1G14DFT2G](#) [NLX1G99DMUTWG](#) [NLVVHC1G00DFT2G](#) [NLV7SZ57DFT2G](#) [NLV74VHC04DTR2G](#)
[NLV27WZ00USG](#) [NLU1G86CMUTCG](#) [NLU1G08CMUTCG](#) [NL17SZ32P5T5G](#) [NL17SZ00P5T5G](#) [NL17SH02P5T5G](#) [74AUP2G00RA3-7](#)
[NLVVHC1GT00DFT2G](#) [NLV74HC02ADTR2G](#) [NLX1G332CMUTCG](#) [NLVHCT132ADTR2G](#) [NL17SG86P5T5G](#) [NL17SZ05P5T5G](#)
[NLV74VHC00DTR2G](#) [NLVVHC1G02DFT1G](#) [NLV74HC86ADR2G](#)