

# U74LVC1G17

CMOS IC

## SINGLE SCHMITT-TRIGGER BUFFER

### ■ DESCRIPTION

The UTC **U74LVC1G17** is a single Schmitt-trigger buffer, it provides the function Y=A.

The device have different input threshold levels for positive-going ( $V_{T+}$ ) and negative-going( $V_{T-}$ ) signals because of the Schmitt-trigger action in the input.

This device has power-down protective circuit, preventing device destruction when it is powered down.

### ■ FEATURES



- \* Operation Voltage Range: 1.65V ~ 5.5V
- \* Low Power Current:  $I_{CC}=10\mu A$  (Max.)
- \*  $\pm 24mA$  Output Drive ( $V_{CC}=3.0V$ )
- \* Power Down Protection

### ■ ORDERING INFORMATION


| Ordering Number   |                   | Package  | Packing   |
|-------------------|-------------------|----------|-----------|
| Lead Free         | Halogen Free      |          |           |
| U74LVC1G17L-AE5-R | U74LVC1G17G-AE5-R | SOT-23-5 | Tape Reel |
| U74LVC1G17L-AF5-R | U74LVC1G17G-AF5-R | SOT-25   | Tape Reel |
| U74LVC1G17L-AL5-R | U74LVC1G17G-AL5-R | SOT-353  | Tape Reel |

|  |  |   |
|--|--|---|
| U74LVC1G17G-AF5-R<br> | (1)Packing Type<br>(2)Package Type<br>(3)Green Package | (1) R: Tape Reel<br>(2) AE5: SOT-23-5, AF5: SOT-25, AL5: SOT-353<br>(3) G: Halogen Free and Lead Free, L: Lead Free |
|--|--|---|

### ■ MARKING

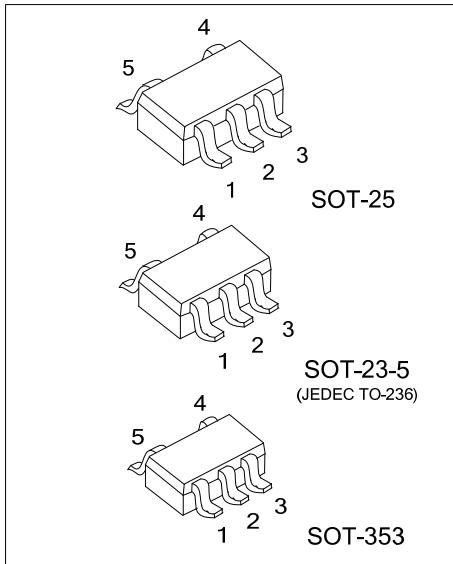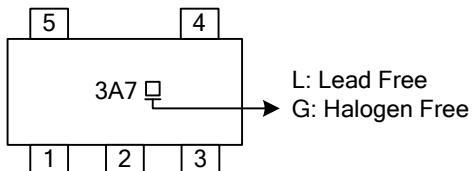


■ PIN CONFIGURATION




■ FUNCTION TABLE (each gate)

| INPUT | OUTPUT |
|-------|--------|
| A     | Y      |
| L     | L      |
| H     | H      |

■ LOGIC DIAGRAM (positive logic)



Logic symbol



IEC logic symbol

■ ABSOLUTE MAXIMUM RATING ( $T_A=25^\circ\text{C}$ , unless otherwise specified) (Note 2)

| PARAMETER                          | SYMBOL    | TEST CONDITIONS                 | RATINGS             | UNIT             |
|------------------------------------|-----------|---------------------------------|---------------------|------------------|
| Supply Voltage                     | $V_{CC}$  |                                 | -0.5 ~ 6.5          | V                |
| Input Voltage                      | $V_{IN}$  |                                 | -0.5 ~ 6.5          | V                |
| Output Voltage                     | $V_{OUT}$ | Output in the high or low state | -0.5 ~ $V_{CC}+0.5$ | V                |
|                                    |           | Output in the power-off state   | -0.5 ~ 6.5          | V                |
| Continuous $V_{CC}$ or GND Current | $I_{CC}$  |                                 | $\pm 100$           | mA               |
| Continuous Output Current          | $I_{OUT}$ |                                 | $\pm 50$            | mA               |
| Input Clamp Current                | $I_{IK}$  | $V_{IN}<0$                      | -50                 | mA               |
| Output Clamp Current               | $I_{OK}$  | $V_{OUT}<0$                     | -50                 | mA               |
| Junction Temperature               | $T_J$     |                                 | +150                | $^\circ\text{C}$ |
| Storage Temperature Range          | $T_{STG}$ |                                 | -65 ~ +150          | $^\circ\text{C}$ |

Notes: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

2. The input and output voltage ratings may be exceeded if the input and output current ratings are observed.

■ THERMAL DATA

| PARAMETER           | SYMBOL   | TEST CONDITIONS | RATINGS | UNIT               |
|---------------------|----------|-----------------|---------|--------------------|
| Junction to Ambient | SOT-23-5 | $\theta_{JA}$   | 280     | $^\circ\text{C/W}$ |
|                     | SOT-25   |                 | 230     | $^\circ\text{C/W}$ |
|                     | SOT-353  |                 | 350     | $^\circ\text{C/W}$ |
| Junction to Case    | SOT-23-5 | $\theta_{JC}$   | 100     | $^\circ\text{C/W}$ |
|                     | SOT-25   |                 | 90      | $^\circ\text{C/W}$ |
|                     | SOT-353  |                 | 120     | $^\circ\text{C/W}$ |

■ RECOMMENDED OPERATING CONDITIONS

| PARAMETER             | SYMBOL    | TEST CONDITIONS     | MIN  | TYP | MAX      | UNIT             |
|-----------------------|-----------|---------------------|------|-----|----------|------------------|
| Supply Voltage        | $V_{CC}$  | Operating           | 1.65 |     | 5.5      | V                |
|                       |           | Data retention only | 1.5  |     |          | V                |
| Input Voltage         | $V_{IN}$  |                     | 0    |     | 5.5      | V                |
| Output Voltage        | $V_{OUT}$ | High or low state   | 0    |     | $V_{CC}$ | V                |
| Operating Temperature | $T_A$     |                     | -40  |     | +125     | $^\circ\text{C}$ |

■ STATIC CHARACTERISTICS

| PARAMETER                              | SYMBOL       | TEST CONDITIONS       | MIN  | TYP | MAX  | UNIT |
|--|--------------|-----------------------|------|-----|------|------|
| Positive-going Input Threshold Voltage | $V_{T+}$     | $V_{CC}=1.65\text{V}$ | 0.76 |     | 1.16 | V    |
|  |              | $V_{CC}=2.3\text{V}$  | 1.08 |     | 1.56 |      |
|  |              | $V_{CC}=3.0\text{V}$  | 1.48 |     | 1.92 |      |
|  |              | $V_{CC}=4.5\text{V}$  | 2.16 |     | 2.74 |      |
|  |              | $V_{CC}=5.5\text{V}$  | 2.61 |     | 3.33 |      |
| Negative-going Input Threshold Voltage | $V_{T-}$     | $V_{CC}=1.65\text{V}$ | 0.35 |     | 0.62 | V    |
|  |              | $V_{CC}=2.3\text{V}$  | 0.56 |     | 0.88 |      |
|  |              | $V_{CC}=3.0\text{V}$  | 0.84 |     | 1.2  |      |
|  |              | $V_{CC}=4.5\text{V}$  | 1.41 |     | 1.97 |      |
|  |              | $V_{CC}=5.5\text{V}$  | 1.87 |     | 2.4  |      |
| Hysteresis Voltage ( $V_{T+}-V_{T-}$ ) | $\Delta V_T$ | $V_{CC}=1.65\text{V}$ | 0.36 |     | 0.64 | V    |
|  |              | $V_{CC}=2.3\text{V}$  | 0.45 |     | 0.78 |      |
|  |              | $V_{CC}=3.0\text{V}$  | 0.51 |     | 0.87 |      |
|  |              | $V_{CC}=4.5\text{V}$  | 0.58 |     | 1.04 |      |
|  |              | $V_{CC}=5.5\text{V}$  | 0.69 |     | 1.11 |      |

## ■ STATIC CHARACTERISTICS (Cont.)

| PARAMETER                           | SYMBOL        | TEST CONDITIONS   | MIN          | TYP | MAX      | UNIT    |
|-------------------------------------|---------------|---|--------------|-----|----------|---------|
| High-Level Output Voltage           | $V_{OH}$      | $V_{CC}=1.65V\sim 5.5V, I_{OH}=-100\mu A$   | $V_{CC}-0.1$ |     |          | V       |
|                                     |               | $V_{CC}=1.65V, I_{OH}=-4mA$   | 1.2          |     |          |         |
|                                     |               | $V_{CC}=2.3V, I_{OH}=-8mA$  | 1.9          |     |          |         |
|                                     |               | $V_{CC}=3.0V$ $I_{OH}=-16mA$  | 2.4          |     |          |         |
|                                     |               | $V_{CC}=3.0V$ $I_{OH}=-24mA$  | 2.3          |     |          |         |
| Low-Level Output Voltage            | $V_{OL}$      | $V_{CC}=4.5V, I_{OH}=-32mA$   | 3.8          |     |          | V       |
|                                     |               | $V_{CC}=1.65V\sim 5.5V, I_{OL}=100\mu A$  |              |     | 0.1      |         |
|                                     |               | $V_{CC}=1.65V, I_{OL}=4mA$  |              |     | 0.45     |         |
|                                     |               | $V_{CC}=2.3V, I_{OL}=8mA$   |              |     | 0.3      |         |
|                                     |               | $V_{CC}=3.0V$ $I_{OL}=16mA$   |              |     | 0.4      |         |
| Input Leakage Current               | $I_{I(LEAK)}$ | $V_{CC}=3.0V$ $I_{OL}=24mA$   |              |     | 0.55     | $\mu A$ |
|                                     |               | $V_{CC}=4.5V, I_{OL}=32mA$  |              |     | 0.55     |         |
|                                     |               | $V_{CC}=0\sim 5.5V, V_{IN}=V_{CC}$ or GND   |              |     | $\pm 5$  |         |
|                                     |               | $V_{CC}=0V, V_{IN}$ or $V_{OUT}=5.5V$   |              |     | $\pm 10$ |         |
|                                     |               | $V_{CC}=1.65V\sim 5.5V, V_{IN}=V_{CC}$ or GND<br>$I_{OUT}=0$                        |              |     | 10       |         |
| Power OFF Leakage Current           | $I_{OFF}$     |   |              |     |          | $\mu A$ |
| Quiescent Supply Current            | $I_Q$         |   |              |     |          | $\mu A$ |
| Additional Quiescent Supply Current | $\Delta I_Q$  | $V_{CC}=3V\sim 5.5V$ , One input at $V_{CC}-0.6V$ , other inputs at $V_{CC}$ or GND |              |     | 500      | $\mu A$ |
| Input Capacitance                   | $C_{IN}$      | $V_{CC}=3.3V, V_{IN}=V_{CC}$ or GND   |              | 4.5 |          | pF      |


## ■ DYNAMIC CHARACTERISTICS

| PARAMETER                                      | SYMBOL              | TEST CONDITIONS    | MIN                   | TYP | MAX | UNIT |    |
|--|---------------------|--------------------|-----------------------|-----|-----|------|----|
| Propagation delay from input (A) to output (Y) | $t_{PLH} / t_{PHL}$ | $C_L=15pF$         | $V_{CC}=1.8\pm 0.15V$ | 2.8 |     | 13   | ns |
|  |                     |                    | $V_{CC}=2.5\pm 0.2V$  | 1.6 |     | 9.1  | ns |
|  |                     |                    | $V_{CC}=3.3\pm 0.3V$  | 1.5 |     | 8.2  | ns |
|  |                     |                    | $V_{CC}=5\pm 0.5V$    | 0.9 |     | 6.8  | ns |
|  |                     | $C_L=30$ or $50pF$ | $V_{CC}=1.8\pm 0.15V$ | 3.8 |     | 14.5 | ns |
|  |                     |                    | $V_{CC}=2.5\pm 0.2V$  | 2   |     | 11.1 | ns |
|  |                     |                    | $V_{CC}=3.3\pm 0.3V$  | 1.8 |     | 10.2 | ns |
|  |                     |                    | $V_{CC}=5\pm 0.5V$    | 1.2 |     | 8.3  | ns |

■ OPERATING CHARACTERISTICS ( $f=10MHz, T_A = 25^\circ C$ , unless otherwise specified)


| PARAMETER                     | SYMBOL   | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|-------------------------------|----------|-----------------|-----|-----|-----|------|
| Power Dissipation Capacitance | $C_{PD}$ | $V_{CC}=1.8V$   |     | 20  |     | pF   |
|                               |          | $V_{CC}=2.5V$   |     | 21  |     | pF   |
|                               |          | $V_{CC}=3.3V$   |     | 22  |     | pF   |
|                               |          | $V_{CC}=5V$     |     | 25  |     | pF   |

■ TEST CIRCUIT AND WAVEFORMS

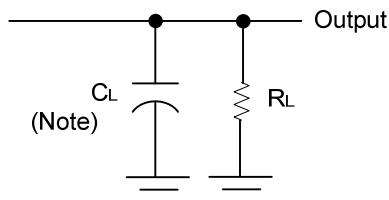

Note:  $C_L$  includes probe and jig capacitance.

| $V_{CC}$         | $V_{IN}$ | $t_R, t_F$          | $V_M$      | $C_L$         | $R_L$       |
|------------------|----------|---------------------|------------|---------------|-------------|
| $1.8V \pm 0.15V$ | $V_{CC}$ | $\leq 2\text{ns}$   | $V_{CC}/2$ | $15\text{pF}$ | $1M\Omega$  |
| $2.5V \pm 0.2V$  | $V_{CC}$ | $\leq 2\text{ns}$   | $V_{CC}/2$ | $15\text{pF}$ | $1M\Omega$  |
| $3.3V \pm 0.3V$  | $3V$     | $\leq 2.5\text{ns}$ | $1.5V$     | $15\text{pF}$ | $1M\Omega$  |
| $5V \pm 0.5V$    | $V_{CC}$ | $\leq 2.5\text{ns}$ | $V_{CC}/2$ | $15\text{pF}$ | $1M\Omega$  |
| $1.8V \pm 0.15V$ | $V_{CC}$ | $\leq 2\text{ns}$   | $V_{CC}/2$ | $30\text{pF}$ | $1K\Omega$  |
| $2.5V \pm 0.2V$  | $V_{CC}$ | $\leq 2\text{ns}$   | $V_{CC}/2$ | $30\text{pF}$ | $500\Omega$ |
| $3.3V \pm 0.3V$  | $3V$     | $\leq 2.5\text{ns}$ | $1.5V$     | $50\text{pF}$ | $500\Omega$ |
| $5V \pm 0.5V$    | $V_{CC}$ | $\leq 2.5\text{ns}$ | $V_{CC}/2$ | $50\text{pF}$ | $500\Omega$ |

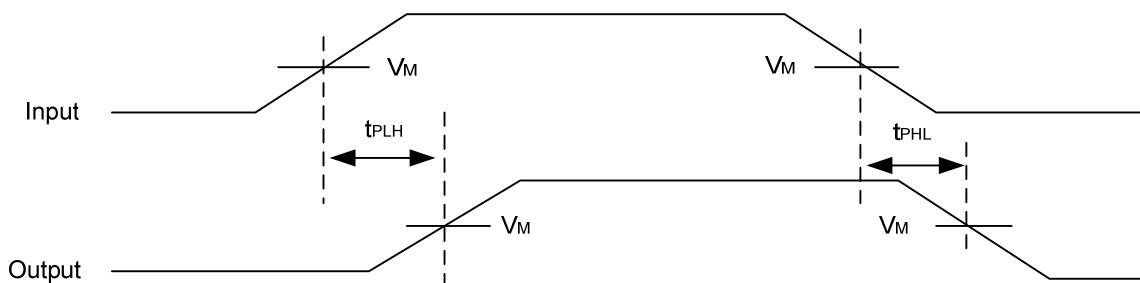

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for Logic Gates category:***

***Click to view products by Unisonic manufacturer:***

Other Similar products are found below :

[74HC85N](#) [NL17SG32DFT2G](#) [CD4068BE](#) [NL17SG86DFT2G](#) [NLV14001UBDR2G](#) [NLX1G11AMUTCG](#) [NLX1G97MUTCG](#) [74LS38](#)  
[74LVC1G08Z-7](#) [74LVC32ADTR2G](#) [CD4025BE](#) [MC74HCT20ADTR2G](#) [NLV17SZ00DFT2G](#) [NLV17SZ126DFT2G](#) [NLV27WZ17DFT2G](#)  
[NLV74HC02ADR2G](#) [74HC32S14-13](#) [74LS133](#) [74LVC1G32Z-7](#) [74LVC1G86Z-7](#) [NLV74HC14ADR2G](#) [NLV74HC20ADR2G](#)  
[NLVVHC1G09DFT1G](#) [NLX2G86MUTCG](#) [74LVC2G32RA3-7](#) [74LVC2G00HD4-7](#) [NL17SG02P5T5G](#) [74LVC2G86HK3-7](#)  
[NLV7SZ97DFT2G](#) [NLVVHC1G14DFT2G](#) [NLX1G99DMUTWG](#) [NLVVHC1G00DFT2G](#) [NLV7SZ57DFT2G](#) [NLV74VHC04DTR2G](#)  
[NLV27WZ00USG](#) [NLU1G86CMUTCG](#) [NLU1G08CMUTCG](#) [NL17SZ32P5T5G](#) [NL17SZ00P5T5G](#) [NL17SH02P5T5G](#) [74AUP2G00RA3-7](#)  
[NLVVHC1GT00DFT2G](#) [NLV74HC02ADTR2G](#) [NLX1G332CMUTCG](#) [NLVHCT132ADTR2G](#) [NL17SG86P5T5G](#) [NL17SZ05P5T5G](#)  
[NLV74VHC00DTR2G](#) [NLVVHC1G02DFT1G](#) [NLV74HC86ADR2G](#)