


KMA Series

- 7mm height
- Endurance : 1,000 hours at 105°C
- Solvent resistant type (see PRECAUTIONS AND GUIDELINES)
- RoHS Compliant





◆ SPECIFICATIONS

Items	Characteristics										
Category	-55 to +105°C										
Temperature Range	-55 to +105°C										
Rated Voltage Range	4 to 63V _{dc}										
Capacitance Tolerance	±20% (M) (at 20°C, 120Hz)										
Leakage Current	I=0.01CV or 3μA, whichever is greater. Where, I : Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V) (at 20°C after 2 minutes)										
Dissipation Factor (tanδ)	Rated voltage (V _{dc})	4V	6.3V	10V	16V	25V	35V	50V	63V		
	tanδ (Max.)	0.35	0.22	0.19	0.16	0.14	0.12	0.10	0.08	(at 20°C, 120Hz)	
Low Temperature Characteristics (Max. Impedance Ratio)	Rated voltage (V _{dc})	4V	6.3V	10V	16V	25V	35V	50V	63V		
	Z(-25°C)/Z(+20°C)	4	3	2	2	2	2	2	2		
	Z(-40°C)/Z(+20°C)	10	6	5	3	3	3	3	3	(at 120Hz)	
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage is applied for 1,000 hours at 105°C.										
	Rated voltage	4 to 16V _{dc}					25 to 63V _{dc}				
	Capacitance change	≤±25% of the initial value					≤±20% of the initial value				
	D.F. (tanδ)	≤200% of the initial specified value									
	Leakage current	≤The initial specified value									
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 105°C without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to Item 4.1 of JIS C 5101-4.										
	Rated voltage	4 to 16V _{dc}					25 to 63V _{dc}				
	Capacitance change	≤±25% of the initial value					≤±20% of the initial value				
	D.F. (tanδ)	≤200% of the initial specified value									
	Leakage current	≤The initial specified value									

◆ DIMENSIONS [mm]


- Terminal Code : E

Sleeve (PET : Brown)

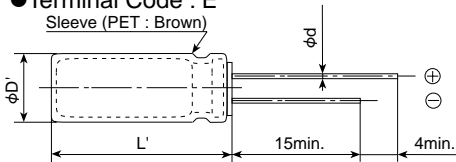

φD	4	5	6.3
φd	0.45	0.45	0.45
F	1.5	2.0	2.5
φD'	φD+0.5max.		
L'	L+1.0max.		

◆ PART NUMBERING SYSTEM

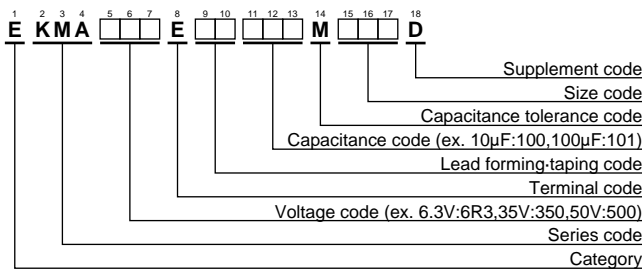

Please refer to "Product code guide (radial lead type)"

◆STANDARD RATINGS

WV (Vdc)	Cap (μF)	Case size φDXL(mm)	tanδ	Rated ripple current (mA _{rms} /105°C,120Hz)	Part No.	WV (Vdc)	Cap (μF)	Case size φDXL(mm)	tanδ	Rated ripple current (mA _{rms} /105°C,120Hz)	Part No.
4	33	4×7	0.35	26	EKMA4R0E□□330MD07D	35	4.7	4×7	0.12	20	EKMA350E□□4R7MD07D
	47	4×7	0.35	34	EKMA4R0E□□470MD07D		10	5×7	0.12	30	EKMA350E□□100ME07D
	100	5×7	0.35	61	EKMA4R0E□□101ME07D		22	6.3×7	0.12	47	EKMA350E□□220MF07D
	220	6.3×7	0.35	95	EKMA4R0E□□221MF07D		33	6.3×7	0.12	64	EKMA350E□□330MF07D
6.3	22	4×7	0.22	31	EKMA6R3E□□220MD07D	50	1.0	4×7	0.10	10	EKMA500E□□1R0MD07D
	47	5×7	0.22	47	EKMA6R3E□□470ME07D		2.2	4×7	0.10	15	EKMA500E□□2R2MD07D
10	33	5×7	0.19	43	EKMA100E□□330ME07D		3.3	4×7	0.10	18	EKMA500E□□3R3MD07D
	100	6.3×7	0.19	80	EKMA100E□□101MF07D		4.7	5×7	0.10	23	EKMA500E□□4R7ME07D
16	10	4×7	0.16	25	EKMA160E□□100MD07D	10	6.3×7	0.10	34	EKMA500E□□100MF07D	
	22	5×7	0.16	39	EKMA160E□□220ME07D	22	6.3×7	0.10	57	EKMA500E□□220MF07D	
	47	6.3×7	0.16	59	EKMA160E□□470MF07D	63	1.0	4×7	0.08	11	EKMA630E□□1R0MD07D
	100	6.3×7	0.16	97	EKMA160E□□101MF07D		2.2	4×7	0.08	17	EKMA630E□□2R2MD07D
25	33	6.3×7	0.14	53	EKMA250E□□330MF07D		3.3	5×7	0.08	21	EKMA630E□□3R3ME07D
	47	6.3×7	0.14	71	EKMA250E□□470MF07D		4.7	6.3×7	0.08	26	EKMA630E□□4R7MF07D
						10	6.3×7	0.08	43	EKMA630E□□100MF07D	

□□ : Enter the appropriate lead forming or taping code.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Aluminium Electrolytic Capacitors - Radial Leaded](#) *category:*

Click to view products by [United Chemicon](#) *manufacturer:*

Other Similar products are found below :

[LXY50VB4.7M-5X11](#) [B41041A2687M8](#) [B41041A7226M8](#) [B41044A7157M6](#) [EPA-201ELL151MM25S](#) [NCD681K10KVY5PF](#) [KM4700/16](#)
[KME50VB100M-8X11.5](#) [SG220M1CSA-0407](#) [ES5107M016AE1DA](#) [ESRL25V330](#) [ESX472M16B](#) [SZ010M1500A5S-1015](#) [227RZS050M](#)
[476CKH100MSA](#) [477CKR100M](#) [KME25VB100M-6.3X11](#) [XRL50V22](#) [052687X](#) [107CKR010M](#) [EKMA500ELL4R7ME07D](#) [NRE-](#)
[S560M16V6.3X7TBSTF](#) [RGA221M1CTA-0611G](#) [ERZA630VHN182UP54N](#) [UPL1A331MPH](#) [MAL214658821E3](#)
[SK106M016AC3KAKPLP](#) [SK107M025AE3EAKPLP](#) [B43827A1106M8](#) [B41022A5686M6](#) [EKMA160EC3101MF07D](#)
[ESMG160ETD221MF11D](#) [EKZH160ETD152MJ20S](#) [EKMA350ELL100ME07D](#) [ESMG160ETD101ME11D](#) [EGXF500ELL561ML15S](#)
[SK107M025AE3KAKPLP](#) [EKMG350ETD471MJ16S](#) [MEA562M2W--D130](#) [35YXA330MEFC10X12.5](#) [RGA221M2ABK-1320G](#)
[ERR1HM1R0D11OT](#) [ERR1CM222W20OT](#) [TM1081EMF202RB](#) [RXQ271M2EBK-1836](#) [RXW103M1CBK-1840](#) [B41896C5278M](#)
[B41851A8107M000](#) [EKMA160ETD470MF07D](#) [UHW1J102MHD6](#)