


KMR Series

- Downsized 5mm in height from current snap-ins KMQ series
- Max. 50% up ripple current than same case size of KMQ series
- Endurance with ripple current : 2,000 hours at 105°C
- Rated voltage range : 160 to 450V_{dc}, Capacitance range : 100 to 3,300μF
- For inverter control, switching power supplies
- Non solvent resistant type
- RoHS Compliant




◆ SPECIFICATIONS


Items	Characteristics			
Category	-25 to +105°C			
Temperature Range	-25 to +105°C			
Rated Voltage Range	160 to 450V _{dc}			
Capacitance Tolerance	±20% (M) (at 20°C, 120Hz)			
Leakage Current	I ≤ 3√CV Where, I : Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V) (at 20°C after 5 minutes)			
Dissipation Factor (tanδ)	Rated voltage (V _{dc})	160 to 250V	315 to 400V	420 & 450V
	tanδ (Max.)	0.15	0.15	0.20
Low Temperature Characteristics (Max. Impedance Ratio)	Rated voltage (V _{dc})	160 to 250V	315 to 400V	420 & 450V
	Z(-25°C)/Z(+20°C)	4	8	8
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20°C after subjected to DC voltage with the rated ripple current is applied for 2,000 hours at 105°C.			
	Capacitance change	≤ ±20% of the initial value		
	D.F. (tanδ)	≤ 200% of the initial specified value		
	Leakage current	≤ The initial specified value		
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 105°C without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to Item 4.1 of JIS C 5101-4.			
	Capacitance change	≤ ±15% of the initial value		
	D.F. (tanδ)	≤ 150% of the initial specified value		
	Leakage current	≤ The initial specified value		

◆ DIMENSIONS [mm]

● Terminal Code : VS (φ22 to φ35) : Standard

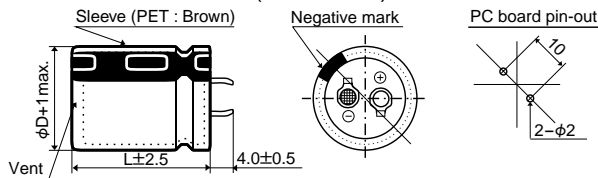


● Terminal Code : LI (φ35)

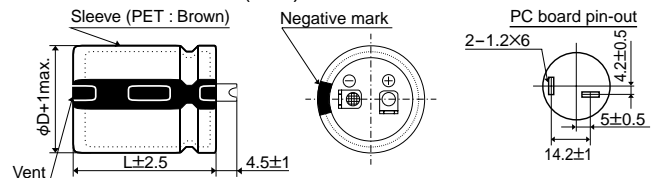

The standard design has no plastic disc.

◆ PART NUMBERING SYSTEM

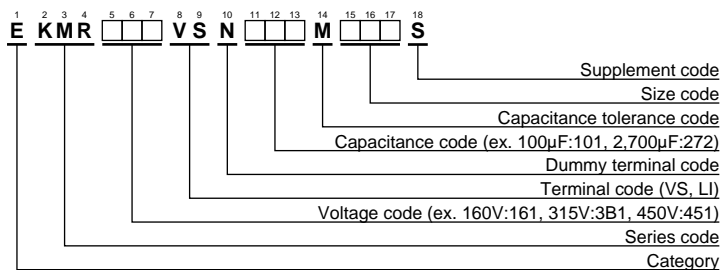

Please refer to "Product code guide (snap-in type)"



◆STANDARD RATINGS

WV (Vdc)	Cap (μF)	Case size φD×L(mm)	Rated ripple current (Arms/105°C, 120Hz)	Part No.	WV (Vdc)	Cap (μF)	Case size φD×L(mm)	Rated ripple current (Arms/105°C, 120Hz)	Part No.	
160	560	22×25	1.58	EKMR161VSN561MP25S	250	330	22×25	1.21	EKMR251VSN331MP25S	
	680	22×30	1.83	EKMR161VSN681MP30S		390	22×30	1.38	EKMR251VSN391MP30S	
	820	22×35	2.06	EKMR161VSN821MP35S		470	22×35	1.56	EKMR251VSN471MP35S	
	820	25.4×25	1.89	EKMR161VSN821MQ25S		560	22×40	1.74	EKMR251VSN561MP40S	
	1,000	22×40	2.33	EKMR161VSN102MP40S		560	25.4×30	1.61	EKMR251VSN561MQ30S	
	1,000	25.4×30	2.15	EKMR161VSN102MQ30S		560	30×25	1.42	EKMR251VSN561MR25S	
	1,000	30×25	1.90	EKMR161VSN102MR25S		680	22×45	1.97	EKMR251VSN681MP45S	
	1,200	22×45	2.61	EKMR161VSN122MP45S		680	25.4×35	1.85	EKMR251VSN681MQ35S	
	1,200	22×50	2.69	EKMR161VSN122MP50S		820	25.4×40	2.08	EKMR251VSN821MQ40S	
	1,200	25.4×35	2.45	EKMR161VSN122MQ35S		820	25.4×45	2.13	EKMR251VSN821MQ45S	
	1,500	25.4×40	2.82	EKMR161VSN152MQ40S		820	30×30	1.77	EKMR251VSN821MR30S	
	1,500	25.4×45	2.88	EKMR161VSN152MQ45S		820	35×25	1.60	EKMR251VSN821MA25S	
	1,500	30×30	2.39	EKMR161VSN152MR30S		1,000	25.4×50	2.40	EKMR251VSN102MQ50S	
	1,500	35×25	2.17	EKMR161VSN152MA25S		1,000	30×35	2.03	EKMR251VSN102MR35S	
	1,800	25.4×50	3.22	EKMR161VSN182MQ50S		1,200	30×40	2.31	EKMR251VSN122MR40S	
	1,800	30×35	2.73	EKMR161VSN182MR35S		1,200	30×45	2.38	EKMR251VSN122MR45S	
	1,800	30×40	2.82	EKMR161VSN182MR40S		1,200	35×35	2.06	EKMR251VSN122MA35S	
	1,800	35×30	2.47	EKMR161VSN182MA30S		1,500	30×50	2.73	EKMR251VSN152MR50S	
	2,200	30×45	3.23	EKMR161VSN222MR45S		1,500	35×40	2.41	EKMR251VSN152MA40S	
	2,200	35×35	2.79	EKMR161VSN222MA35S		1,800	35×45	2.72	EKMR251VSN182MA45S	
	2,700	30×50	3.66	EKMR161VSN272MR50S		2,200	35×50	3.10	EKMR251VSN222MA50S	
	2,700	35×40	3.23	EKMR161VSN272MA40S		315	180	22×25	0.91	EKMR3B1VSN181MP25S
	3,300	35×45	3.68	EKMR161VSN332MA45S			220	22×30	1.06	EKMR3B1VSN221MP30S
	180	470	22×25	1.45			EKMR181VSN471MP25S	270	22×35	1.20
560		22×30	1.66	EKMR181VSN561MP30S	270		25.4×25	1.15	EKMR3B1VSN271MQ25S	
680		22×35	1.87	EKMR181VSN681MP35S	330		22×40	1.37	EKMR3B1VSN331MP40S	
680		25.4×25	1.72	EKMR181VSN681MQ25S	330		25.4×30	1.30	EKMR3B1VSN331MQ30S	
820		22×40	2.11	EKMR181VSN821MP40S	390		22×45	1.52	EKMR3B1VSN391MP45S	
820		25.4×30	1.94	EKMR181VSN821MQ30S	390		25.4×35	1.48	EKMR3B1VSN391MQ35S	
1,000		22×45	2.38	EKMR181VSN102MP45S	390		30×25	1.39	EKMR3B1VSN391MR25S	
1,000		25.4×35	2.24	EKMR181VSN102MQ35S	470		22×50	1.72	EKMR3B1VSN471MP50S	
1,000		30×25	1.90	EKMR181VSN102MR25S	470		25.4×40	1.67	EKMR3B1VSN471MQ40S	
1,200		22×50	2.69	EKMR181VSN122MP50S	470		30×30	1.57	EKMR3B1VSN471MR30S	
1,200		25.4×40	2.52	EKMR181VSN122MQ40S	470	35×25	1.52	EKMR3B1VSN471MA25S		
1,200		30×30	2.14	EKMR181VSN122MR30S	560	25.4×45	1.86	EKMR3B1VSN561MQ45S		
1,200		35×25	1.94	EKMR181VSN122MA25S	560	30×35	1.78	EKMR3B1VSN561MP35S		
1,500		25.4×45	2.88	EKMR181VSN152MQ45S	680	25.4×50	2.10	EKMR3B1VSN681MQ50S		
1,500		25.4×50	2.94	EKMR181VSN152MQ50S	680	30×40	2.03	EKMR3B1VSN681MR40S		
1,500		30×35	2.49	EKMR181VSN152MR35S	680	35×30	1.90	EKMR3B1VSN681MA30S		
1,800		30×40	2.82	EKMR181VSN182MR40S	820	30×45	2.31	EKMR3B1VSN821MR45S		
1,800		35×30	2.47	EKMR181VSN182MA30S	820	35×35	2.13	EKMR3B1VSN821MA35S		
2,200	30×45	3.23	EKMR181VSN222MR45S	1,000	30×50	2.61	EKMR3B1VSN102MR50S			
2,200	30×50	3.31	EKMR181VSN222MR50S	1,000	35×40	2.46	EKMR3B1VSN102MA40S			
2,200	35×35	2.79	EKMR181VSN222MA35S	1,200	35×45	2.78	EKMR3B1VSN122MA45S			
2,200	35×40	2.92	EKMR181VSN222MA40S	1,200	35×50	2.86	EKMR3B1VSN122MA50S			
2,700	35×45	3.33	EKMR181VSN272MA45S	350	150	22×25	0.84	EKMR351VSN151MP25S		
200	560	22×30	1.66		EKMR201VSN561MP30S	220	22×30	1.06	EKMR351VSN221MP30S	
	560	25.4×25	1.56		EKMR201VSN561MQ25S	220	25.4×25	1.04	EKMR351VSN221MQ25S	
	680	22×35	1.87		EKMR201VSN681MP35S	270	22×35	1.20	EKMR351VSN271MP35S	
	680	25.4×30	1.77		EKMR201VSN681MQ30S	270	25.4×30	1.18	EKMR351VSN271MQ30S	
	820	22×40	2.11		EKMR201VSN821MP40S	330	22×40	1.37	EKMR351VSN331MP40S	
	820	25.4×35	2.03		EKMR201VSN821MQ35S	330	22×45	1.40	EKMR351VSN331MP45S	
	820	30×25	1.72		EKMR201VSN821MR25S	330	25.4×35	1.36	EKMR351VSN331MQ35S	
	1,000	22×50	2.45		EKMR201VSN102MP50S	330	30×25	1.28	EKMR351VSN331MR25S	
	1,000	25.4×40	2.30		EKMR201VSN102MQ40S	390	22×50	1.56	EKMR351VSN391MP50S	
	1,000	30×30	1.95		EKMR201VSN102MR30S	390	25.4×40	1.52	EKMR351VSN391MQ40S	
	1,200	25.4×45	2.58		EKMR201VSN122MQ45S	390	30×30	1.43	EKMR351VSN391MR30S	
	1,200	30×35	2.23		EKMR201VSN122MR35S	390	35×25	1.38	EKMR351VSN391MA25S	
	1,200	35×25	1.94		EKMR201VSN122MA25S	470	25.4×45	1.71	EKMR351VSN471MQ45S	
	1,500	25.4×50	2.94		EKMR201VSN152MQ50S	560	25.4×50	1.90	EKMR351VSN561MQ50S	
	1,500	30×40	2.58		EKMR201VSN152MR40S	560	30×35	1.78	EKMR351VSN561MR35S	
	1,500	35×30	2.25		EKMR201VSN152MA30S	560	30×40	1.84	EKMR351VSN561MR40S	
	1,800	30×45	2.92		EKMR201VSN182MR45S	560	35×30	1.72	EKMR351VSN561MA30S	
	1,800	35×35	2.53	EKMR201VSN182MA35S	680	30×45	2.10	EKMR351VSN681MR45S		
	2,200	30×50	3.31	EKMR201VSN222MR50S	680	35×35	1.94	EKMR351VSN681MA35S		
	2,200	35×40	2.92	EKMR201VSN222MA40S	820	30×50	2.36	EKMR351VSN821MR50S		
	2,700	35×45	3.33	EKMR201VSN272MA45S						

◆STANDARD RATINGS

WV (Vdc)	Cap (μF)	Case size φD×L(mm)	Rated ripple current (Arms/105°C, 120Hz)	Part No.	WV (Vdc)	Cap (μF)	Case size φD×L(mm)	Rated ripple current (Arms/105°C, 120Hz)	Part No.	
350	820	35×40	2.23	EKMR351VSN821MA40S	420	270	30×30	1.26	EKMR421VSN271MR30S	
	1,000	35×45	2.54	EKMR351VSN102MA45S		270	35×25	1.26	EKMR421VSN271MA25S	
	1,200	35×50	2.86	EKMR351VSN122MA50S		330	25.4×45	1.49	EKMR421VSN331MQ45S	
400	120	22×25	0.75	EKMR401VSN121MP25S		330	30×35	1.45	EKMR421VSN331MR35S	
	180	22×30	0.96	EKMR401VSN181MP30S		390	25.4×50	1.66	EKMR421VSN391MQ50S	
	180	25.4×25	0.94	EKMR401VSN181MQ25S		390	30×40	1.63	EKMR421VSN391MR40S	
	220	22×35	1.09	EKMR401VSN221MP35S		390	35×30	1.58	EKMR421VSN391MA30S	
	220	25.4×30	1.07	EKMR401VSN221MQ30S		470	30×45	1.85	EKMR421VSN471MR45S	
	270	22×40	1.24	EKMR401VSN271MP40S		470	35×35	1.77	EKMR421VSN471MA35S	
	270	22×45	1.26	EKMR401VSN271MP45S		560	30×50	2.07	EKMR421VSN561MR50S	
	270	25.4×35	1.23	EKMR401VSN271MQ35S		560	35×40	2.02	EKMR421VSN561MA40S	
	270	30×25	1.16	EKMR401VSN271MR25S		680	35×45	2.29	EKMR421VSN681MA45S	
	330	22×50	1.44	EKMR401VSN331MP50S		820	35×50	2.59	EKMR421VSN821MA50S	
	330	25.4×40	1.40	EKMR401VSN331MQ40S		450	100	22×25	0.71	EKMR451VSN101MP25S
	330	30×30	1.31	EKMR401VSN331MR30S			120	22×30	0.82	EKMR451VSN121MP30S
	330	35×25	1.27	EKMR401VSN331MA25S	150		22×35	0.94	EKMR451VSN151MP35S	
	390	25.4×45	1.55	EKMR401VSN391MQ45S	150		25.4×25	0.89	EKMR451VSN151MQ25S	
	390	30×35	1.49	EKMR401VSN391MR35S	180		22×40	1.05	EKMR451VSN181MP40S	
	470	25.4×50	1.74	EKMR401VSN471MQ50S	180		25.4×30	1.00	EKMR451VSN181MQ30S	
	470	30×40	1.69	EKMR401VSN471MR40S	220		22×45	1.19	EKMR451VSN221MP45S	
	470	35×30	1.58	EKMR401VSN471MA30S	220		25.4×35	1.16	EKMR451VSN221MQ35S	
	560	30×45	1.91	EKMR401VSN561MR45S	220		30×25	1.11	EKMR451VSN221MR25S	
	560	35×35	1.76	EKMR401VSN561MA35S	270		22×50	1.36	EKMR451VSN271MP50S	
	680	30×50	2.15	EKMR401VSN681MR50S	270		25.4×40	1.32	EKMR451VSN271MQ40S	
680	35×40	2.03	EKMR401VSN681MA40S	270	25.4×45		1.35	EKMR451VSN271MQ45S		
820	35×45	2.30	EKMR401VSN821MA45S	270	30×30		1.26	EKMR451VSN271MR30S		
820	35×50	2.37	EKMR401VSN821MA50S	270	35×25		1.26	EKMR451VSN271MA25S		
420	120	22×25	0.78	EKMR421VSN121MP25S	330		25.4×50	1.52	EKMR451VSN331MQ50S	
	150	22×30	0.91	EKMR421VSN151MP30S	330		30×35	1.45	EKMR451VSN331MR35S	
	150	25.4×25	0.89	EKMR421VSN151MQ25S	330		35×30	1.45	EKMR451VSN331MA30S	
	180	22×35	1.03	EKMR421VSN181MP35S	390		30×40	1.63	EKMR451VSN391MR40S	
	180	25.4×30	1.00	EKMR421VSN181MQ30S	470		30×45	1.85	EKMR451VSN471MR45S	
	220	22×40	1.16	EKMR421VSN221MP40S	470		30×50	1.90	EKMR451VSN471MR50S	
	220	22×45	1.19	EKMR421VSN221MP45S	470		35×35	1.77	EKMR451VSN471MA35S	
	220	25.4×35	1.16	EKMR421VSN221MQ35S	560	35×40	2.02	EKMR451VSN561MA40S		
	220	30×25	1.11	EKMR421VSN221MR25S	560	35×45	2.08	EKMR451VSN561MA45S		
	270	22×50	1.36	EKMR421VSN271MP50S	680	35×50	2.36	EKMR451VSN681MA50S		
	270	25.4×40	1.32	EKMR421VSN271MQ40S						

◆RATED RIPPLE CURRENT MULTIPLIERS

●Frequency Multipliers

Frequency(Hz)	50	120	300	1k	10k	50k
160 to 250V _{dc}	0.81	1.00	1.17	1.32	1.45	1.50
315 to 450V _{dc}	0.77	1.00	1.16	1.30	1.41	1.43

The endurance of capacitors is reduced with internal heating produced by ripple current at the rate of halving the lifetime with every 5°C rise. When long life performance is required in actual use, the rms ripple current has to be reduced.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Aluminum Electrolytic Capacitors - Snap In](#) *category:*

Click to view products by [United Chemicon](#) *manufacturer:*

Other Similar products are found below :

[159LBA016M2DC](#) [2151-4-7320](#) [2170-4-7320](#) [380LX333M025K452](#) [MAL205952101E3](#) [450-20-0021](#) [450-20-0020](#) [EET-XB2W221LA](#)
[419-2066-400](#) [MAL219866151E3](#) [EKMS551VSN820MP35S](#) [QAK2J104KTP](#) [338LBA035M2BC](#) [380LX680M500J012](#)
[381LX101M450H022](#) [382LX152M500B102VS](#) [382LX272M400B102VS](#) [382LX273M080B082VS](#) [382LXE1366](#) [383LX102M400A082](#)
[383LX152M350N082](#) [383LX222M200A052](#) [383LX223M035A052](#) [383LX821M400A062](#) [MAL219836151E3](#) [477LBA200M2BF](#)
[B41231A5279M000](#) [B41231A8129M000](#) [B41252A4109M000](#) [B41252A5229M000](#) [B41252A6129M000](#) [B41252B3159M000](#)
[B41252B9108M000](#) [B41252C5159M000](#) [B43540B2108M000](#) [382LX223M050A052](#) [383LX183M063A082](#) [478LBA035M2BD](#)
[107LBA450M2BE](#) [108LBB250M2DG](#) [108LBB080M2BC](#) [109LBA035M2DD](#) [109LBB050M2DE](#) [ELH478M080VS3AA](#)
[B41231A7159M000](#) [B41231B9478M000](#) [382LX152M400N082](#) [LGX2H680MELA25](#) [LGX2H121MELB25](#) [LGX2H271MELB50](#)