

Alchip™-MV Series

- Height 5.2 to 10.0mm
- Suitable to fit for downsized equipment
- Solvent resistant type (see PRECAUTIONS AND GUIDELINES)
- RoHS Compliant
- MV series will be discontinued, strongly recommended MVA series

MVA
↓
Downsized
MV




◆SPECIFICATIONS

Items	Characteristics							
Category Temperature Range	-40 to +85°C							
Rated Voltage Range	4 to 63V _{dc}							
Capacitance Tolerance	$\pm 20\%$ (M) (at 20°C, 120Hz)							
Leakage Current	$I=0.01CV$ or $3\mu A$, whichever is greater. Where, I : Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V) (at 20°C after 2 minutes)							
Dissipation Factor (tan δ)	Rated voltage (V _{dc})	4V	6.3V	10V	16V	25V	35V	50V
	tan δ (Max.)	D55 to F60	0.42	0.24	0.20	0.16	0.14	0.12
		H63 to JA0	—	0.40	0.30	0.26	0.16	0.14
								0.12
Low Temperature Characteristics (Max. Impedance Ratio)	Rated voltage (V _{dc})	4V	6.3V	10V	16V	25V	35V	50V
	Z(-25°C)/Z(+20°C)	7	4	3	2	2	2	2
	Z(-40°C)/Z(+20°C)	D55 to F60	15	10	8	6	4	3
		H63 to JA0	—	10	8	6	4	3
								3
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage is applied for 2,000 hours at 85°C.							
	Capacitance change	$\leq \pm 20\%$ of the initial value						
	D.F. (tan δ)	$\leq 200\%$ of the initial specified value						
	Leakage current	\leq The initial specified value						
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 500 hours at 85°C without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to Item 4.1 of JIS C 5101-4.							
	Capacitance change	$\leq \pm 15\%$ of the initial value						
	D.F. (tan δ)	$\leq 150\%$ of the initial specified value						
	Leakage current	\leq The initial specified value						

◆DIMENSIONS [mm]


●Terminal Code : A

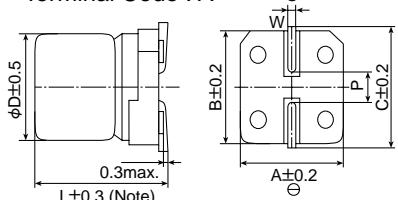Note : L ± 0.5 for H63 to JA0


Size code	D	L	A	B	C	W	P
D55 & D60	4	*5.2	4.3	4.3	5.1	0.5 to 0.8	1.0
E55 & E60	5	*5.2	5.3	5.3	5.9	0.5 to 0.8	1.4
F55	6.3	5.2	6.6	6.6	7.2	0.5 to 0.8	1.9
H63	8	6.3	8.3	8.3	9.0	0.5 to 0.8	2.3
HA0	8	10.0	8.3	8.3	9.0	0.7 to 1.1	3.1
JA0	10	10.0	10.3	10.3	11.0	0.7 to 1.1	4.5

*: L=5.7 for D60, E60 and F60.

◆MARKING



◆PART NUMBERING SYSTEM

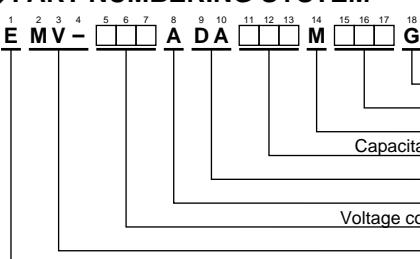

Please refer to "Product code guide (surface mount type)"



Alchip™-MV Series

◆STANDARD RATINGS

WV (V _{dc})	Cap (μF)	Size code	tanδ	Rated ripple current (mArms/ 85°C, 120Hz)	Part No.	WV (V _{dc})	Cap (μF)	Size code	tanδ	Rated ripple current (mArms/ 85°C, 120Hz)	Part No.
4	33	D55	0.42	23	EMV-4R0ADA330MD55G	35	4.7	D55	0.12	15	EMV-350ADA4R7MD55G
	47	D55	0.42	27	EMV-4R0ADA470MD55G		10	E55	0.12	25	EMV-350ADA100ME55G
	100	E55	0.42	46	EMV-4R0ADA101ME55G		22	F55	0.12	40	EMV-350ADA220MF55G
	220	F55	0.42	74	EMV-4R0ADA221MF55G		47	H63	0.14	105	EMV-350ADA470MH63G
6.3	22	D55	0.24	23	EMV-6R3ADA220MD55G		100	HA0	0.14	175	EMV-350ADA101MHA0G
	47	E55	0.24	38	EMV-6R3ADA470ME55G		220	JA0	0.14	265	EMV-350ADA221MJA0G
	100	F55	0.24	60	EMV-6R3ADA101MF55G	50	1.0	D55	0.10	6.2	EMV-500ADA1R0MD55G
	330	H63	0.40	190	EMV-6R3ADA331MH63G		2.2	D55	0.10	10	EMV-500ADA2R2MD55G
	470	HA0	0.40	265	EMV-6R3ADA471MHA0G		3.3	D55	0.10	14	EMV-500ADA3R3MD55G
	1,000	JA0	0.40	400	EMV-6R3ADA102MJA0G		4.7	E55	0.10	19	EMV-500ADA4R7ME55G
10	33	E55	0.20	35	EMV-100ADA330ME55G		10	F55	0.10	29	EMV-500ADA100MF55G
	220	H63	0.30	175	EMV-100ADA221MH63G		33	H63	0.12	95	EMV-500ADA330MH63G
16	10	D55	0.16	17	EMV-160ADA100MD55G		47	HA0	0.12	140	EMV-500ADA470MHA0G
	22	E55	0.16	32	EMV-160ADA220ME55G		100	JA0	0.12	195	EMV-500ADA101MJA0G
	47	F55	0.16	50	EMV-160ADA470MF55G	63	1.0	D60	0.12	7.0	EMV-630ADA1R0MD60G
	220	HA0	0.26	215	EMV-160ADA221MHA0G		2.2	D60	0.12	10	EMV-630ADA2R2MD60G
	330	HA0	0.26	270	EMV-160ADA331MHA0G		3.3	E60	0.12	13	EMV-630ADA3R3ME60G
	470	JA0	0.26	330	EMV-160ADA471MJA0G		10	HA0	0.12	46	EMV-630ADA100MHA0G
25	33	F55	0.14	45	EMV-250ADA330MF55G		22	HA0	0.12	69	EMV-630ADA220MHA0G
	100	H63	0.16	145	EMV-250ADA101MH63G		33	HA0	0.12	85	EMV-630ADA330MHA0G
	330	JA0	0.16	305	EMV-250ADA331MJA0G		47	HA0	0.12	101	EMV-630ADA470MHA0G

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Aluminium Electrolytic Capacitors - SMD category:

Click to view products by United Chemicon manufacturer:

Other Similar products are found below :

[EEV-FK1E332W 22927](#) [MAL214099813E3 HUB1800-S 34610](#) [RYK-50V101MG5TT-FL 107AXZ016MQ5](#) [EMF1EM101E83D00R](#)
[EMK1AM221E83D00R](#) [EMK1EM471GB0D00R](#) [EMK1VM101E83D00R](#) [EMVY350ARA221MHA0G](#) [UV2G3R3M0810VG](#)
[RVT2A4R7M0605](#) [MAL214097402E3](#) [MAL215375471E3](#) [MAL224699909E3](#) [MAL224699813E3](#) [MAL215099017E3](#) [MAL215099117E3](#)
[MAL215099818E3](#) [HV100M100E077ETR](#) [RC0J226M04005VR](#) [RC0J476M05005VR](#) [RC1A227M08010VR](#) [RC1C476M6L005VR](#)
[MAL214099111E3](#) [50SEV1M4X5.5](#) [50SKV1M4X5.5](#) [TYEH1A336E55MTR](#) [UCD1V100MCQ1GS](#) [UCX1H471MNQ1MS](#)
[35SEV47M6.3X8](#) [35SGV220M10X10.5](#) [35SLV10M5X6.1](#) [VES2R2M1HTR-0405](#) [VZH102M1ATR-1010](#) [50SEV10M6.3X5.5](#)
[50SGV1M4X6.1](#) [107SML016M](#) [EDK226M035A9DAA](#) [EEV-HA1A471UP](#) [SC1C476M05005VR](#) [UCX1H471MNS1MS](#) [VZH331M1ETR-0810](#)
[VES101M1CTR-0605](#) [6.3SEV22M4X5.5](#) [6.3SEV47M4X5.5](#) [EEVEB2V4R7Q](#) [EEEFK1H151GP](#)