


## Description

United Silicon Carbide, Inc offers the high-performance G3 SiC normally-on JFET transistors. This series exhibits ultra-low on resistance ( $R_{DS(ON)}$ ) and gate charge ( $Q_G$ ) allowing for low conduction and switching loss. The device normally-on characteristics with low  $R_{DS(ON)}$  at  $V_{GS} = 0$  V is also ideal for current protection circuits without the need for active control, as well as for cascode operation.

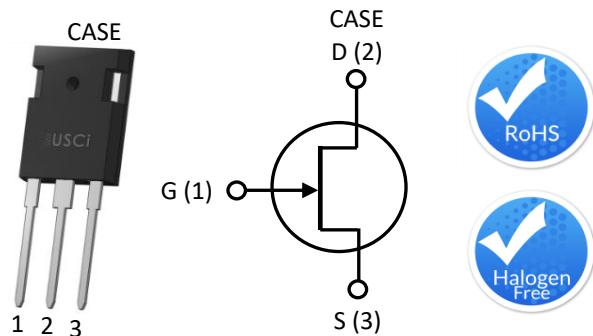

Part Number	Package	Marking
UJ3N120035K3S	TO-247-3L	UJ3N120035K3S

## Features

- ◆ Typical on-resistance  $R_{DS(on),typ}$  of 35mΩ
- ◆ Voltage controlled
- ◆ Maximum operating temperature of 175°C
- ◆ Extremely fast switching not dependent on temperature
- ◆ Low gate charge
- ◆ Low intrinsic capacitance
- ◆ RoHS compliant

## Typical Applications

- ◆ Over current protection circuits
- ◆ DC-AC inverters
- ◆ Switch mode power supplies
- ◆ Power factor correction modules
- ◆ Motor drives
- ◆ Induction heating

## Maximum Ratings

Parameter	Symbol	Test Conditions	Value	Units
Drain-source voltage	$V_{DS}$		1200	V
Gate-source voltage	$V_{GS}$	DC	-20 to +3	V
		AC <sup>(1)</sup>	-20 to +20	
Continuous drain current <sup>(2)</sup>	$I_D$	$T_C = 25^\circ\text{C}$	63	A
		$T_C = 100^\circ\text{C}$	46	A
Pulsed drain current <sup>(3)</sup>	$I_{DM}$	$T_C = 25^\circ\text{C}$	185	A
Power dissipation	$P_{tot}$	$T_C = 25^\circ\text{C}$	429	W
Maximum junction temperature	$T_{J,max}$		175	°C
Operating and storage temperature	$T_J, T_{STG}$		-55 to 175	°C
Max. lead temperature for soldering, 1/8" from case for 5 seconds	$T_L$		250	°C

(1) +20V AC rating applies for turn-on pulses <200ns applied with external  $R_G > 1\Omega$ .

(2) Limited by  $T_{J,max}$

(3) Pulse width  $t_p$  limited by  $T_{J,max}$

**Electrical Characteristics ( $T_J = +25^\circ\text{C}$  unless otherwise specified)**
**Typical Performance - Static**

Parameter	Symbol	Test Conditions	Value			Units
			Min	Typ	Max	
Drain-source breakdown voltage	$\text{BV}_{\text{DS}}$	$V_{\text{GS}} = -20\text{V}, I_{\text{D}} = 1\text{mA}$	1200			V
Total drain leakage current	$I_{\text{D}}$	$V_{\text{DS}} = 1200\text{V}, V_{\text{GS}} = -20\text{V}, T_J = 25^\circ\text{C}$		10	60	$\mu\text{A}$
		$V_{\text{DS}} = 1200\text{V}, V_{\text{GS}} = -20\text{V}, T_J = 175^\circ\text{C}$		35		
Total gate leakage current	$I_{\text{G}}$	$V_{\text{GS}} = -20\text{V}, T_J = 25^\circ\text{C}$		12	100	$\mu\text{A}$
		$V_{\text{GS}} = -20\text{V}, T_J = 175^\circ\text{C}$		50		
Drain-source on-resistance	$R_{\text{DS(on)}}$	$V_{\text{GS}} = 2\text{V}, I_{\text{D}} = 20\text{A}, T_J = 25^\circ\text{C}$		31		$\text{m}\Omega$
		$V_{\text{GS}} = 0\text{V}, I_{\text{D}} = 20\text{A}, T_J = 25^\circ\text{C}$		35	45	
		$V_{\text{GS}} = 2\text{V}, I_{\text{D}} = 20\text{A}, T_J = 175^\circ\text{C}$		68		
		$V_{\text{GS}} = 0\text{V}, I_{\text{D}} = 20\text{A}, T_J = 175^\circ\text{C}$		76		
Gate threshold voltage	$V_{\text{G(th)}}$	$V_{\text{DS}} = 5\text{V}, I_{\text{D}} = 70\text{mA}$	-14	-11.5	-6	V
Gate resistance	$R_{\text{G}}$	f = 1MHz, open drain		2.4		$\Omega$


**Typical Performance - Dynamic**

Parameter	symbol	Test Conditions	Value			Units
			Min	Typ	Max	
Input capacitance	$C_{iss}$	$V_{DS} = 100V$ , $V_{GS} = -20V$ , $f = 100kHz$		2145		pF
Output capacitance	$C_{oss}$			180		
Reverse transfer capacitance	$C_{rss}$			172		
Effective output capacitance, energy related	$C_{oss(er)}$	$V_{DS} = 0V$ to $800V$ , $V_{GS} = -20V$		105		pF
Total gate charge	$Q_G$	$V_{DS}=800V$ , $I_D = 40A$ , $V_{GS}=-18V$ to $0V$		235		nC
Gate-drain charge	$Q_{GD}$			130		
Gate-source charge	$Q_{GS}$			25		
Turn-on delay time	$t_{d(on)}$	$V_{DS}=800V$ , $I_D=40A$ , Gate Driver =-18V to 0V, $R_{G,EXT} = 1\Omega$ , Inductive Load, FWD: UJ3D1220KSD $T_J = 25^\circ C$		25		ns
Rise time	$t_r$			37		
Turn-off delay time	$t_{d(off)}$			48		
Fall time	$t_f$			39		
Turn-on energy	$E_{ON}$			935		$\mu J$
Turn-off energy	$E_{OFF}$			828		
Total switching energy	$E_{TOTAL}$			1763		
Turn-on delay time	$t_{d(on)}$	$V_{DS}=800V$ , $I_D=40A$ , Gate Driver =-18V to 0V, $R_{G,EXT} = 1\Omega$ , Inductive Load, FWD: UJ3D1220KSD $T_J = 150^\circ C$		24		ns
Rise time	$t_r$			35		
Turn-off delay time	$t_{d(off)}$			43		
Fall time	$t_f$			37		
Turn-on energy	$E_{ON}$			880		$\mu J$
Turn-off energy	$E_{OFF}$			800		
Total switching energy	$E_{TOTAL}$			1680		


**Thermal Characteristics**

Parameter	symbol	Test Conditions	Value			Units
			Min	Typ	Max	
Thermal resistance, junction-to-case	$R_{0JC}$			0.27	0.35	°C/W


## Typical Performance Diagrams

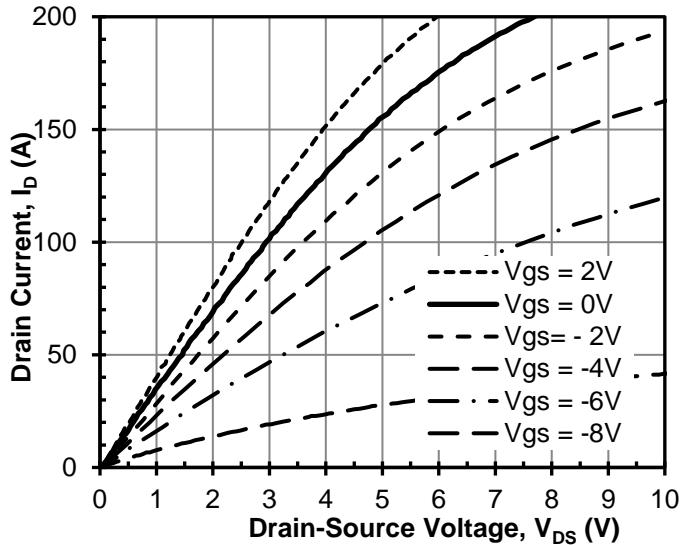


**Figure 1 Typical output characteristics  
at  $T_J = -55^\circ\text{C}$**

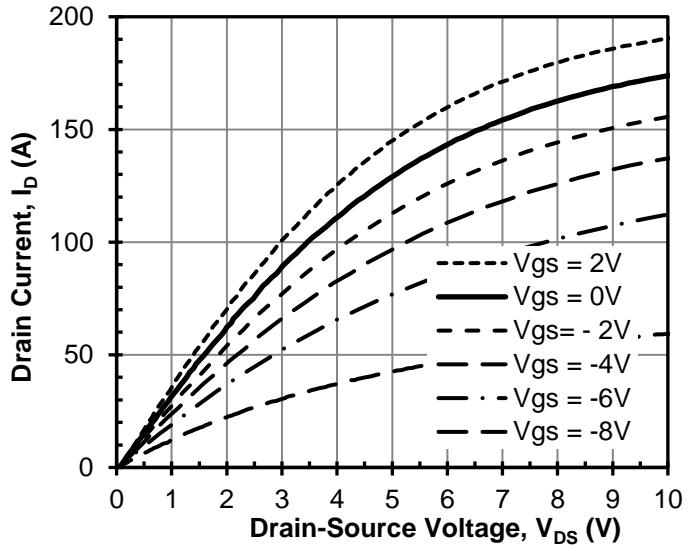


**Figure 2 Typical output characteristics  
at  $T_J = 25^\circ\text{C}$**

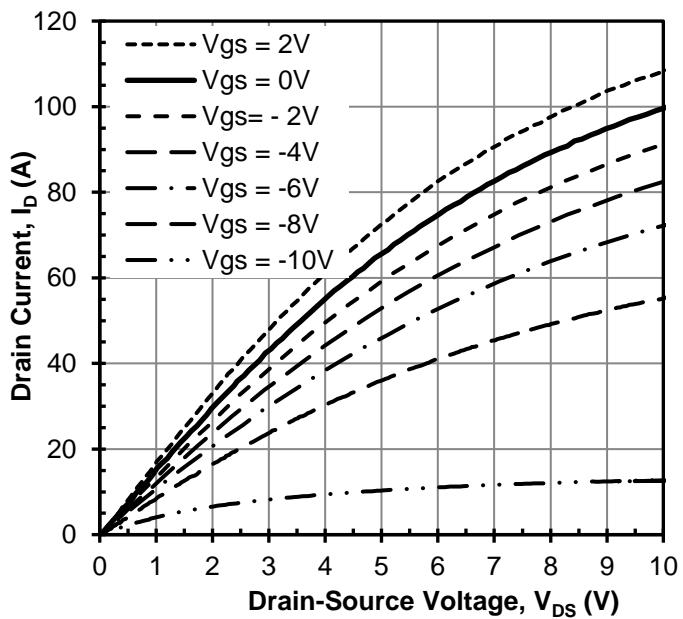


**Figure 3 Typical output characteristics  
at  $T_J = 175^\circ\text{C}$**

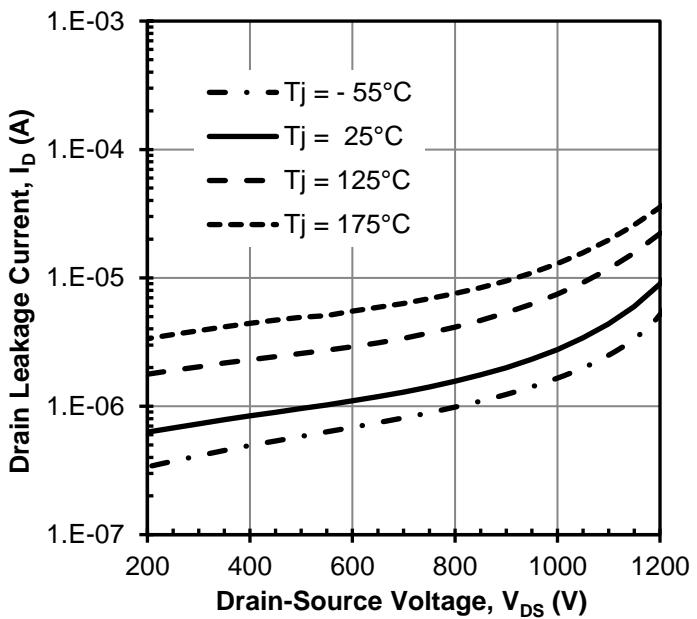


**Figure 4 Typical drain-source leakage  
at  $V_{GS} = -20\text{V}$**

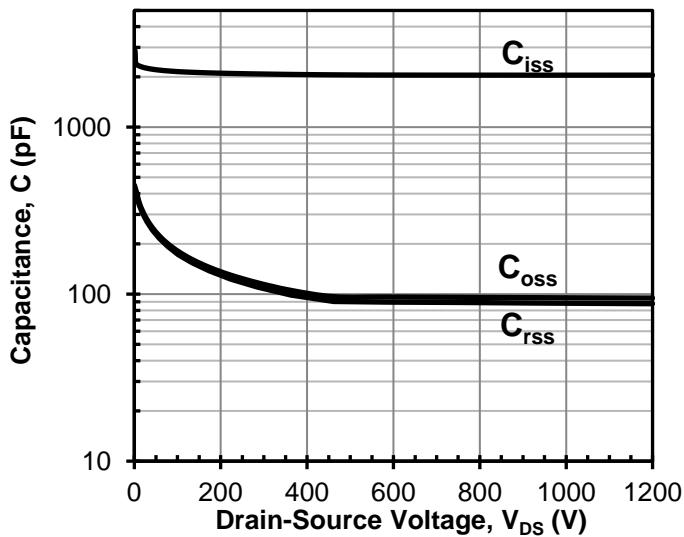


**Figure 5** Typical capacitances at 100kHz  
and  $V_{GS} = -20V$

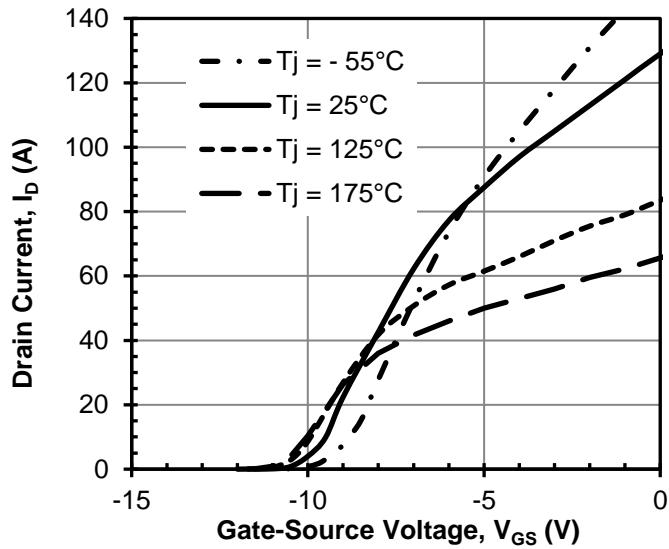


**Figure 6** Typical transfer characteristics  
at  $V_{DS} = 5V$

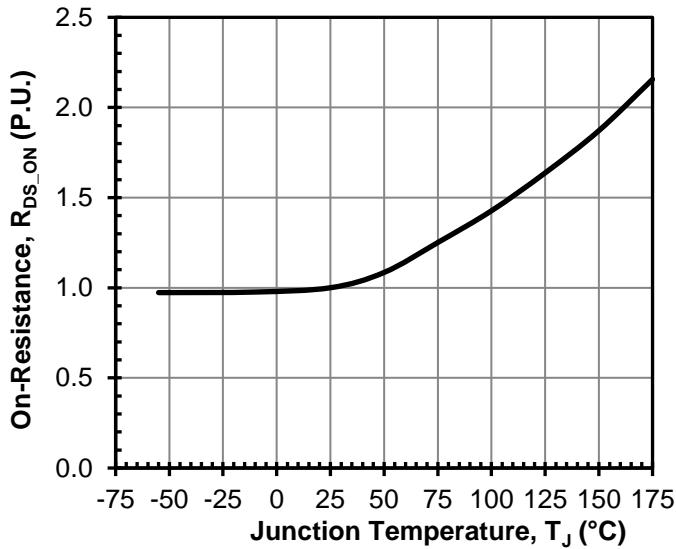


**Figure 7** Normalized on-resistance vs.  
temperature at  $V_{GS} = 0V$  and  $I_D = 20A$

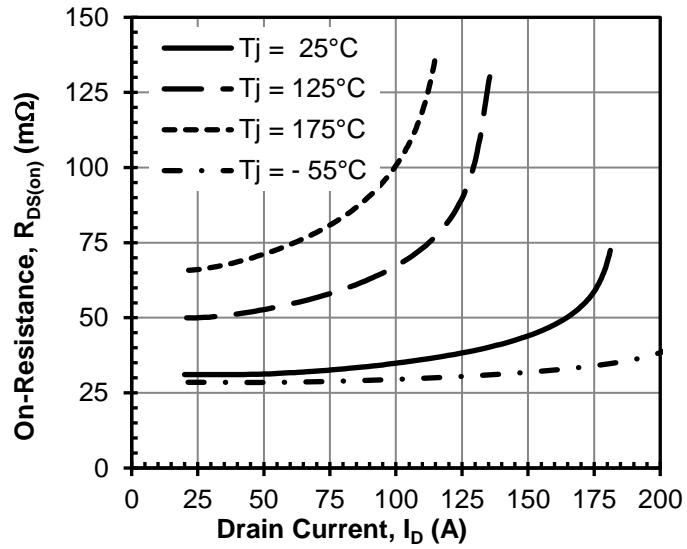


**Figure 8** Typical drain-source  
on-resistance at  $V_{GS} = 0V$

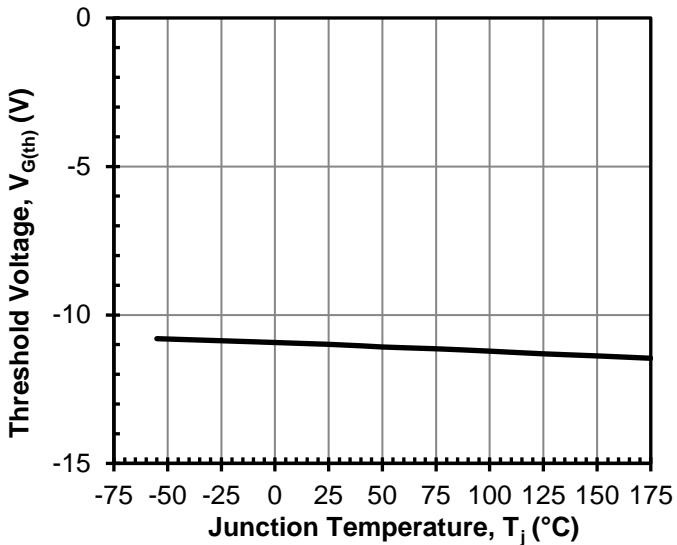


**Figure 9 Threshold voltage vs.  $T_j$   
at  $V_{DS} = 5V$  and  $I_D = 70mA$**

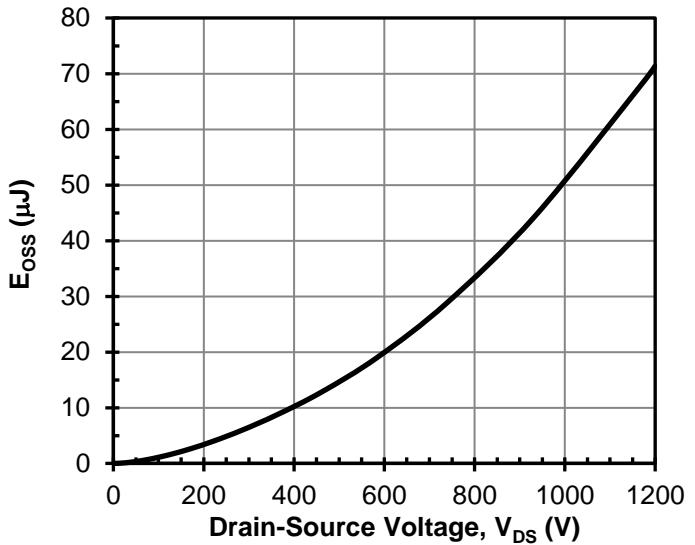


**Figure 10 Typical stored energy in  $C_{oss}$   
at  $V_{GS} = -20V$**

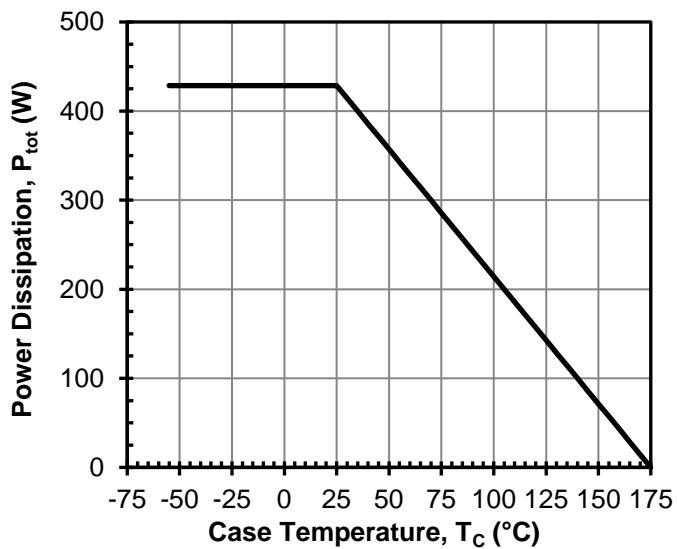


**Figure 11 Total power Dissipation**

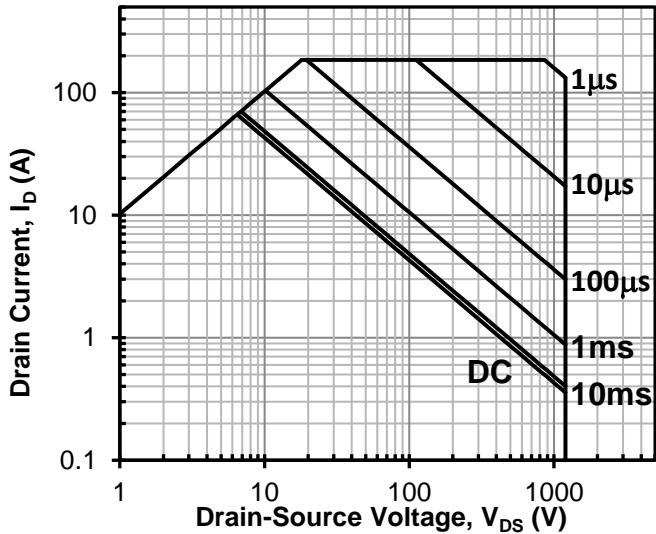


**Figure 12 Safe operation area  
 $T_c = 25^{\circ}C$ , Parameter  $t_p$**

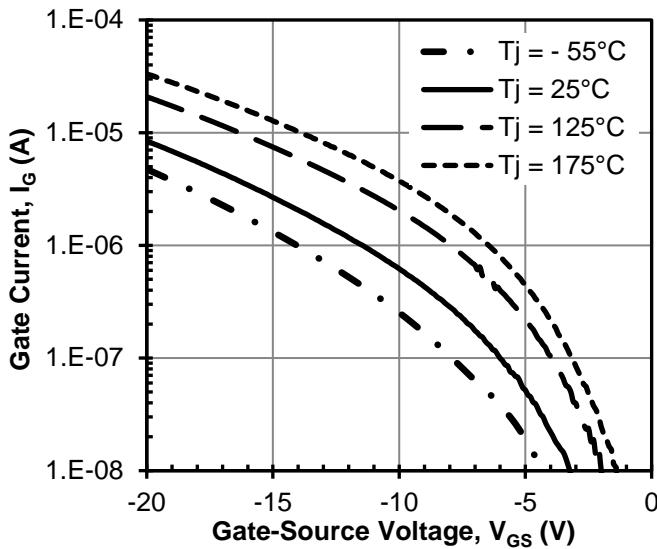


**Figure 13** Typical gate leakage current  
at  $V_{DS} = 0V$

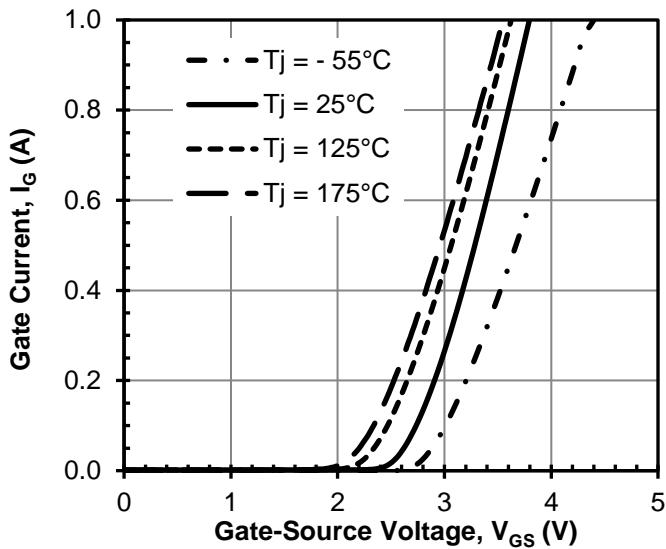


**Figure 14** Typical gate forward current  
at  $V_{DS} = 0V$

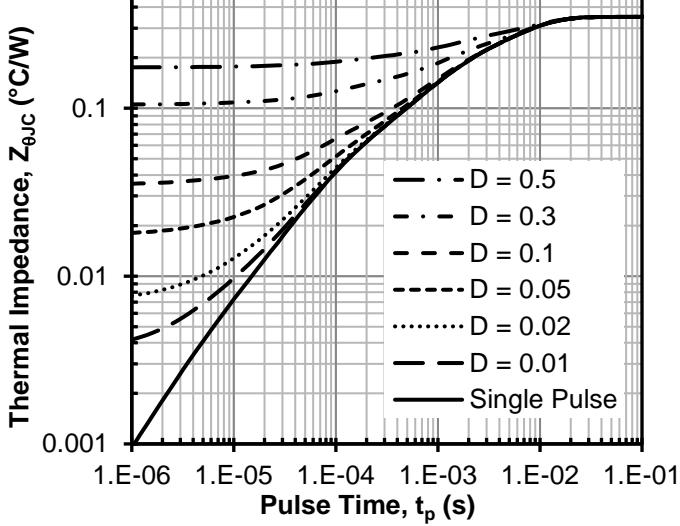


**Figure 15** Maximum transient  
thermal impedance

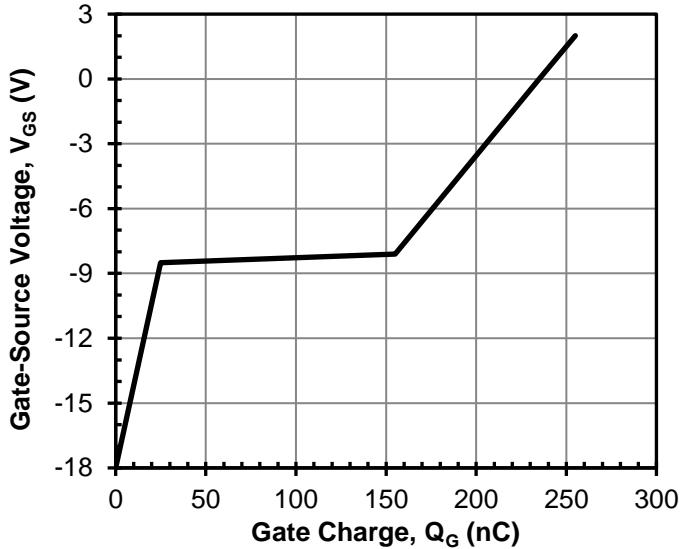


**Figure 16** Typical gate charge  
at  $V_{DS} = 800V$  and  $I_D = 40A$

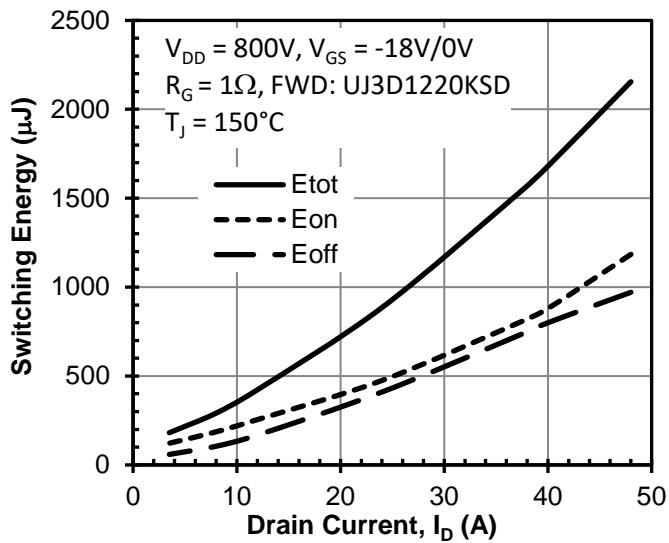

**Figure 17** Clamped inductive switching energy vs. drain current at  $T_J = 150^\circ C$

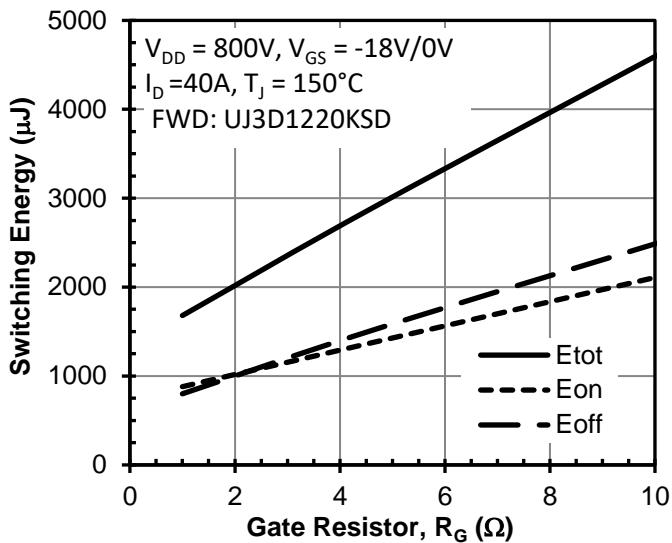

**Figure 18** Clamped inductive switching energy vs. gate resistor  $R_G$

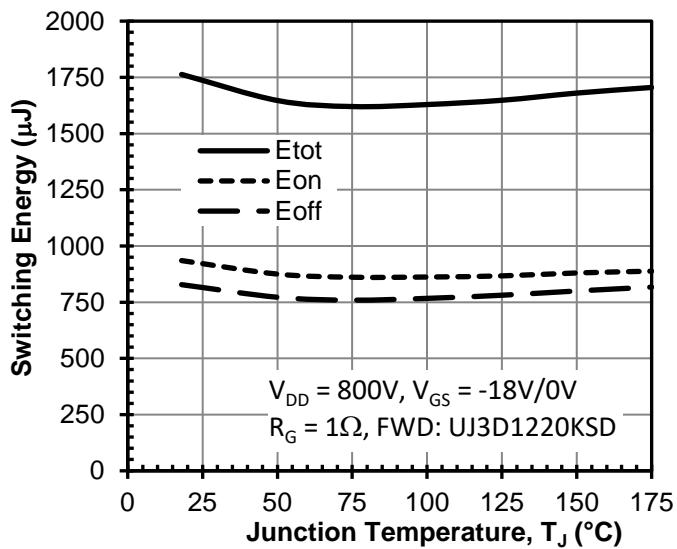

**Figure 19** Clamped inductive switching energy vs. junction temperature at  $I_D = 40A$

## Disclaimer

United Silicon Carbide, Inc. reserves the right to change or modify any of the products and their inherent physical and technical specifications without prior notice. United Silicon Carbide, Inc. assumes no responsibility or liability for any errors or inaccuracies within.

Information on all products and contained herein is intended for description only. No license, express or implied, to any intellectual property rights is granted within this document.

United Silicon Carbide, Inc. assumes no liability whatsoever relating to the choice, selection or use of the United Silicon Carbide, Inc. products and services described herein.

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for JFET category:***

***Click to view products by UnitedSiC manufacturer:***

Other Similar products are found below :

[MCH3914-8-TL-H](#) [F5606](#) [2SK2394-6-TB-E](#) [CPH5901G-TL-E](#) [MCH3914-7-TL-H](#) [MCH5908H-TL-E](#) [CPH5902G-TL-E](#) [CPH5905G-TL-E](#)  
[CPH5905H-TL-E](#) [2SK2394-7-TB-E](#) [NSVJ2394SA3T1G](#) [2N3819](#) [PN4393](#) [MMBFJ176](#) [2N4393](#) [U311](#) [2N5397](#) [2SK208-GR\(TE85L,F\)](#)  
[MMBF4393LT1G](#) [J176\\_D74Z](#) [IF4500](#) [SMP4338](#) [SMP147](#) [SMP4117](#) [SMP5116](#) [SMPJ232](#) [SMPJ310](#) [SMPJ109](#) [SMP4856](#) [IF1330](#)  
[SMPJ201](#) [SMP4340](#) [SMP5484](#) [IFN5566](#) [2N2609](#) [2N3821](#) [2N3823](#) [2N3970](#) [2N3971](#) [2N3972](#) [2N4091](#) [2N4092](#) [2N4093](#) [2N4118](#) [2N4118A](#)  
[2N4221](#) [2N4221A](#) [2N4338](#) [2N4339](#) [2N4416A](#)