
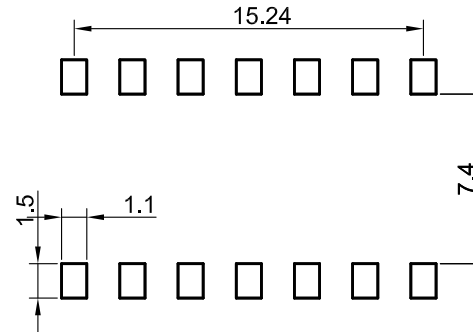
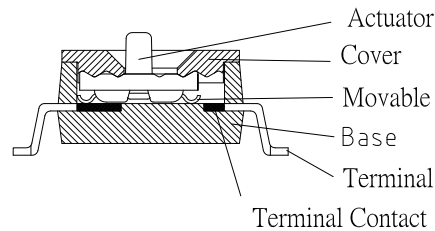
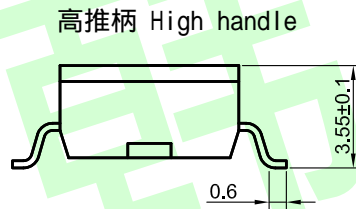


DSIC-T-XX - X

PIN數選項(N)

Packing :

R: Reel  
T: Tube

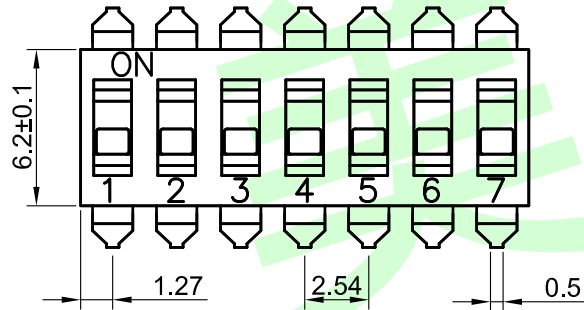

Poles(N)	A (mm)
01	2.54
02	5.08
03	7.62
04	10.16
05	12.70
06	15.24
07	17.78
08	20.32
09	22.86
10	25.40
12	30.48

**规格：**

电气寿命：  
 无切换：100mA@50VDC  
 切换：25mA@24VDC  
 绝缘电阻：100M @250VDC  
 接触电阻：50M max  
 绝缘强度：500VAC/1min  
 操作力度：500gf max  
 使用温度：-30 to 85 (no ice)

**材料：**

开关盖：PPS UL 94-V0  
 开关体：PPS UL 94-V0  
 操作杆：PA46 UL 94-V0  
 弹片：镀金铍铜  
 端子：镀金黄铜

Dongguan Usakro Electronic Technology Co., Ltd.

design	date	name	DSIC-T-07
Review	date		
Approved	date		
Drawing number:		name	
modify	Review		
Approved	Tolerance not specified	Proportion	1:1
unit	mm	gape number	
			A4

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [DIP Switches/SIP Switches](#) category:*

*Click to view products by [USAKRO](#) manufacturer:*

Other Similar products are found below :

[79B10T](#) [8136-475G4T](#) [G7G-1A2-CB-DC12](#) [DRR60016](#) [DRS4016](#) [1825444-1](#) [200183](#) [206002](#) [219-6LPSTRF](#) [25.350.0653.0](#)  
[SDA10H1BDA](#) [97R06ST](#) [A2C-2A5](#) [1825058-4](#) [1825444-7](#) [ADE08SA04](#) [ADE12S04](#) [192960010](#) [206005RAS](#) [206007](#) [2-1825058-8](#)  
[25.352.0353.0](#) [CXDRIVEV2X](#) [LA2-002-DC24](#) [DSR02T](#) [E2FMX2D1M1TGJ03M](#) [NDI10H](#) [219-9MSTP](#) [EPM02FV](#) [206010RAST](#) [219-](#)  
[5LPSTJRF](#) [76SB05](#) [TD06H0SK1](#) [Z7.255.9027.0](#) [1-1825058-3](#) [1825428-4](#) [219-10LPSTF](#) [E3ZG6111D03M](#) [G4D212PUSTV2DC5](#)  
[EPG301BT06](#) [1-1825058-6](#) [E3TSL23M5J03M](#) [Y5795](#) [7R0060](#) [HARW0001](#) [ADE07S04](#) [432220096](#) [206005](#) [206006](#) [206010](#)