

1.Features:

- Designed to meet IEEE 802.3 requirements.
- Suitable for End-span POE applications with 600mA current capability @57V(Continuous)
- RoHS compliant


2.Specifications:

- Primary inductance (LP):350uH,min.@100KHz,0.1Vrms,8mA .


Electrical Specification@25°C Operating Temperature 0 to +70°C

Part No.	Trun Ratio (±3%)		OCL primary@ 100KHz,0.1Vrms 8mA	Leakage primary@ 100KHz,0.1Vrms	Cww 100KHz/1V	DCR (Ω)							
	TX	RX				Primary	Secondary						
KG4801SR	1:1	1:1	350uH Min	0.5uH Max	35pF Max	0.9 Max	1.2 Max						
Part No.	Insertion loss (dB MAX) 1-100MHz	Return loss (dB MHz)					Differential to COMMON Mode Rejection (dB MIN)			Crosstalk (dB MIN .) MHz			Hipot (Vrms MIN)
		1-30MHz	40MHz	50MHz	60-80MHz	100MHz	30MHz	60MHz	100MHz	30MHz	60MHz	100MHz	
KG4801SR	-1.0	-16	-14.4	-13.1	-12	-10	-45	-40	-35	-43.5	-37.5	-33	1500

3.Dimension:mm(inch)+/-0.25(0.01)

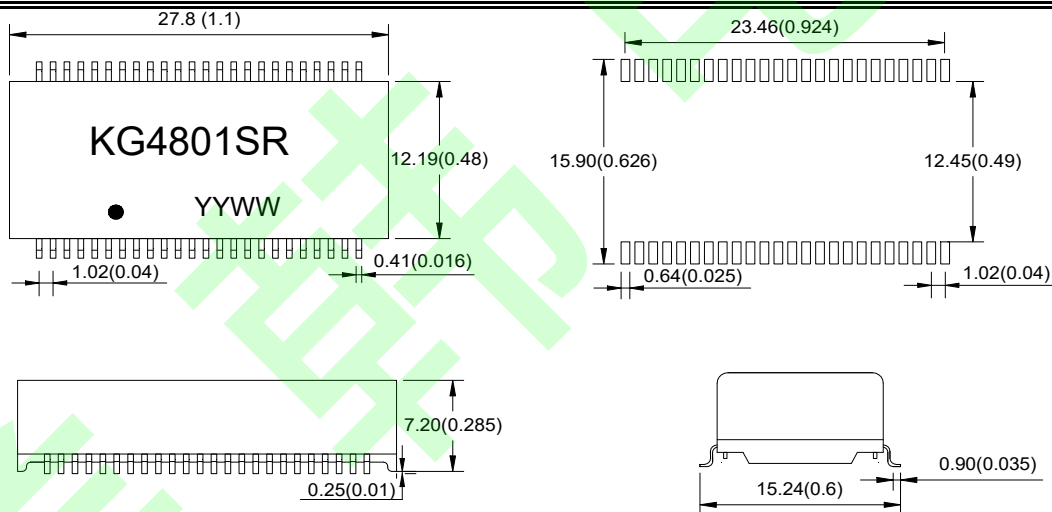


4.Schematic

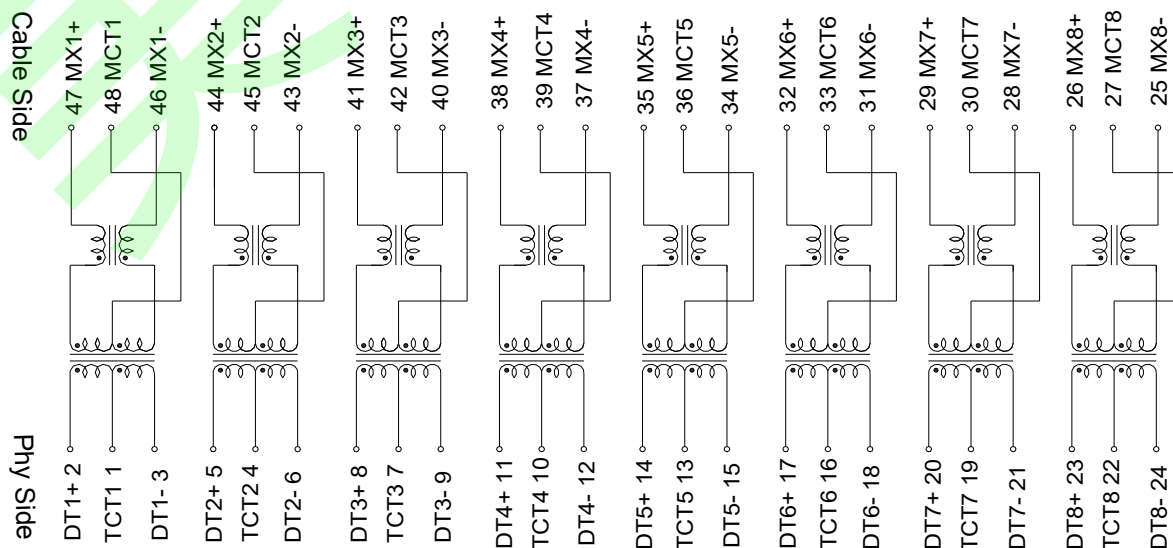

5.SUGGEST PROFILE

IR reflow graph

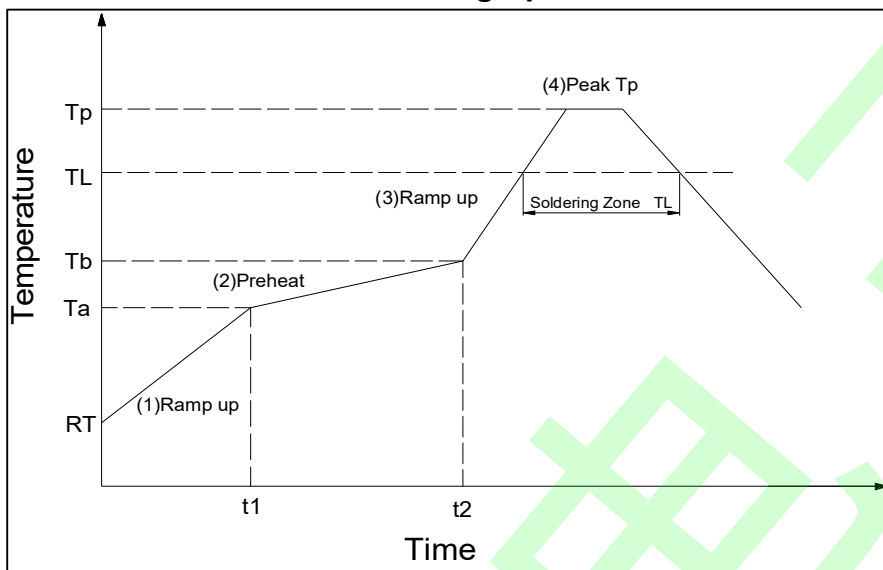

IR reflow profile

Form-1 (Reference JEDEC J-STD-020C Table 5-2))

IR reflow profile		Sn-Pb	Pb-free
step#	Profile Feature	Condition/Duration	Condition/Duration
step1	Ramp-up rate	1.5-3°C/sec.	1.5-3°C/sec.
step2	Preheat : 100~150°C(Ta-Tb)	t1-t2 : 60~120 sec.	t1-t2 : 60~180 sec.
step3	Ramp-up rate(T _L to T _P)	1.5-3°C/sec.	1.5-3°C/sec.
	Temperature maintained above 183°C(T _L)	T _L : 60-150sec.	T _L : 80-150sec.
step4	Peak temperature(T _P)	230+5/-10°C	260+0/-5°C
	Time within 5°C of actual peak temperature	30±10 sec.	30±10 sec.
step5	Ramp-down rate	6°C/sec.Max	6°C/sec.Max
Note1	Subject the samples to 3 cycles of the above defined reflow conditions		Subject the samples to 3 cycles of the above defined reflow conditions
Note2	Time 25°C to peak temperature : 6 minutes max.		Time 25°C to peak temperature : 8 minutes max.
Note3			The time between reflows shall be 5 minutes minimum and 60minutes maximum

SnPb Eutectic Process- "Package Peak Reflow Temperature"

Form-2 (Reference JEDEC J-STD-020C Table 4-1)

产品厚度	产品体积 < 350mm ³	产品体积 ≥ 350mm ³
< 2.5mm	240 +0/-5°C	225 +0/-5°C
≥ 2.5mm	225 +0/-5°C	225 +0/-5°C

Pb-free Process - "Package Peak Reflow Temperature"

Form-3 (Reference JEDEC J-STD-020C Table 4-2)

产品厚度	产品体积 < 350mm ³	产品体积 350mm ³ -2000mm ³	产品体积 > 2000mm ³
< 1.6mm	260 +0/-5°C	260 +0/-5°C	260 +0/-5°C
1.6mm-2.5mm	260 +0/-5°C	250 +0/-5°C	245 +0/-5°C
> 2.5mm	250 +0/-5°C	245 +0/-5°C	245 +0/-5°C




东莞市美韩电子科技有限公司

REV: 00

Dongguan Usakro Electronic Technology Co., Ltd.

Page: 2 of 3

6. Reliability																								
No.	Test Item	Refer To Standard	Test Condition																					
1	Resistance To Soldering Heat--Convection Reflow	IPC/JEDEC J-STD-020D	1). Peak Temperature: Refer to Specification According to Package Body Thickness And Volume 2). Preheat Temperature and Soak Time: 150~200°C, 60~120 Seconds 3). Average Ramp-up Rate: 3°C/Second Max 4). Above 217°C: 60~150 Seconds 5). Peak Temperature-5°C: Over 30 S																					
2	Thermal Shock	IEC68-2-14 Method A	1. Low Temperature: -40°C 2. High Temperature: 125 3. Dwell Time: 30 Minutes 4. Transition Time: Less Than 5 Minutes 5. Number of Cycles: 10																					
3	High Temperature	IEC68-2-2 Method A	125°C, 96 Hours																					
4	Low Temperature	IEC68-2-1 Method A	-40°C, 96 Hours																					
5	Temperature Humidity Cycle	IEC68-2-38	<table border="1"> <thead> <tr> <th>Temp</th> <th>Humidity</th> <th>soak time</th> </tr> </thead> <tbody> <tr> <td>25~65°C</td> <td>93+/-3%RH</td> <td>1.5 hr</td> </tr> <tr> <td>65°C</td> <td>93+/-3%RH</td> <td>4 hr</td> </tr> <tr> <td>65~25°C</td> <td>80~96%RH</td> <td>2.5 hr</td> </tr> <tr> <td>25~65°C</td> <td>93+/-3%RH</td> <td>1.5hr</td> </tr> <tr> <td>65°C</td> <td>93+/-3%RH</td> <td>4hr</td> </tr> <tr> <td>65~25°C</td> <td>80~96%RH</td> <td>2</td> </tr> </tbody> </table>	Temp	Humidity	soak time	25~65°C	93+/-3%RH	1.5 hr	65°C	93+/-3%RH	4 hr	65~25°C	80~96%RH	2.5 hr	25~65°C	93+/-3%RH	1.5hr	65°C	93+/-3%RH	4hr	65~25°C	80~96%RH	2
Temp	Humidity	soak time																						
25~65°C	93+/-3%RH	1.5 hr																						
65°C	93+/-3%RH	4 hr																						
65~25°C	80~96%RH	2.5 hr																						
25~65°C	93+/-3%RH	1.5hr																						
65°C	93+/-3%RH	4hr																						
65~25°C	80~96%RH	2																						
6	Vibration	IEC68-2-6	1. Sine Wave 2. Amplitude: 0.75mm 3. Frequency: 5~500~5Hz 4. Direction: X, Y, Z 5. Number of Sweep Cycles Per Direction: 10 6. Duration: 2 Hours Each Direction																					
7	Mechanical Shock	MIL-STD-202	1). Half -Sine Wave 2). Peak Acceleration: 50G 3). Duration: 11ms 4). Direction: X, Y, Z, -X, -Y, -Z 5). Number of Shock Per Direction: 3																					
8	Free Drop	ISO4180	1) Height: Refer to Specification According to Production weight 2). 1 Corner, 3 Edges, 6 Faces . Total Are 10 Times																					
9	Solderability	JESD22-B102D	1). Precondition: 150±5°C, 16±0.5 Hours 2). Flux Type: ROL1 3). Immersion Flux Time: 5~10 Seconds 4). Solder Temperature: 245±5°C 5). Solder Immersion Time: 5±0.5 Seconds 6). Solder Immersion/Emersion Speed: 25.4±6.4mm/Second																					
10	Accelerated Moisture Resistance---Unbiased Autoclave	JESD22-A102-C	1. Temperature: 121°C 2. Humidity: 100% 3. Vapor Pressure: 29.7 Psia or 205KPa 4. Duration: 96 hours																					
		东莞市美韩电子科技有限公司	REV: 00																					
		Dongguan Usakro Electronic Technology Co., Ltd.	Page: 3 of 3																					

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Audio Transformers](#) / [Signal Transformers](#) category:

Click to view products by [USAKRO](#) manufacturer:

Other Similar products are found below :

[CU4S0506AT-2655-H1](#) [MGPWT-00449-P](#) [PE-64961](#) [1812WBT2-4](#) [BX1194WNL](#) [1879479-1](#) [PA1528ANL](#) [T1137NLT](#) [T3012NL](#) [PE-65848FNLT](#) [H5019EFNL](#) [CX2045ALNLT](#) [MET-14](#) [MGPWT-00059-P](#) [MGPWT-00266-P](#) [MGPWT-00278-P](#) [MGPWT-00431-P](#) [TTC-100](#) [TTC-143-H](#) [TTC-5032-1](#) [4-1879391-0](#) [100213](#) [T1142NL](#) [T1124NL](#) [1879732-1](#) [2-1879391-5](#) [B8846NL](#) [MABA-010321-CT1A42](#) [TX1341NL](#) [H0013FNL](#) [H5020FNL](#) [H2009FNLT](#) [H5004NLT](#) [S553-5999-52-F](#) [T5008NLT](#) [PE-68517T](#) [TG111-E212NWLFR](#) [MGPWT-00339-P](#) [H5014FNLT](#) [TX1473NLT](#) [PE-69011NLT](#) [CX2043LNLT](#) [H7137FNLT](#) [H1259NLT](#) [TX1344NLT](#) [LM-LP-1005L](#) [H0013NLT](#) [S558-5500-JV](#) [TX1193NLT](#) [T7015NL](#)