




FREE	LOCK
1 2 3	1 2 3
0 0 0	0 0 0
0 0	5 0 0
4 5 6	4 5 6



View A



	SPECIFICATION	
	1.环境温度(Operating Temp)	-20℃~+80℃
	2.相对湿度(Working Humidity)	5%~35%
١	3.额定规格(Rated Value)	DC50V/30mA
	4.接触电阻(Contact Resistance)	100mΩ max
	5.绝缘电阻(Insulation Resistance)	100MΩ min
	6.耐电压(Withstand Voltage)	250Vac/60S
	7.动作力(Operating Force)	250±50gf
	8.使用寿命(Operating Life)	100,000 cycle

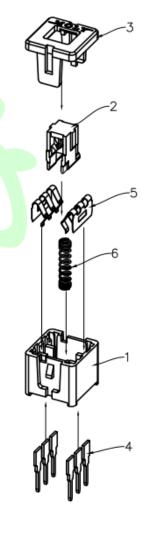

				1
7	Crochet Hook	1PCS	Carbon Steel	
6	Spring	1PCS	Carbon Steel	L
5	Contact Chip	2PCS	Silver-Coated Copper	
4	Terminals	6PCS	Copper plated Silver	告 co
3	Panel	1PCS	LCP Natural Color	
2	Keypad	1PCS	LCP Black	
1	Housing	1PCS	LCP Black	
序号 NO.	零件名称 PART NAME	数量 O'TY	材 质 MATERIAL	

东莞市美韩电子科技有限公司

Dongguan Usakro Electronic Technology Co., Ltd.

公差 nmon tolerance:	əp 图 DRAWN	JEFF	\oplus	\Diamond	BASTitle: 7x7平头无锁开关		
0~5±0.15;	日 期 DATE	2018-7-18	单位 UNIT	mm	Push Switch		
5~10±0.3; 10~30±0.5;	审 核 CHECKED	JEFF	比例 SCALE	free	科号Part NO.		
角度angular: ±0.5°;	核 准 APPROVED	JEFF	尺寸 SIZE	A4	UK-G0704-WS-Y		

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Pushbutton Switches category:

Click to view products by USAKRO manufacturer:

Other Similar products are found below:

LW1L-M1C10V-A LW2L-A1C20M-GD LW2L-M1C20M-A 60324L M7E-HRN2 67021K512 67081K512X 701PB580 719-5504-000

MDPSSGLFS 810KSV30B MML21KA3ABK MML23KA3AC05K-001 MML23KW3AA01W 8418K2 8646AB6X718UL 8646ABUL

FSDWH 9001KXRK 9001T8BK 9533CD4+U574+U4922 1203MRA A22EM01S A595 1202A6 12037A2ULCSA 1203A2UL ABD122N
B 1211390004 ABN111-Y ABN400-R 1211500044 1211580012 1212MRA 1232A6NF RA3CSH6A 1241.1183.7047 1241.2511

1241.3428 1223A2ULCSA 1223MRA 1232AX2119 1241.1183.8000 1241.1183.8029 1241.2506 1241.2606 12MA6 1301940184

RELBARF6X10(PLASTIC) 13435AG