

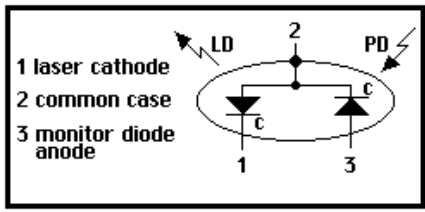
US-Lasers: 780nm-5mW - Infrared Laser Diodes and Infrared Diode Laser Modules

[Back to Laser Modules](#)

TECHNICAL DATA for LASER MODULE		
Barrel Specs: <ul style="list-style-type: none"> 3/8 - 56 Thread Size Dia: 10.4mm Length: 17mm 	Collect Specs: <ul style="list-style-type: none"> 3/8 - 56 Thread Size 4.3mm Aperature Half Hard Brassbbb 	Lens Housing Specs: <ul style="list-style-type: none"> 3/8 - 56 Thread Size 3.7mm Aperture 7mm Plastic Lens

INFRARED DIODE LASER DATA SHEETS

ABSOLUTE MAXIMUM RATINGS - (Tc=25 °C)

TECHNICAL DATA		
<ul style="list-style-type: none"> Index Guided MQW Structure Wavelength: 780nm (Typ.) Optical Power: 5mW CW Threshold Current: 25mA (Typ.) Standard Package: 5.6mm 		
Infrared light output	780nm	Pin Out Diagram - Style A
Optical power output	5mW CW	
Package Type	5.6mm	
Built-in photo diode for monitoring laser output		

Items	Symbols	Values	Unit
Optical output power	Po	5	mW
Laser diode reverse voltage	VLDR	2	V
Photo diode reverse voltage	VPDR	30	V
Operating temperature	Topr	-10 ~ +40	°C
Storage temperature	Tstg	-40 ~ +85	°C

OPTICAL and ELECTRICAL CHARACTERISTICS - (Tc=25 °C)

Items	Symbols	Min.	Typ.	Max.	Unit	Test Condition
Optical output power	Po	-	5	-	mW	-
Threshold current	Ith	15	25	40	mA	-
Operating current	Iop	25	35	50	mA	Po=5mW
Operating voltage	Vop	1.9	2.1	2.5	V	Po=5mW
Lasing wavelength	λ D	770	780	790	nm	Po=5mW
Beam divergence	θ F	8	11	15	deg	Po=5mW
Beam divergence	θ z	20	35	45	deg	Po=5mW
Slope Efficiency (mW/mA)	η	0.1	0.3	0.6		-
Monitor current	Im	100	200	600	μ A	Po=5mW, Vr=5V
Astigmatism	As	-	11	-	μ m	Po=5mW
MTTF			3000-5,000 hrs.			Po=5mW, NA=0.4
Emitter Size		1 x 4 Microns				
Emitter Distance to Cap Lens Structure		0.3mm				
		Index Guided				

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [us-lasers](#) manufacturer:

Other Similar products are found below :

[HK-10.4](#) [D8085I](#) [HK-6.4](#) [VOL7805I](#) [MM8505I](#) [NS102-200K](#) [THAD 5.6-9MM](#) [VOL6505I](#) [M8085I](#) [D8505I](#) [M7805I](#) [AD 5.6-9MM](#)
[NS102A-200K](#) [M6355I](#) [D6355I](#) [M8505I](#) [M6505I](#) [D405-120](#) [D7805I](#) [D405-20](#) [MM6505I](#)