


Features

- N-Channel, 5V Logic Level Control
- Enhancement mode
- Low on-resistance $R_{DS(on)}$ @ $V_{GS}=4.5$ V
- Fast Switching
- Pb-free lead plating; RoHS compliant


V_{DS}	60	V
$R_{DS(on),TYP}$ @ $V_{GS}=10$ V	71	$\text{m}\Omega$
$R_{DS(on),TYP}$ @ $V_{GS}=4.5$ V	89	$\text{m}\Omega$
I_D	2.8	A

SOT23

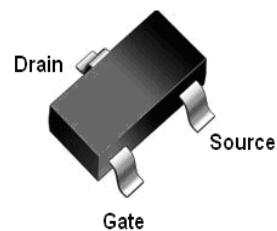

Halogen-Free

Part ID	Package Type	Marking	Tape and reel information
VS6640AC	SOT23	VS04	3000pcs/reel



Maximum ratings, at $T_j=25$ °C, unless otherwise specified

Symbol	Parameter	Rating	Unit
$V_{(BR)DSS}$	Drain-Source breakdown voltage	60	V
I_s	Diode continuous forward current	$T_A=25^\circ\text{C}$	A
I_D	Continuous drain current @ $V_{GS}=10$ V	$T_A=25^\circ\text{C}$	A
		$T_A=100^\circ\text{C}$	A
I_{DM}	Pulse drain current tested ①	$T_A=25^\circ\text{C}$	A
P_D	Maximum power dissipation	$T_A=25^\circ\text{C}$	W
V_{GS}	Gate-Source voltage	± 20	V
$T_{STG} T_J$	Storage and operating temperature range	-55 to 150	°C

Thermal Characteristics

Symbol	Parameter	Typical	Unit
$R_{\theta JL}$	Thermal Resistance-Junction to Lead	80	°C/W
$R_{\theta JA}$	Thermal Resistance-Junction to Ambient	125	°C/W

Symbol	Parameter	Condition	Min.	Typ.	Max.	Unit
Static Electrical Characteristics @ $T_j = 25^\circ\text{C}$ (unless otherwise stated)						
$V_{(\text{BR})\text{DSS}}$	Drain-Source Breakdown Voltage	$V_{\text{GS}}=0\text{V}, I_D=250\mu\text{A}$	60	--	--	V
I_{DSS}	Zero Gate Voltage Drain Current	$V_{\text{DS}}=60\text{V}, V_{\text{GS}}=0\text{V}$	--	--	1	μA
	Zero Gate Voltage Drain Current($T_j=125^\circ\text{C}$)	$V_{\text{DS}}=60\text{V}, V_{\text{GS}}=0\text{V}$	--	--	100	μA
I_{GSS}	Gate-Body Leakage Current	$V_{\text{GS}}=\pm 20\text{V}, V_{\text{DS}}=0\text{V}$	--	--	± 100	nA
$V_{\text{GS}(\text{TH})}$	Gate Threshold Voltage	$V_{\text{DS}}=V_{\text{GS}}, I_D=250\mu\text{A}$	1.3	1.8	2.4	V
$R_{\text{DS}(\text{ON})}$	Drain-Source On-State Resistance②	$V_{\text{GS}}=10\text{V}, I_D=5\text{A}$	--	71	82	$\text{m}\Omega$
$R_{\text{DS}(\text{ON})}$	Drain-Source On-State Resistance②	$V_{\text{GS}}=4.5\text{V}, I_D=4\text{A}$	--	89	107	$\text{m}\Omega$
Dynamic Electrical Characteristics @ $T_j = 25^\circ\text{C}$ (unless otherwise stated)						
C_{iss}	Input Capacitance	$V_{\text{DS}}=30\text{V}, V_{\text{GS}}=0\text{V}, f=1\text{MHz}$	450	505	550	pF
C_{oss}	Output Capacitance		--	30	45	pF
C_{rss}	Reverse Transfer Capacitance		--	20	30	pF
R_g	Gate Resistance	f=1MHz		5.8		Ω
Q_g	Total Gate Charge	$V_{\text{DS}}=30\text{V}, I_D=5\text{A}, V_{\text{GS}}=10\text{V}$	--	11	--	nC
Q_{gs}	Gate-Source Charge		--	4	--	nC
Q_{gd}	Gate-Drain Charge		--	3.5	--	nC
Switching Characteristics						
$t_{\text{d}(\text{on})}$	Turn-on Delay Time	$V_{\text{DD}}=30\text{V}, I_D=5\text{A}, R_G=3\Omega, V_{\text{GS}}=10\text{V}$	--	7.5	--	nS
t_r	Turn-on Rise Time		--	4.5	--	nS
$t_{\text{d}(\text{off})}$	Turn-Off Delay Time		--	22.5	--	nS
t_f	Turn-Off Fall Time		--	9	--	nS
Source- Drain Diode Characteristics@ $T_j = 25^\circ\text{C}$ (unless otherwise stated)						
V_{SD}	Forward on voltage	$I_{\text{SD}}=5\text{A}, V_{\text{GS}}=0\text{V}$	--	0.9	1.2	V
t_{rr}	Reverse Recovery Time	$T_j=25^\circ\text{C}, I_{\text{SD}}=5\text{A}, \frac{di}{dt}=500\text{A}/\mu\text{s}$	--	10	--	nS
Q_{rr}	Reverse Recovery Charge			15		nC

NOTE:

① Repetitive rating; pulse width limited by max. junction temperature.

② Pulse width $\leq 300\mu\text{s}$; duty cycle $\leq 2\%$.

Typical Characteristics

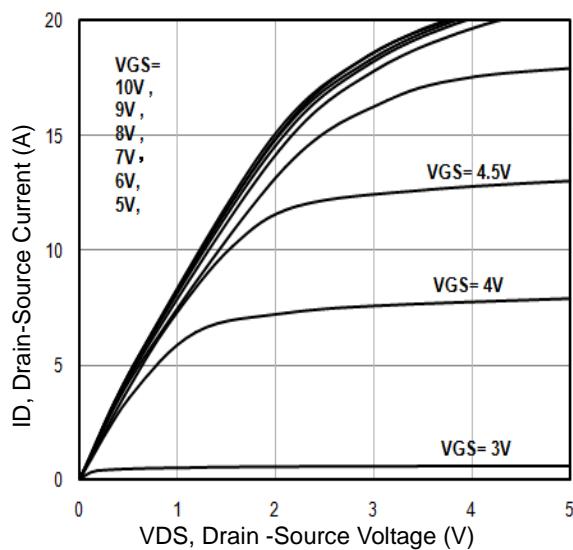


Fig1. Typical Output Characteristics

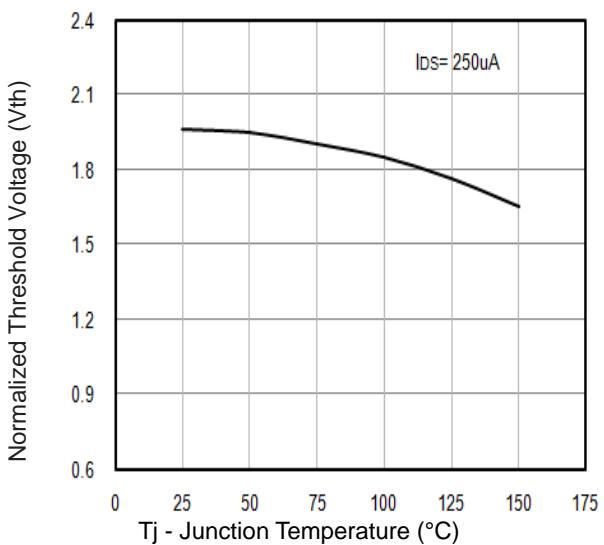


Fig2. $V_{GS(TH)}$ Gate -Source Voltage Vs. T_j

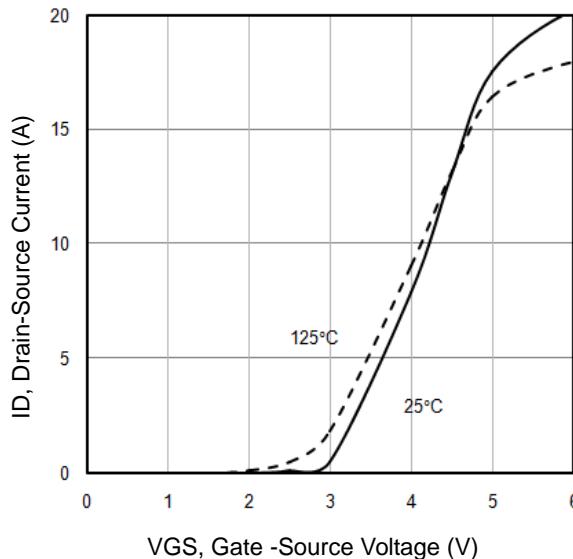


Fig3. Typical Transfer Characteristics

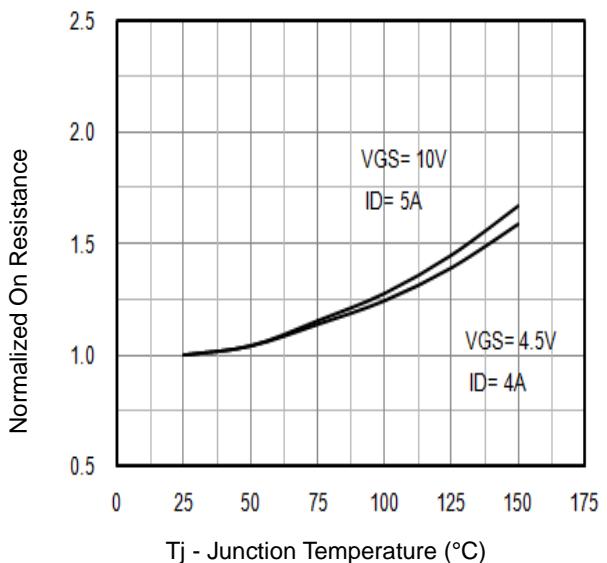


Fig4. Normalized On-Resistance Vs. T_j

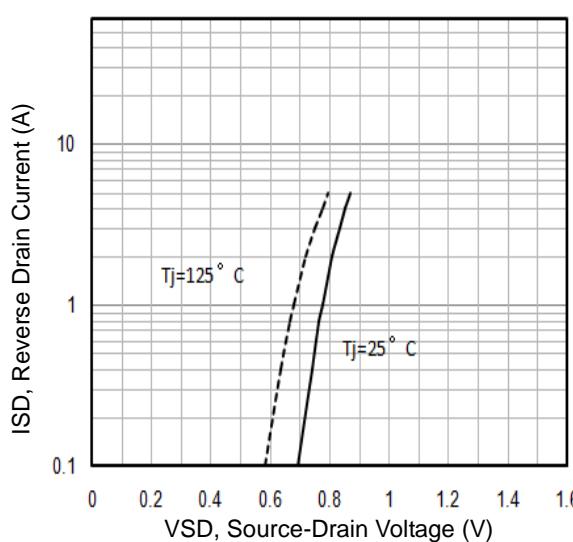


Fig5. Typical Source-Drain Diode Forward Voltage

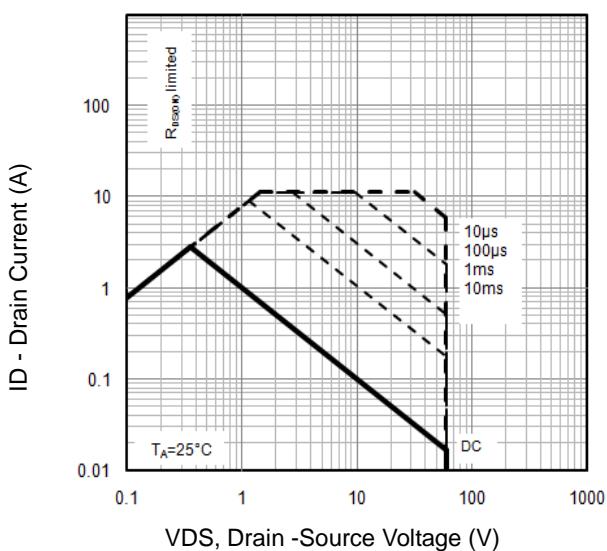


Fig6. Maximum Safe Operating Area

Typical Characteristics

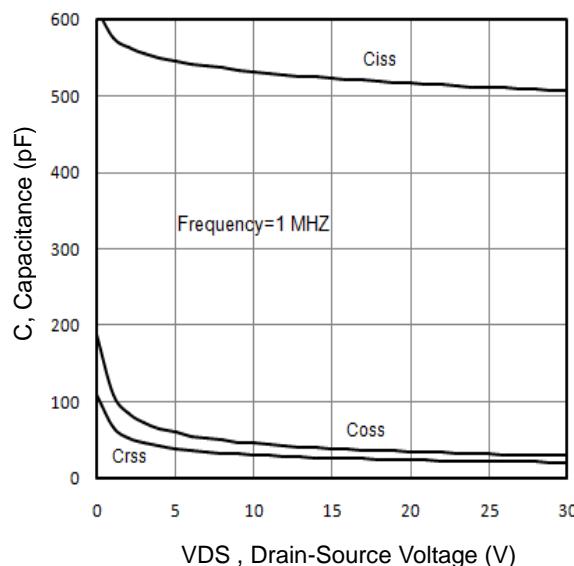


Fig7. Typical Capacitance Vs.Drain-Source Voltage

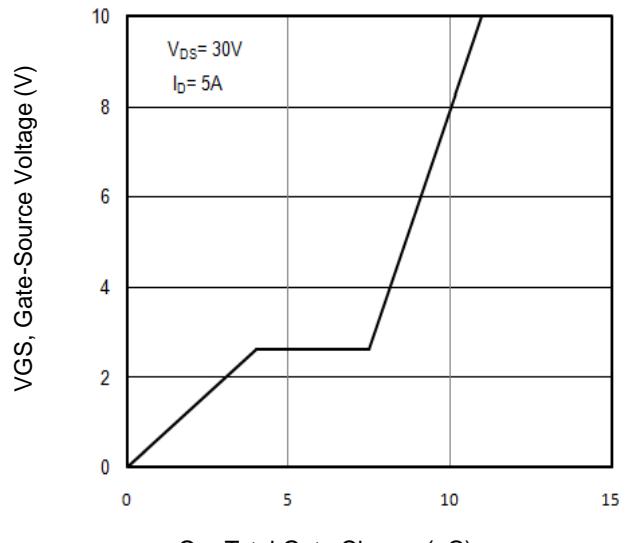


Fig8. Typical Gate Charge Vs.Gate-Source Voltage

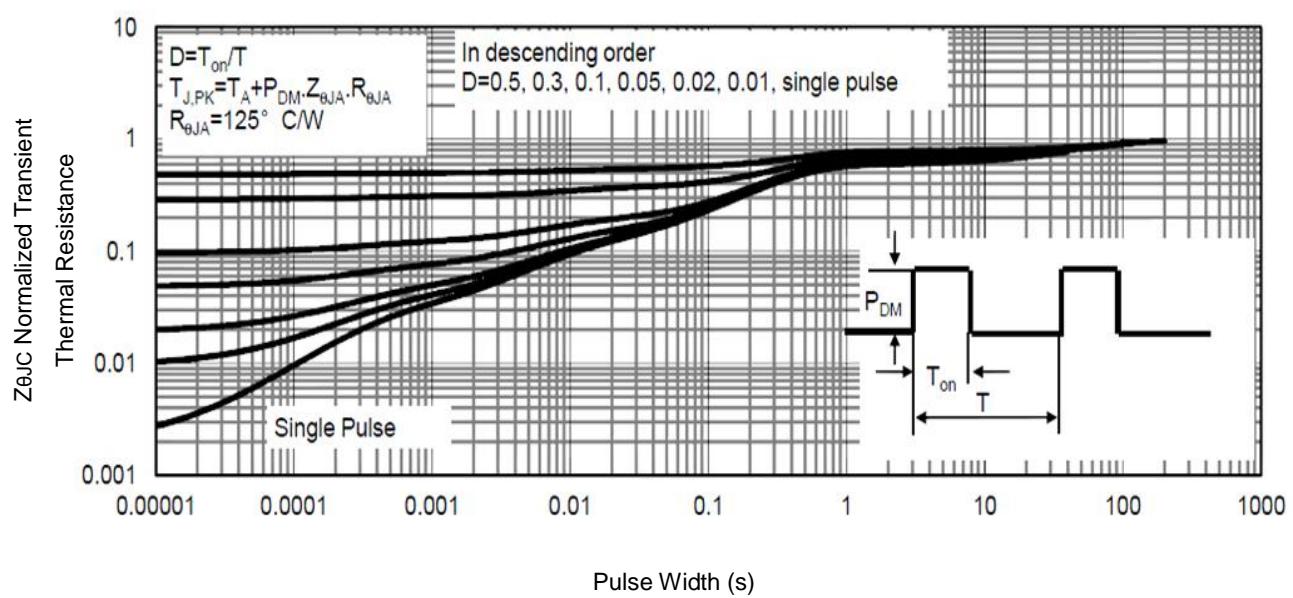


Fig9 . Normalized Maximum Transient Thermal Impedance

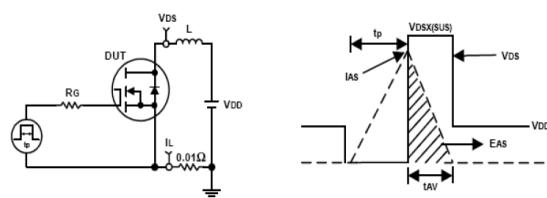


Fig10. Unclamped Inductive Test Circuit and waveforms


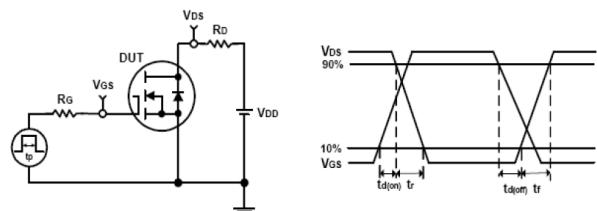


Fig11. Switching Time Test Circuit and waveforms

SOT23 Package Outline Data

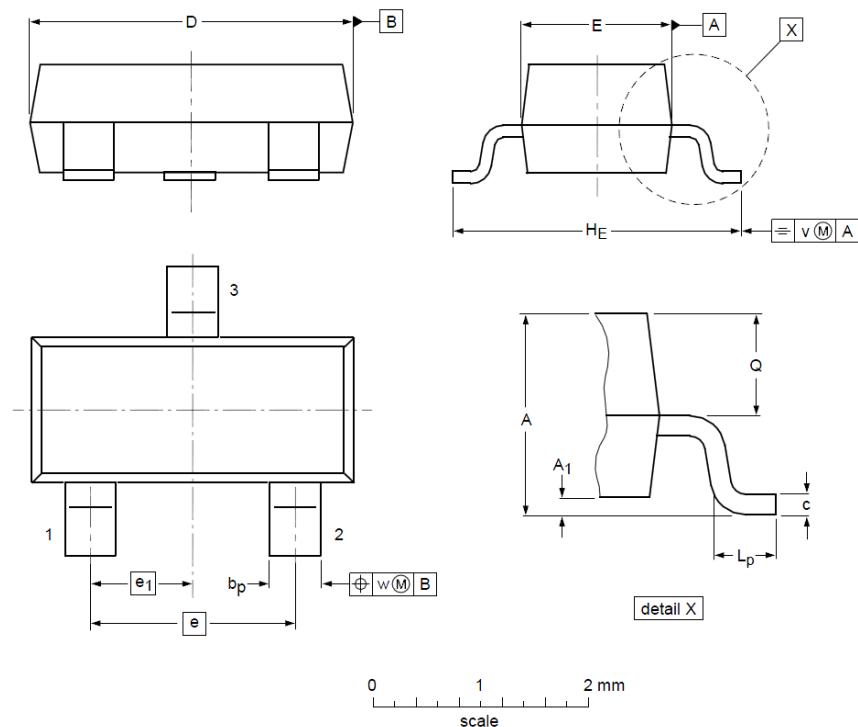

Label	DIMENSIONS (unit: mm)		
	Min	Typ	Max
A	0.90	1.03	1.10
A₁	0.01	0.05	0.10
b_p	0.38	0.42	0.48
c	0.09	0.13	0.15
D	2.80	2.92	3.00
E	1.20	1.33	1.40
e	--	1.90	--
e₁	--	0.95	--
H_E	2.10	2.40	2.50
L_p	0.40	0.50	0.60
Q	0.45	0.49	0.55
v	--	0.20	--
w	--	0.10	--

Notes:

- Follow JEDEC TO-236, variation AB.
- Dimension "D" does NOT include mold flash, protrusions or gate burrs. Mold flash, protrusions or gate burrs shall not exceed 0.25mm per side.
- Dimension "E" does NOT include interlead flash or protrusion. Interlead flash or protrusion shall not exceed 0.25mm per side.

Customer Service

Sales and Service:

sales@vgsemi.com

Vanguard Semiconductor CO., LTD

TEL: (86-755) -26902410

FAX: (86-755) -26907027

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for MOSFET category:

Click to view products by Vanguard manufacturer:

Other Similar products are found below :

[614233C](#) [648584F](#) [MCH3443-TL-E](#) [MCH6422-TL-E](#) [FDPF9N50NZ](#) [FW216A-TL-2W](#) [FW231A-TL-E](#) [APT5010JVR](#) [NTNS3A92PZT5G](#)
[IRF100S201](#) [JANTX2N5237](#) [2SK2464-TL-E](#) [2SK3818-DL-E](#) [FCA20N60_F109](#) [FDZ595PZ](#) [STD6600NT4G](#) [FSS804-TL-E](#) [2SJ277-DL-E](#)
[2SK1691-DL-E](#) [2SK2545\(Q,T\)](#) [D2294UK](#) [405094E](#) [423220D](#) [MCH6646-TL-E](#) [TPCC8103,L1Q\(CM](#) [367-8430-0972-503](#) [VN1206L](#)
[424134F](#) [026935X](#) [051075F](#) [SBVS138LT1G](#) [614234A](#) [715780A](#) [NTNS3166NZT5G](#) [751625C](#) [873612G](#) [IRF7380TRHR](#)
[IPS70R2K0CEAKMA1](#) [RJK60S3DPP-E0#T2](#) [RJK60S5DPK-M0#T0](#) [APT5010JVFR](#) [APT12031JFLL](#) [APT12040JVR](#) [DMN3404LQ-7](#)
[NTE6400](#) [JANTX2N6796U](#) [JANTX2N6784U](#) [JANTXV2N5416U4](#) [SQM110N05-06L-GE3](#) [SIHF35N60E-GE3](#)