Product Information





1/LPP 523450 S PCM W VKB 56457 201 012

52 MAX 50 ± 5 1/LPP 523450 S PCM W 34,5 MAX X VKB: 56457 201 012 1ICP6/35/51 3.7V 1000mAh / 3.7Wh MMYR Ref 3 (3x) Assembled in Indonesia VARTA Microbattery





Circuit Diagram



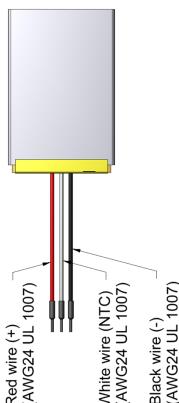







500 cycles ≥ 800mAh

CELL PROTECTION

Overcharge Detection

1. GENERAL

Configuration

Rated Capacity

Nominal Voltage

Watt-Hour Rating

Charging Method

Max. Continuous Charge Current:

Max. Continuous **Discharge Current:**

Max. Charge Voltage:

Rec. Charge Cut Off:

Rec. Discharge Cut Off:

Internal Impedance:

Expected Cycle Life @ (1C/1C) @ 23 ±5°C

Cell

PCM

NTC

Weight

ID

Battery Pack incl. safety circuit & wires

2. ELECTRICAL SPECIFICATION

Overdischarge Detection:

Overcurrent Detection

3. AMBIENT CONDITIONS

Temperature Range

 Charge Discharge

Humidity

- Storage
- ▶ 0 to +45°C -20 to +60°C
- - 1 year at -20 to +30°C >80% 3 months at -10 to +45°C >80%
 - 1 month at -20 to +60°C >80%
 - ▶ 65 ± 20%RH

4. ENVIRONMENTAL AND SAFETY

Please follow VARTA Handling and Safety Precautions for Lilon & LiPolymer. The cell used is a UL recognized component according to UL1642 and UN 38.3 certified. The cell is IEC 62133 edition 2 certified. This battery meets the requirements of Battery Directives and the battery parts are RoHS-Compliant.

Minimum Order Quantity: 600 pcs / Order Multiples: 120 pcs - Product for OEM customers only!

LPP 523450 S

10kΩ ±1%; B-value 3380K

Yes

None

1S layflat


appr. 20g

- - 4.275V ±25mV (0.7 to 1.3sec. delay, release 4.275V ±25mV)
 - 2.3V ±58mV (14 to 26msec. delay, resume 2.3V ±58mV)
 - 2A to 4.5A (8 to 16msec. delay)





5,3 MAX





X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for varta manufacturer:

Other Similar products are found below :

56456 702 099 18750 4114 210 501 4610 726 406 4122 210 511 LCD-CHARGER + 4XAA 2400MAH 449915B 4607 726 406 55171403014 55625603059 55615602940 4112101411 4 022 211 111 4 106 101 436 4 020 211 111 MINI CHARGER + 2XAA 2100MAH MINI-CHARGER 17730 LCD-SMART-CHARGER 414086X POCKET-CHARGER + 4XAA 2100MAH 458980A LCD MULTI CHARGER CG511-150-PB EE UNIVERSAL CHARGER CG401D-050-PB CG511-050-PB CU303-018-PB 413675G CG381D-G-100-PB CU202-030-PB 55615603059 CG381D-G-150-PB CG481G-050-PB CU303-030-PB CG511D-030-PB CA317-PB CU201G-B-030-PB 095668F 4600 726 406 CA418-PB CG481G-030-PB CG511D-100-PB CG511-030-PB CG511D-150-PB CG381D-G-050-PB CU302-030-PB CG341-030-PB CU201G-B-050-PB CA089-PB