
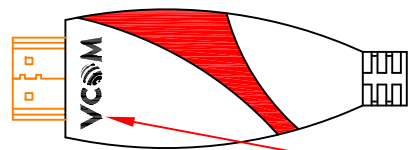



VCOM AWM 20276 80°C 30V VW-1 High Speed HDMI Cable with Ethernet 一组白色印字,印字轮编号: A641

版本	变更记录	变更日期
A/0	首次发行	2015-05-30

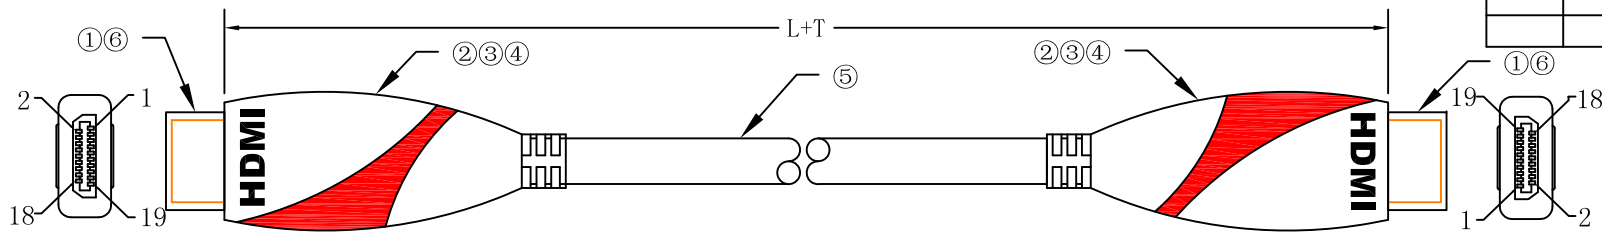

“VCOM” LOGO

WIRING DIAGRAM:

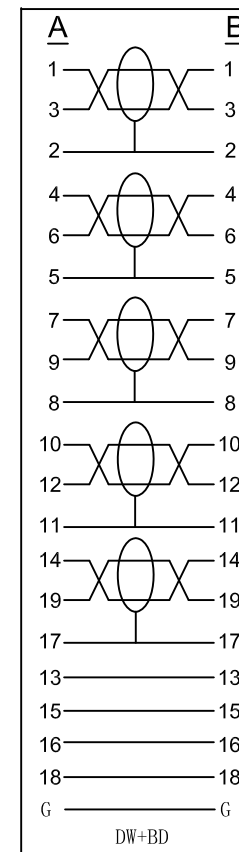

NOT: COAX

NO.	Cable length (L)	Cable tolerance (T)
1	1000MM	10MM
2	1500MM	15MM
3	1800MM	20MM
4	3000MM	30MM
5		

Test Conditions:

1. 100% open & short circuit test;
2. Insulation Resistance: 10Mohm (MIN);
3. Conduction Resistance: 5ohm (MAX) at 300V DC/0.01S .



⑥	JACKET: PVC/TRANSPARENT/ANTI-OXIDATION/50P		g		
⑤	CABLE: 30AWG (1P+DW+AL/MY) *5P+4C+AL/MY+DW+BD OD: 7.3, PVC JACKET, BLACK		M		
④	INNER MOLDING: LD PE		g		
③	OVER MOLDING: 50P PVC BLACK				
②	OVER MOLDING: 50P PVC RED		g		
①	HDMI 19PIN MALE SOLDERING TYPE GOLD PLATED, 15u		PCS		
NO.	The material content	Stock NO.	unit	quantity	Mould NO.

VCOM VCOM INTERNATIONAL LTD.

TITLE	HDMI19PM/HDMI19PM	CUSTOMER		UNIT	mm	PAGE: 1 of 1
PART NO.	VC-F14-0006-A	CUSTOMER NO.		SCALE		
PRODUCT NO.	CG525-R	REV:		A/0	DATE	2017-04-27
DRAWN BY:		CHECKED BY:		APPROVED BY:	CT	


VCOM AWM 20276 80°C 30V VW-1 High Speed HDMI Cable with Ethernet 一组白色印字,印字轮编号: A641

版本	变更记录	变更日期
A/0	首次发行	2015-04-27

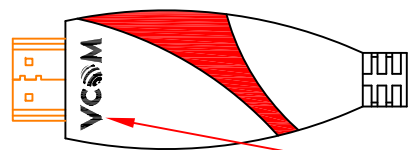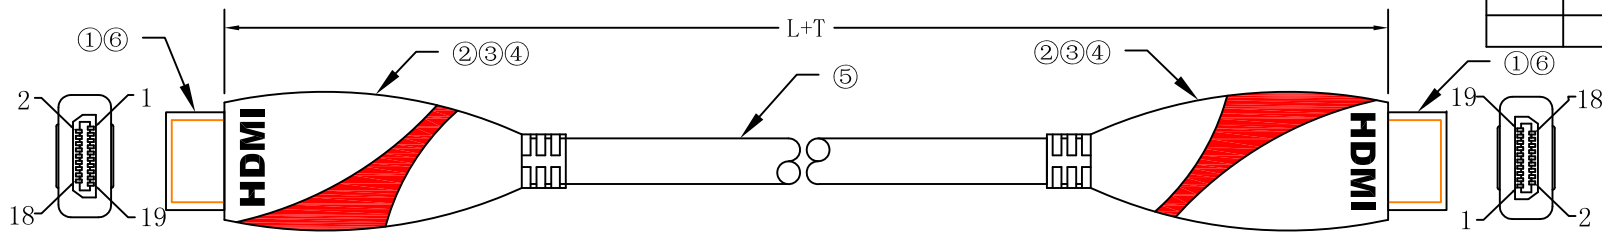

A “VCOM” LOGO B

WIRING DIAGRAM:

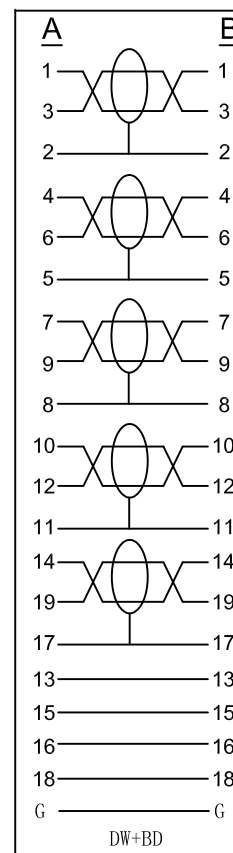

NOT: COAX

NO.	Cable length (L)	Cable tolerance (T)
1	5000MM	50MM
2	7500MM	100MM
3	10000MM	100MM
4		
5		

Test Conditions:

1. 100% open & short circuit test;
2. Insulation Resistance: 10Mohm (MIN);
3. Conduction Resistance: 5ohm (MAX) at 300V DC/0.01S .



⑥	JACKET: PVC/TRANSPARENT/ANTI-OXIDATION/50P		g		
⑤	CABLE:30AWG (1P+DW+AL/MY)*5P+4C+AL/MY+DW+BD OD:7.3, PVC JACKET, BLACK		M		
④	INNER MOLDING:LD PE		g		
③	OVER MOLDING:50P PVC BLACK				
②	OVER MOLDING:50P PVC RED		g		
①	HDMI 19PIN MALE SOLDERING TYPE GOLD PLATED, 15u		PCS		
NO.	The material content	Stock NO.	unit	quantity	Mould NO.

VCOM VCOM INTERNATIONAL LTD.

TITLE	HDMI19PM/HDMI19PM	CUSTOMER		UNIT	mm	PAGE: 1 of 1
PART NO.	VC-F14-0006-B	CUSTOMER NO.		SCALE		
PRODUCT NO.	CG525-R	REV:		A/0	DATE	2017-04-27
DRAWN BY:		CHECKED BY:		APPROVED BY:	CT	

VCOM AWM 20276 80°C 30V VW-1 High Speed HDMI Cable with Ethernet 一组白色印字,印字轮编号: A641


版本	变更记录	变更日期
A/0	首次发行	2015-04-27

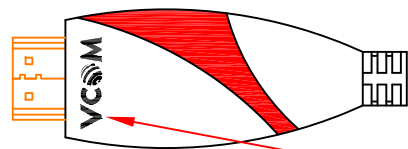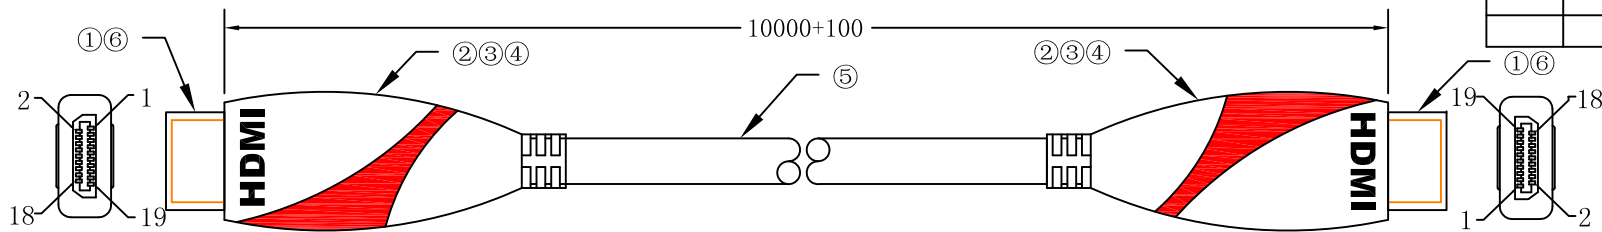

A "VCOM" LOGO

B

WIRING DIAGRAM:

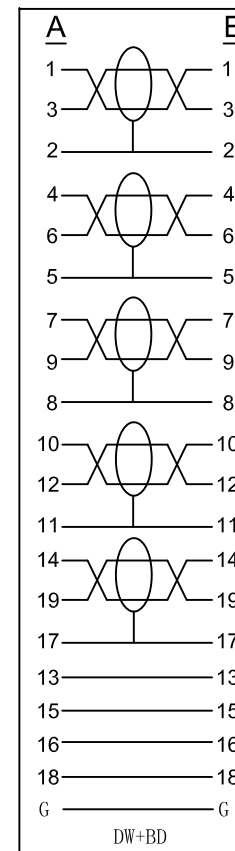

NOT: COAX

Test Conditions:

1. 100% open & short circuit test;
2. Insulation Resistance: 10Mohm (MIN);
3. Conduction Resistance: 5ohm (MAX) at 300V DC/0.01S .



⑥	JACKET: PVC/TRANSPARENT/ANTI-OXIDATION/50P		g		
⑤	CABLE: 28AWG (1P+DW+AL/MY) *5P+4C+AL/MY+DW+BD OD: 7. 3, PVC JACKET, BLACK		M		
④	INNER MOLDING: LD PE		g		
③	OVER MOLDING: 50P PVC BLACK				
②	OVER MOLDING: 50P PVC RED		g		
①	HDMI 19PIN MALE SOLDERING TYPE GOLD PLATED, 15u		PCS		
NO.	The material content	Stock NO.	unit	quantity	Mould NO.

VCOM VCOM INTERNATIONAL LTD.

TITLE	HDMI19PM/HDMI19PM	CUSTOMER		UNIT	mm	PAGE: 1 of 1
PART NO.	VC-F14-0006-C	CUSTOMER NO.		SCALE		
PRODUCT NO.	CG525-R	REV:		A/0	DATE	2017-04-27
DRAWN BY:		CHECKED BY:		APPROVED BY: CT		

VCOM AWM 20276 80°C 30V VW-1 High Speed HDMI Cable with Ethernet 一组白色印字,印字轮编号: A641


版本	变更记录	变更日期
A/0	首次发行	2015-04-27

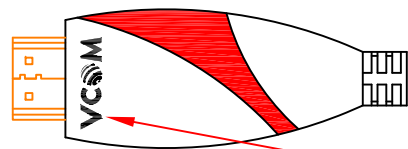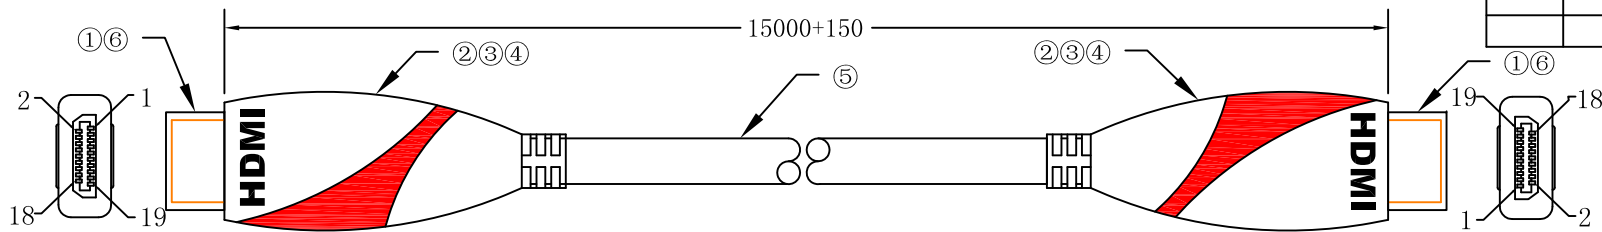

A “VCOM” LOGO

B

WIRING DIAGRAM:

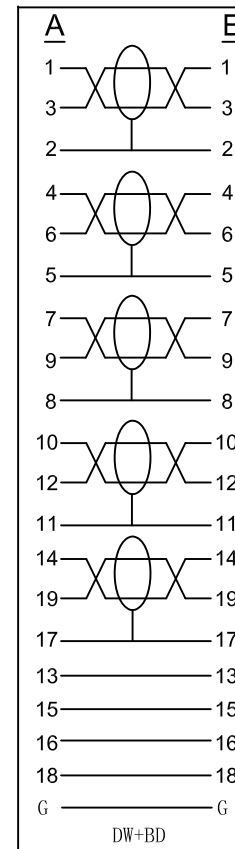

NOTE: COAXIAL

Test Conditions:

1. 100% open & short circuit test;
2. Insulation Resistance: 10Mohm (MIN);
3. Conduction Resistance: 5ohm (MAX) at 300V DC/0.01S .



⑥	JACKET: PVC/TRANSPARENT/ANTI-OXIDATION/50P		g		
⑤	CABLE: 26AWG (1P+DW+AL/MY) *5P+4C+AL/MY+DW+BD OD: 8.0, PVC JACKET, BLACK		M		
④	INNER MOLDING: LD PE		g		
③	OVER MOLDING: 50P PVC BLACK				
②	OVER MOLDING: 50P PVC RED		g		
①	HDMI 19PIN MALE SOLDERING TYPE GOLD PLATED, 15u		PCS		
NO.	The material content	Stock NO.	unit	quantity	Mould NO.

VCOM VCOM INTERNATIONAL LTD.

TITLE	HDMI19PM/HDMI19PM	CUSTOMER		UNIT	mm	PAGE: 1 of 1
PART NO.	VC-F14-0006-D	CUSTOMER NO.		SCALE		
PRODUCT NO.	CG525-R	REV:		A/0	DATE	2017-04-27
DRAWN BY:		CHECKED BY:		APPROVED BY: CT		

VCOM AWM 20276 80°C 30V VW-1 High Speed HDMI Cable with Ethernet 一组白色印字,印字轮编号: A641


版本	变更记录	变更日期
A/0	首次发行	2015-04-27

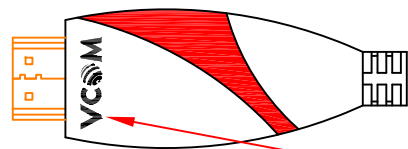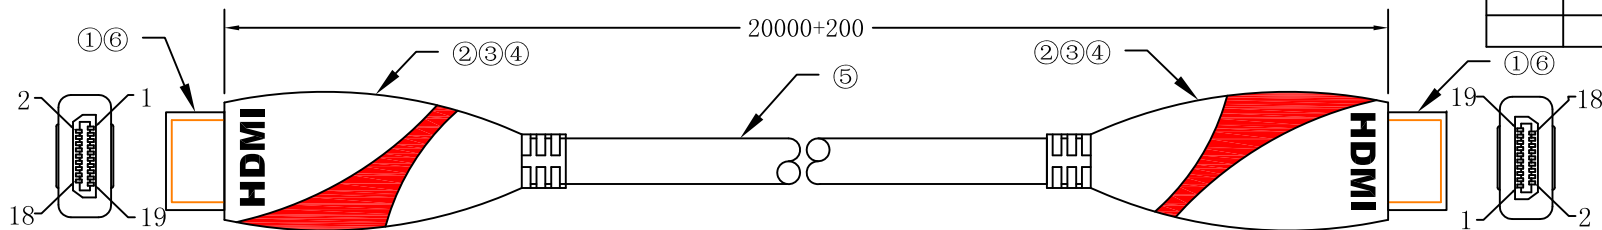

A "VCOM" LOGO

B

WIRING DIAGRAM:

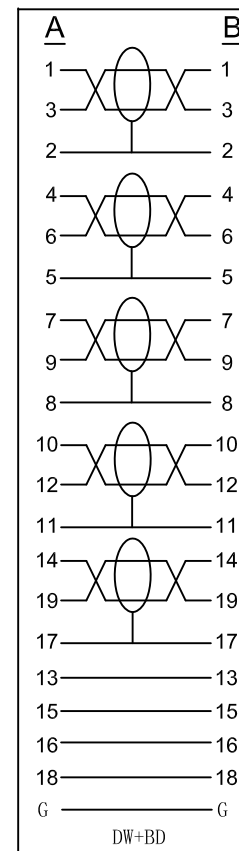

NOT: COAX

Test Conditions:

1. 100% open & short circuit test;
2. Insulation Resistance: 10Mohm (MIN);
3. Conduction Resistance: 5ohm (MAX) at 300V DC/0.01S .

⑥	JACKET: PVC/TRANSPARENT/ANTI-OXIDATION/50P		g		
⑤	CABLE: 24AWG (1P+DW+AL/MY) *5P+4C+AL/MY+DW+BD OD: 9. 0, PVC JACKET, BLACK		M		
④	INNER MOLDING: LD PE		g		
③	OVER MOLDING: 50P PVC BLACK				
②	OVER MOLDING: 50P PVC RED		g		
①	HDMI 19PIN MALE SOLDERING TYPE GOLD PLATED, 15u		PCS		
NO.	The material content	Stock NO.	unit	quantity	Mould NO.

VCOM VCOM INTERNATIONAL LTD.

TITLE	HDMI19PM/HDMI19PM	CUSTOMER		UNIT	mm	PAGE: 1 of 1
PART NO.	VC-F14-0006-E	CUSTOMER NO.		SCALE		
PRODUCT NO.	CG525-R	REV:		A/0	DATE	2017-04-27
DRAWN BY:		CHECKED BY:		APPROVED BY: CT		

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [HDMI, Displayport & DVI Connectors](#) category:

Click to view products by [VCOM](#) manufacturer:

Other Similar products are found below :

[30-528](#) [30-504](#) [33DVIR-24S1B](#) [47648-2000](#) [TC142X](#) [HAGBH](#) [AABII](#) [AAIBG](#) [AAIBH](#) [AANBG](#) [52355](#) [XHLJQ-00026](#) [HDMI-019R](#)
[G46M2013201AWEU](#) [ST-0277D00-052-142](#) [PJ-399M](#) [PJ-615-5A](#) [HDMI-S-125-D](#) [PJ-359](#) [PJ-3850-5A](#) [PJ-3250D-5A](#) [KH-PJ-359](#) [HDMI-](#)
[005-ARSW-L116](#) [58490](#) [DS-45404](#) [HD0039](#) [60616](#) [AAMBJ](#) [61275](#) [61297](#) [KABHD](#) [OEM-40](#) [61293](#) [DS-45316](#) [50355](#) [AK-330115-010-S](#)
[AK-330101-002-S](#) [AHCBI](#) [AK-330127-300-S](#) [CG526-B-3.0](#) [64866](#) [CG525-R-1.8](#) [61296](#) [CG865-3](#) [CG517-3.0](#) [EAEBD](#) [65262](#) [DB-340305-](#)
[018-S](#) [DS-55521](#) [ALGLI](#) [KABHD](#) [OEM-35](#)