
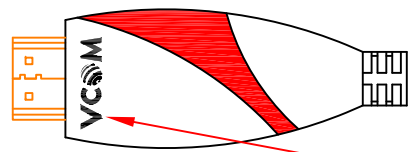



VCOM AWM 20276 80°C 30V VW-1 High Speed HDMI Cable with Ethernet 一组白色印字,印字轮编号: A641

| | | |
|-----|------|------------|
| 版本 | 变更记录 | 变更日期 |
| A/0 | 首次发行 | 2015-05-30 |
| | | |

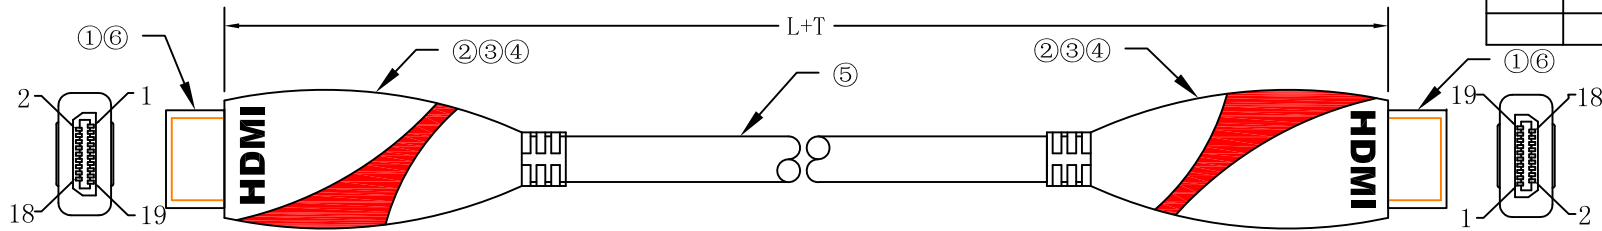

“VCOM” LOGO

WIRING DIAGRAM:

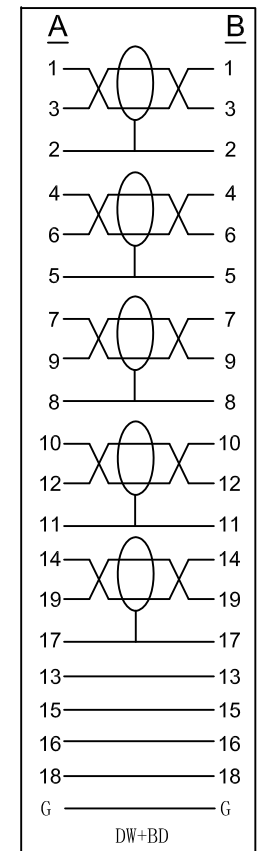

| NO. | Cable length (L) | Cable tolerance (T) |
|-----|------------------|---------------------|
| 1 | 1000MM | 10MM |
| 2 | 1500MM | 15MM |
| 3 | 1800MM | 20MM |
| 4 | 3000MM | 30MM |
| 5 | | |

Test Conditions:

1. 100% open & short circuit test;
2. Insulation Resistance: 10Mohm (MIN);
3. Conduction Resistance: 5ohm (MAX) at 300V DC/0.01S .



| | | | | | |
|-----|--|-----------|------|----------|-----------|
| ⑥ | JACKET: PVC/TRANSPARENT/ANTI-OXIDATION/50P | | g | | |
| ⑤ | CABLE: 30AWG (1P+DW+AL/MY) *5P+4C+AL/MY+DW+BD OD: 7.3, PVC JACKET, BLACK | | M | | |
| ④ | INNER MOLDING: LD PE | | g | | |
| ③ | OVER MOLDING: 50P PVC BLACK | | | | |
| ② | OVER MOLDING: 50P PVC RED | | g | | |
| ① | HDMI 19PIN MALE SOLDERING TYPE GOLD PLATED, 15u | | PCS | | |
| NO. | The material content | Stock NO. | unit | quantity | Mould NO. |

VCOM VCOM INTERNATIONAL LTD.

| | | | | | | |
|-------------|-------------------|--------------|--|-----------------|------|--------------|
| TITLE | HDMI19PM/HDMI19PM | CUSTOMER | | UNIT | mm | PAGE: 1 of 1 |
| PART NO. | VC-F14-0006-A | CUSTOMER NO. | | SCALE | | |
| PRODUCT NO. | CG525-R | REV: | | A/0 | DATE | 2017-04-27 |
| DRAWN BY: | | CHECKED BY: | | APPROVED BY: CT | | |


VCOM AWM 20276 80°C 30V VW-1 High Speed HDMI Cable with Ethernet 一组白色印字,印字轮编号: A641

| | | |
|-----|------|------------|
| 版本 | 变更记录 | 变更日期 |
| A/0 | 首次发行 | 2015-04-27 |
| | | |

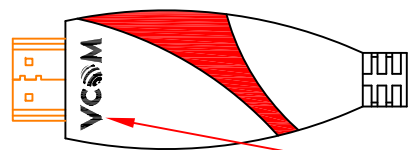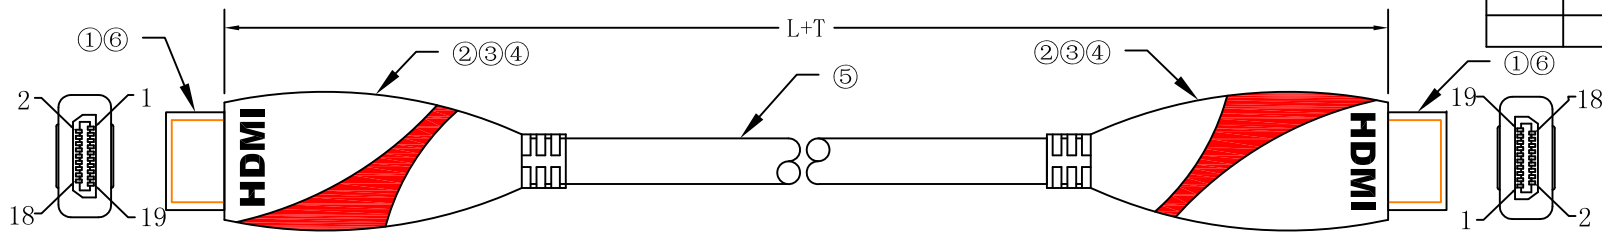

A "VCOM" LOGO B

WIRING DIAGRAM:

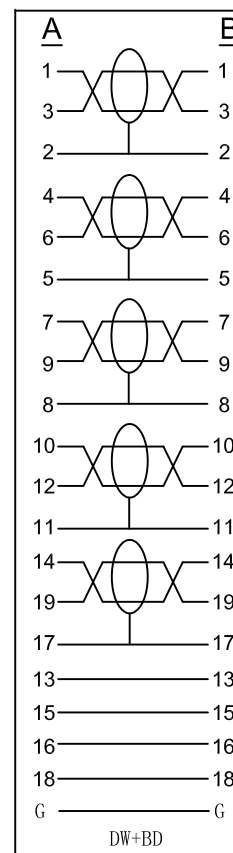

NOT: COAX

| NO. | Cable length (L) | Cable tolerance (T) |
|-----|------------------|---------------------|
| 1 | 5000MM | 50MM |
| 2 | 7500MM | 100MM |
| 3 | 10000MM | 100MM |
| 4 | | |
| 5 | | |

Test Conditions:

1. 100% open & short circuit test;
2. Insulation Resistance: 10Mohm (MIN);
3. Conduction Resistance: 5ohm (MAX) at 300V DC/0.01S .



| | | | | | |
|-----|--|-----------|------|----------|-----------|
| ⑥ | JACKET: PVC/TRANSPARENT/ANTI-OXIDATION/50P | | g | | |
| ⑤ | CABLE: 30AWG (1P+DW+AL/MY) *5P+4C+AL/MY+DW+BD OD: 7.3, PVC JACKET, BLACK | | M | | |
| ④ | INNER MOLDING: LD PE | | g | | |
| ③ | OVER MOLDING: 50P PVC BLACK | | | | |
| ② | OVER MOLDING: 50P PVC RED | | g | | |
| ① | HDMI 19PIN MALE SOLDERING TYPE GOLD PLATED, 15u | | PCS | | |
| NO. | The material content | Stock NO. | unit | quantity | Mould NO. |

VCOM VCOM INTERNATIONAL LTD.

| | | | | | | |
|-------------|-------------------|--------------|--|-----------------|------|--------------|
| TITLE | HDMI19PM/HDMI19PM | CUSTOMER | | UNIT | mm | PAGE: 1 of 1 |
| PART NO. | VC-F14-0006-B | CUSTOMER NO. | | SCALE | | |
| PRODUCT NO. | CG525-R | REV: | | A/0 | DATE | 2017-04-27 |
| DRAWN BY: | | CHECKED BY: | | APPROVED BY: CT | | |

VCOM AWM 20276 80°C 30V VW-1 High Speed HDMI Cable with Ethernet 一组白色印字,印字轮编号: A641


| | | |
|-----|------|------------|
| 版本 | 变更记录 | 变更日期 |
| A/0 | 首次发行 | 2015-04-27 |
| | | |

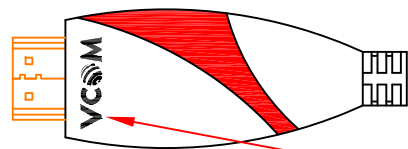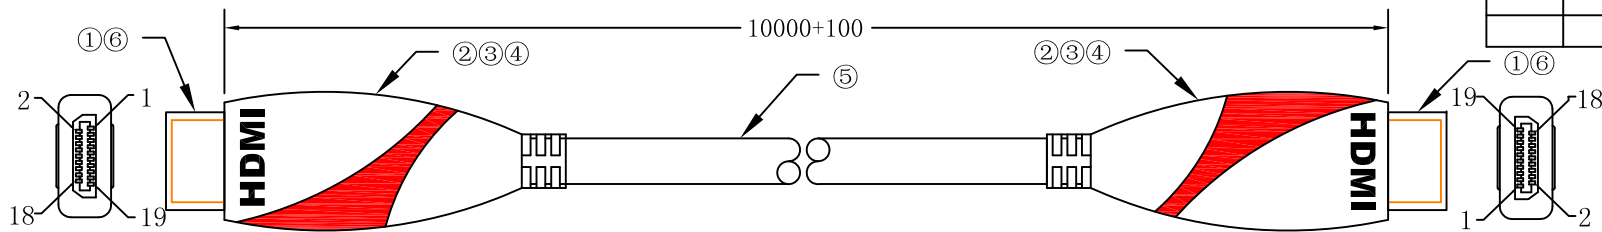

A “VCOM” LOGO

B

WIRING DIAGRAM:

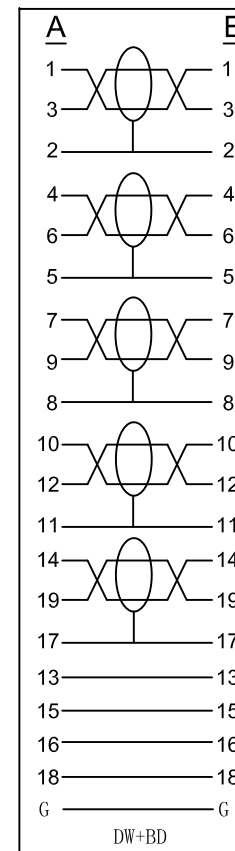

NOT: COAX

Test Conditions:

1. 100% open & short circuit test;
2. Insulation Resistance: 10Mohm (MIN);
3. Conduction Resistance: 5ohm (MAX) at 300V DC/0.01S .

| | | | | | |
|-----|---|-----------|------|----------|-----------|
| ⑥ | JACKET: PVC/TRANSPARENT/ANTI-OXIDATION/50P | | g | | |
| ⑤ | CABLE: 28AWG (1P+DW+AL/MY) *5P+4C+AL/MY+DW+BD OD: 7. 3, PVC JACKET, BLACK | | M | | |
| ④ | INNER MOLDING: LD PE | | g | | |
| ③ | OVER MOLDING: 50P PVC BLACK | | | | |
| ② | OVER MOLDING: 50P PVC RED | | g | | |
| ① | HDMI 19PIN MALE SOLDERING TYPE GOLD PLATED, 15u | | PCS | | |
| NO. | The material content | Stock NO. | unit | quantity | Mould NO. |

VCOM VCOM INTERNATIONAL LTD.

| | | | | | | |
|-------------|-------------------|--------------|--|-----------------|------|--------------|
| TITLE | HDMI19PM/HDMI19PM | CUSTOMER | | UNIT | mm | PAGE: 1 of 1 |
| PART NO. | VC-F14-0006-C | CUSTOMER NO. | | SCALE | | |
| PRODUCT NO. | CG525-R | REV: | | A/0 | DATE | 2017-04-27 |
| DRAWN BY: | | CHECKED BY: | | APPROVED BY: CT | | |

5

4


3

2

1


VCOM AWM 20276 80°C 30V VW-1 High Speed HDMI Cable with Ethernet 一组白色印字,印字轮编号: A641

| | | |
|-----|------|------------|
| 版本 | 变更记录 | 变更日期 |
| A/0 | 首次发行 | 2015-04-27 |
| | | |

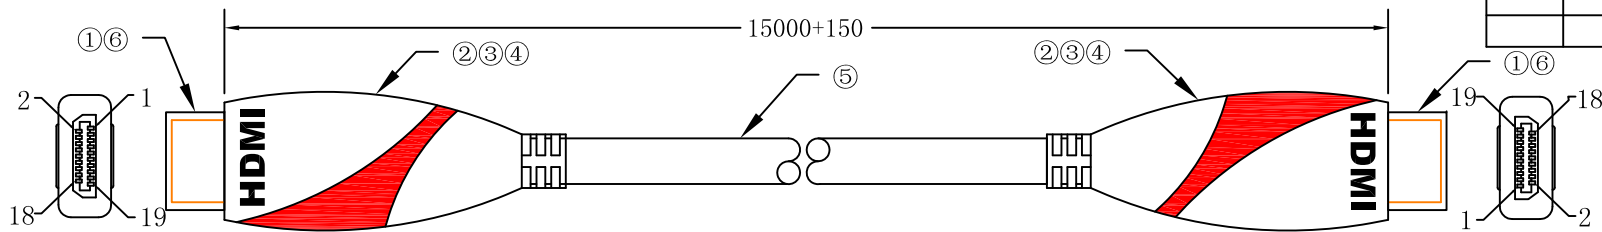

“VCOM” LOGO

WIRING DIAGRAM:

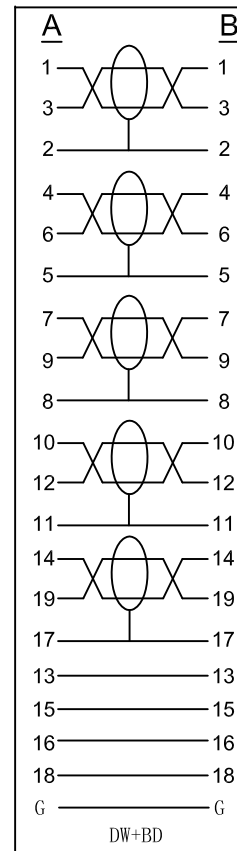

Test Conditions:

1. 100% open & short circuit test;
2. Insulation Resistance: 10Mohm (MIN);
3. Conduction Resistance: 5ohm (MAX) at 300V DC/0.01S .

NOT COAX



| | | | | | |
|-----|---|-----------|------|----------|-----------|
| ⑥ | JACKET: PVC/TRANSPARENT/ANTI-OXIDATION/50P | | g | | |
| ⑤ | CABLE: 26AWG (1P+DW+AL/MY) *5P+4C+AL/MY+DW+BD OD: 8. 0, PVC JACKET, BLACK | | M | | |
| ④ | INNER MOLDING: LD PE | | g | | |
| ③ | OVER MOLDING: 50P PVC BLACK | | | | |
| ② | OVER MOLDING: 50P PVC RED | | g | | |
| ① | HDMI 19PIN MALE SOLDERING TYPE GOLD PLATED, 15u | | PCS | | |
| NO. | The material content | Stock NO. | unit | quantity | Mould NO. |

VCOM VCOM INTERNATIONAL LTD.

| | | | | | | |
|-------------|-------------------|--------------|--|-----------------|------|--------------|
| TITLE | HDMI19PM/HDMI19PM | CUSTOMER | | UNIT | mm | PAGE: 1 of 1 |
| PART NO. | VC-F14-0006-D | CUSTOMER NO. | | SCALE | | |
| PRODUCT NO. | CG525-R | REV: | | A/0 | DATE | 2017-04-27 |
| DRAWN BY: | | CHECKED BY: | | APPROVED BY: CT | | |

VCOM AWM 20276 80°C 30V VW-1 High Speed HDMI Cable with Ethernet 一组白色印字,印字轮编号: A641


| | | |
|-----|------|------------|
| 版本 | 变更记录 | 变更日期 |
| A/0 | 首次发行 | 2015-04-27 |
| | | |
| | | |

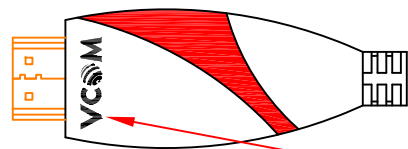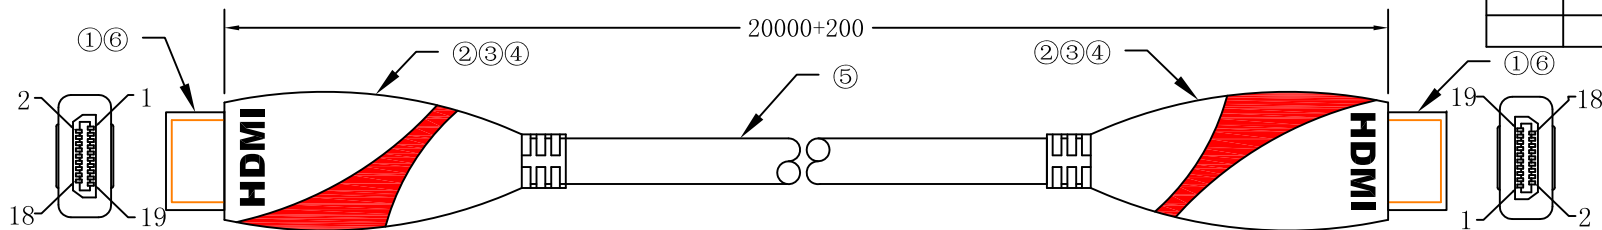

A “VCOM” LOGO

B

WIRING DIAGRAM:

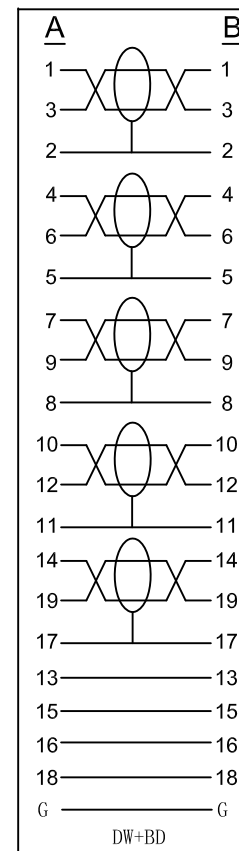

Test Conditions:

1. 100% open & short circuit test;
2. Insulation Resistance: 10Mohm (MIN);
3. Conduction Resistance: 5ohm (MAX) at 300V DC/0.01S .

| | | | | | |
|-----|---|-----------|------|----------|-----------|
| ⑥ | JACKET: PVC/TRANSPARENT/ANTI-OXIDATION/50P | | g | | |
| ⑤ | CABLE: 24AWG (1P+DW+AL/MY) *5P+4C+AL/MY+DW+BD OD: 9. 0, PVC JACKET, BLACK | | M | | |
| ④ | INNER MOLDING: LD PE | | g | | |
| ③ | OVER MOLDING: 50P PVC BLACK | | | | |
| ② | OVER MOLDING: 50P PVC RED | | g | | |
| ① | HDMI 19PIN MALE SOLDERING TYPE GOLD PLATED, 15u | | PCS | | |
| NO. | The material content | Stock NO. | unit | quantity | Mould NO. |

VCOM VCOM INTERNATIONAL LTD.

| | | | | | | |
|-------------|-------------------|--------------|--|-----------------|------|--------------|
| TITLE | HDMI19PM/HDMI19PM | CUSTOMER | | UNIT | mm | PAGE: 1 of 1 |
| PART NO. | VC-F14-0006-E | CUSTOMER NO. | | SCALE | | |
| PRODUCT NO. | CG525-R | REV: | | A/0 | DATE | 2017-04-27 |
| DRAWN BY: | | CHECKED BY: | | APPROVED BY: CT | | |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [HDMI, Displayport & DVI Connectors](#) category:

Click to view products by [VCOM](#) manufacturer:

Other Similar products are found below :

[30-528](#) [30-504](#) [33DVIR-24S1B](#) [47648-2000](#) [TC142X](#) [HAGBH](#) [AABII](#) [AAIBG](#) [AAIBH](#) [AANBG](#) [52355](#) [XHLJQ-00026](#) [HDMI-019R](#)
[G46M2013201AWEU](#) [ST-0277D00-052-142](#) [PJ-399M](#) [PJ-615-5A](#) [HDMI-S-125-D](#) [PJ-359](#) [PJ-3850-5A](#) [PJ-3250D-5A](#) [KH-PJ-359](#) [58490](#)
[DS-45404](#) [60907](#) [60616](#) [AAMBJ](#) [61275](#) [61161](#) [61297](#) [KABHD](#) [OEM-40](#) [61293](#) [61304](#) [DS-45316](#) [50355](#) [AK-330115-010-S](#) [AK-330101-](#)
[002-S](#) [AHCBI](#) [AK-330127-300-S](#) [AAGBH](#) [CG526-B-3.0](#) [64866](#) [CG525-R-1.8](#) [61296](#) [CG865-3](#) [CG517-3.0](#) [EAEBD](#) [65262](#) [CG862-1.5](#)
[AK-340103-050-S](#)