

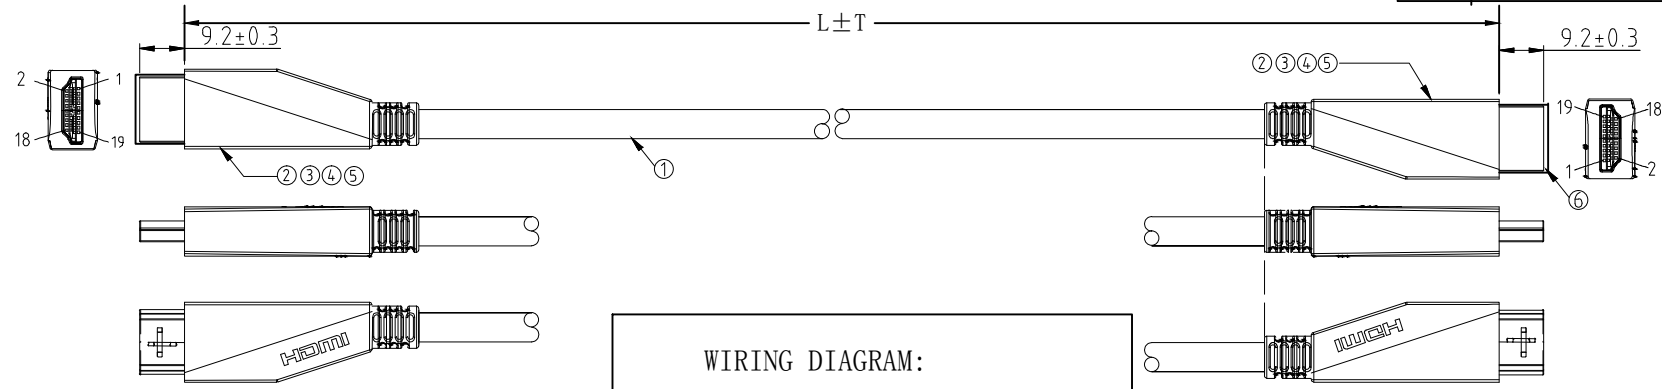


REV	Change record	Change the date
A/0	Initial issue	2020-07-13

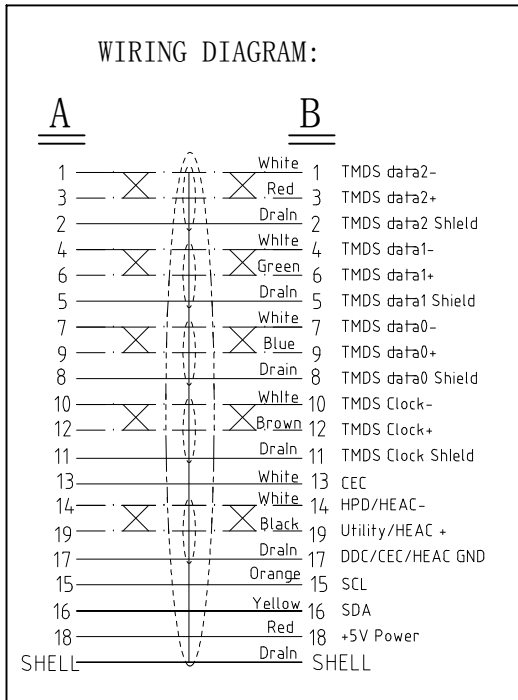

A

WIRE DIAGRAM



B

NO.	Cable length (L)	Cable Tolerance (T)
1	1500mm	20mm
2	1800mm	20mm
3	3000mm	30mm

- Test Conditions:
- 100% open & short circuit test;
  - Insulation Resistance: 10Mohm (MIN);
  - Conduction Resistance: 5ohm (MAX) at 300V DC/0.01S .
  - Test requirement: 4K(3840\*2160)@60Hz

⑥	PROTECTIVE CASE: PE (polyethylene)	PCS	2
⑤	SHELL: ZINC ALLOY SHELL, SILVER	PCS	2
④	OVER MOLDING: 45P PVC (Polyvinyl chloride), BLACK	g	N/A
③	INNER MOLDING: LD PE (polyethylene)	g	N/A
②	CONN: HDMI 19PIN MALE SOLDERING TYPE GOLD PLATED, INSULATION: RED	PCS	2
①	CABLE: HDMI 2.0V (1P+DW+AL/MY) *5P+4C+ADB OD: 7.3, PVC JACKET, BLACK	mm	L
NO.	The material content	unit	quantity

**VCOM** VCOM INTERNATIONAL LTD.

TITLE	HDMI A/M to A/M, 2.0V	CUSTOMER	EUE	UNIT	mm	PAGE: 1 of 1
PART NO.	AC-137	CUSTOMER NO.		SCALE		
PRODUCT NO.	CG577	REV:	A/0	DATE	2020-07-13	
APPROVED BY: XGS	CHECKED BY:	DRAWN BY: CT				

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [HDMI, Displayport & DVI Connectors](#) category:*

*Click to view products by [VCOM](#) manufacturer:*

Other Similar products are found below :

[30-528](#) [30-504](#) [33DVIR-24S1B](#) [47648-2000](#) [TC142X](#) [HAGBH](#) [AABII](#) [AAIBG](#) [AAIBH](#) [AANBG](#) [52355](#) [XHLJQ-00026](#) [HDMI-019R](#)  
[G46M2013201AWEU](#) [ST-0277D00-052-142](#) [PJ-399M](#) [PJ-615-5A](#) [HDMI-S-125-D](#) [PJ-359](#) [PJ-3850-5A](#) [PJ-3250D-5A](#) [KH-PJ-359](#) [58490](#)  
[DS-45404](#) [60907](#) [60616](#) [AAMBJ](#) [61275](#) [61161](#) [61297](#) [KABHD](#) [OEM-40](#) [61293](#) [61304](#) [DS-45316](#) [50355](#) [AK-330115-010-S](#) [AK-330101-](#)  
[002-S](#) [AHCBI](#) [AK-330127-300-S](#) [AAGBH](#) [CG526-B-3.0](#) [64866](#) [CG525-R-1.8](#) [61296](#) [CG865-3](#) [CG517-3.0](#) [EAEBD](#) [65262](#) [CG862-1.5](#)  
[AK-340103-050-S](#)