


### 8801-6

**Circuit Pattern:**  
**Contacts:**  
**Width/Thick:**  
**Height:**  
**16-Pin DIP Capacity:**  
**Material:**  
**V/G Terminals:**  
**Socket Pins:**  
**Solder Connector:**  
**Extender:**  
**Rec. Card Cage:**  
**Wire-Wrap Connector:**  
**Hole Diameter:**

### S-100

Pad-Per-Hole  
 50/100 @ .125" Ctrs  
 Ni/Gold  
 5.3"/.062"  
 10.0"  
 80  
 FR4 Epoxy Glass  
 T44, T46, T49, T68  
 R32  
 R681-3  
 3690-12  
 Series 100  
 R681-2  
 .042"

- 0.042" diameter plated-thru holes on 0.1" grid
- I/O mounting area for ribbon cable connectors
- Layout paper and instructions included
- Row and column legends provided

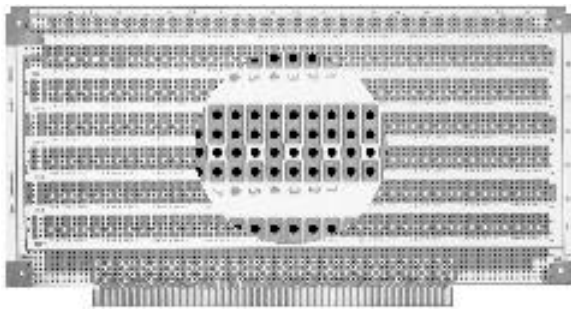

### 8804


**Circuit Pattern:**  
**Contacts:**  
**Width/Thick:**  
**Height:**  
**Material:**  
**V/G Terminals:**  
**Socket Pins:**  
**Solder Connector:**  
**Extender:**  
**Rec. Card Cage:**  
**Wire-Wrap Connector:**  
**Hole Diameter:**

### S-100

Voltage/Ground Plane  
 50/100 @ .125" Ctrs  
 Ni/Gold  
 5.3"/.062"  
 10.0"  
 CEM-1  
 T44, T46, T49, T68  
 R32  
 R681-3  
 3690-12  
 Series 100  
 R681-2  
 .042"

- 0.085" diameter clearance area around holes, both sides
- Layout paper and instructions included
- components, and test fixtures
- Row and column legends provided
- Zig-Zag buses: pins, terminals, or wires contact either voltage of ground at each hole along bus lines

Other Buses

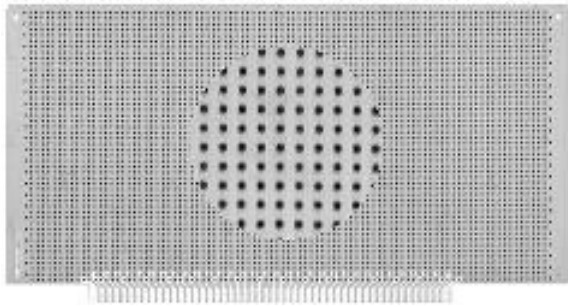



### 8801-1

**Circuit Pattern:**  
**Contacts:**  
**Width/Thick:**  
**Height:**  
**16-Pin DIP Capacity:**  
**Material:**  
**V/G Terminals:**  
**Socket Pins:**  
**Solder Connector:**  
**Extender:**  
**Rec. Card Cage:**  
**Wire-Wrap Connector:**  
**Hole Diameter:**

### S-100


Contacts Only  
 50/100 @ .125" Ctrs  
 Ni/Gold  
 5.3"/.062"  
 10.0"  
 110  
 CEM-1  
 T44, T46, T49, T68  
 R32  
 R681-3  
 3690-12  
 Series 100  
 R681-2  
 .042"

- Unrestricted component placement
- Layout paper and instructions included
- Row and column legends provided

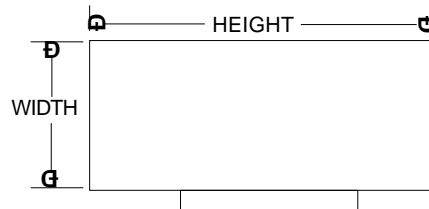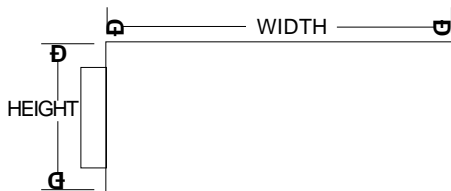


**S-100 Extenders 3690-12**

**Length:** 7.5" (190.5mm)  
**Connector:** High reliability, gold-plated (mounted)  
**Contacts:** 50/100  
**Current Rating:** 5 amps at 10° F. rise  
**Voltage Rating:** 200 RMS or 300 VDC  
**Material:** FR4 Epoxy Glass, 2 oz. Cu.

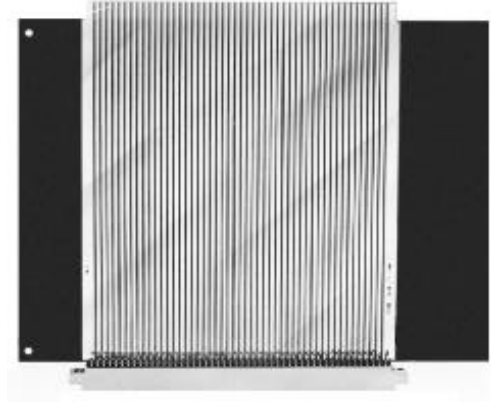**Multibus Extender 3690-18**

**Length:** 7.5" (190.5mm)  
**Height:** 12" (304.8mm)  
**Connector:** Gold-plated. Mounted on top and connected to circuit traces  
**Current Rating:** 5 amps at 10° F. rise  
**Voltage Rating:** 200 RMS or 300 VDC  
**Material:** FR4 Epoxy Glass, 2 oz. Cu.

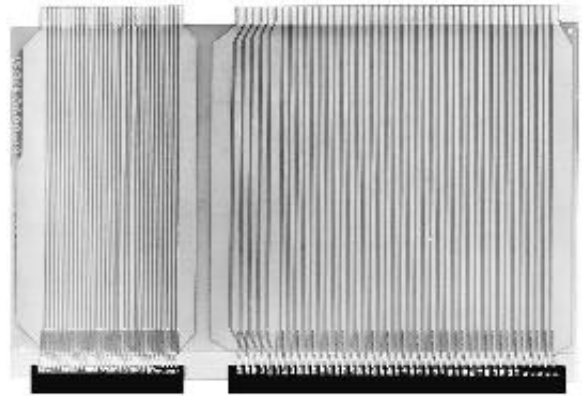

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [PCI Express/PCI Connectors](#) category:*

*Click to view products by [Vector](#) manufacturer:*

Other Similar products are found below :

[UEX220-6U](#) [10039755-10110TLF](#) [1-1871239-2](#) [2170560-2](#) [10125756-980000LF](#) [EB220-3U](#) [10061913-120PLF](#) [GPCP146400111HR](#)  
[205058-1001](#) [GPCP442628110HR](#) [GPCP446200120HR](#) [GPCP245400111HR](#) [10082378-10000TLF](#) [87715-9256](#) [MDT580M03001](#)  
[0877159107](#) [MDT580M01001](#) [10018783-11000MLF](#) [10018783-11101TLF](#) [10108777-10000ALF](#) [10141523-111T0LF](#) [10145445-10003MLF](#)  
[PSASF2130311TR](#) [PSASF3130411TR](#) [PSASF3130131TR](#) [7-1734774-7](#) [3-1761465-1](#) [10018784-10111TLF](#) [10039755-10111TLF](#) [10039755-](#)  
[10112TLF](#) [10018783-10211TLF](#) [10018784-10211TLF](#) [10018784-10212TLF](#) [1761465-2](#) [1871058-1](#) [5-1761465-4](#) [10018783-10200MLF](#)  
[10018783-10213TLF](#) [10018784-10210TLF](#) [10018784-11113TLF](#) [10025026-10001TLF](#) [5145154-8](#) [1871058-4](#) [2041119-2](#) [10018783-](#)  
[10212TLF](#) [10018784-10102TLF](#) [10018783-11200TLF](#) [SM3ZS067U215-NUT1-R2500](#) [10123371-001TRLF](#) [10018784-10110TLF](#)