


8801-1 PLUGBORD COMPONENT SIDE LAYOUT PAPER

NOTICE: Where tin coated circuitry exists a small percentage of the holes may have solder blockage. This is usually a light "skin" easily penetrated by component leads. In some cases, a soldering iron may be required.

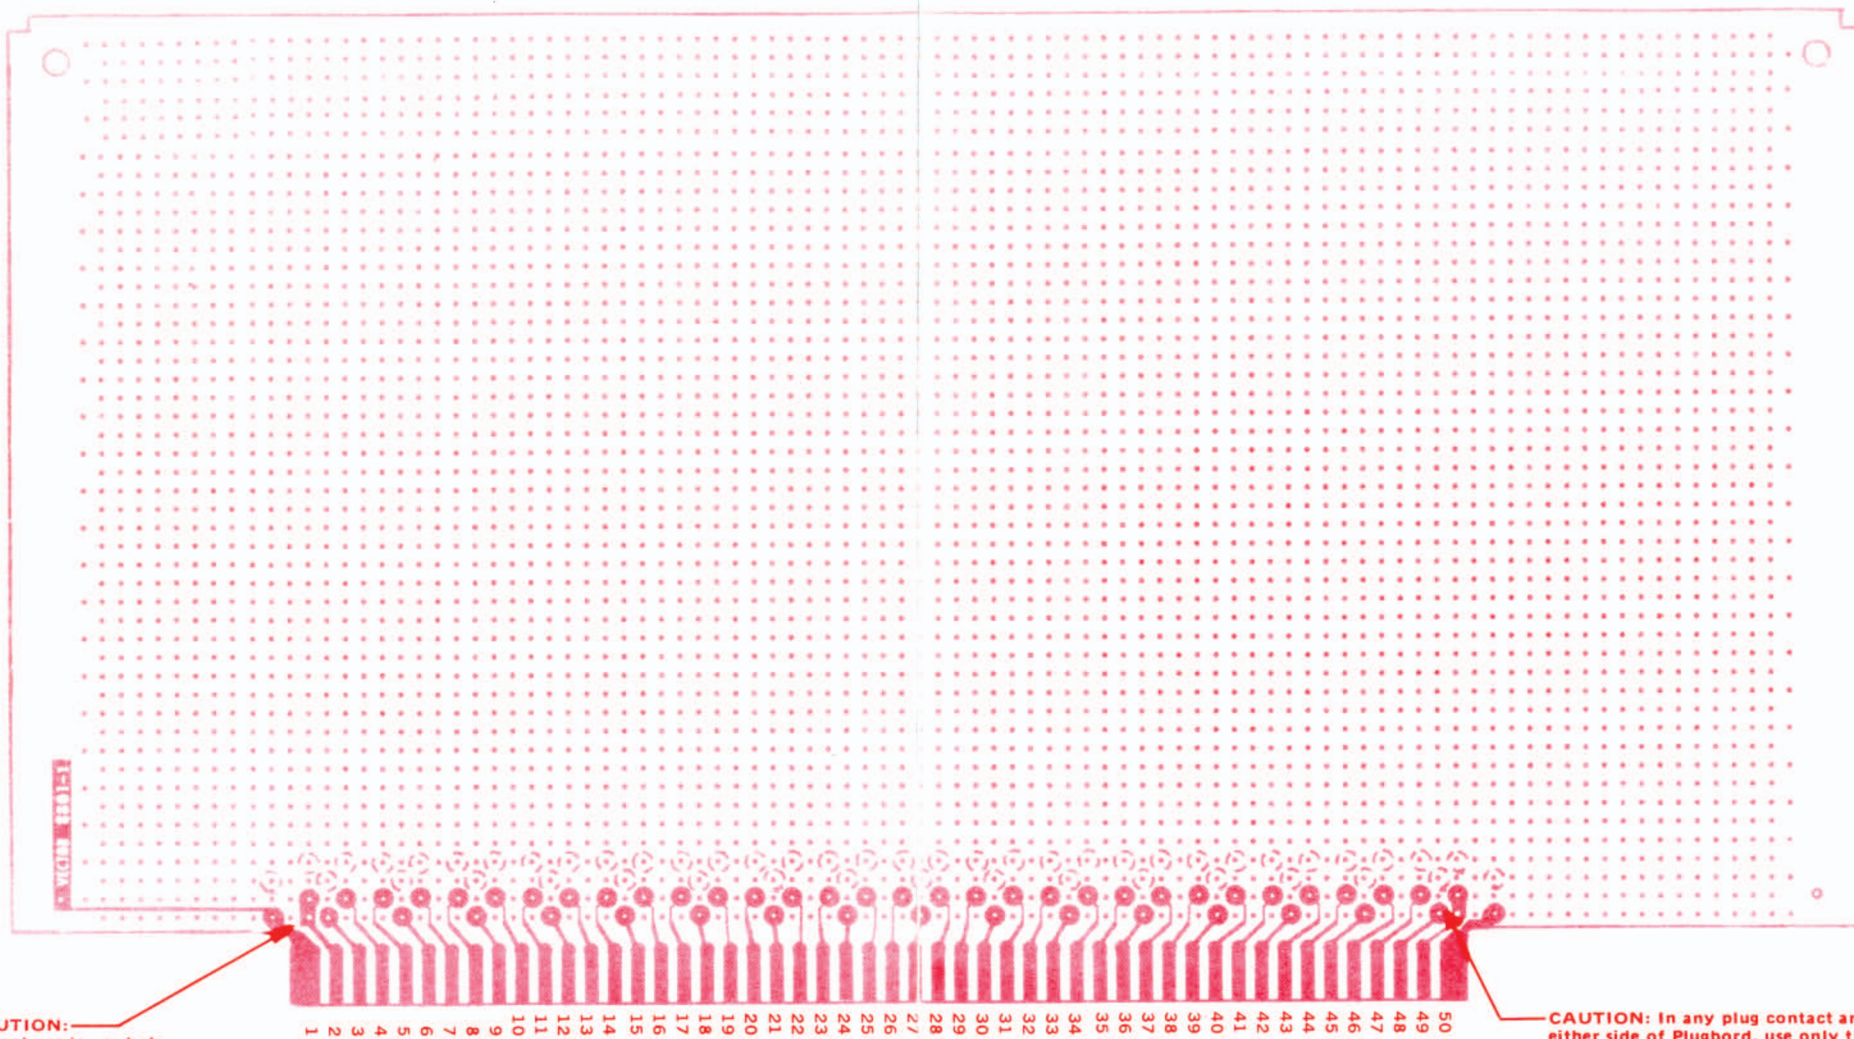

CAUTION:
Do not use lower hole
in pad type both ends
(insufficient clearance)

Before pressing terminals into board, position (rotate) terminals to maximize the clearance between the widest part of the terminal and the nearest adjacent conductor.


CAUTION: In any plug contact area on either side of Plugbord, use only those holes having pads. Holes without pads may have insufficient clearance to adjacent circuitry and using them could cause shorting.

NOTES:

1. BROKEN CIRCLE ABOVE EDGE CONTACTS INDICATES LOCATION OF ACTUAL CONNECTOR CONTACT PADS ON OPPOSITE SIDE OF BOARD.
2. INTENDED FOR USE IN NON-HOSTILE ENVIRONMENTS UP TO 200 VOLTS RMS OR 300 VOLTS D.C.

8801-1 PLUGBORD WIRING SIDE LAYOUT PAPER

NOTICE: Where tin coated circuitry exists a small percentage of the holes may have solder blockage. This is usually a light "skin" easily penetrated by component leads. In some cases, a soldering iron may be required.

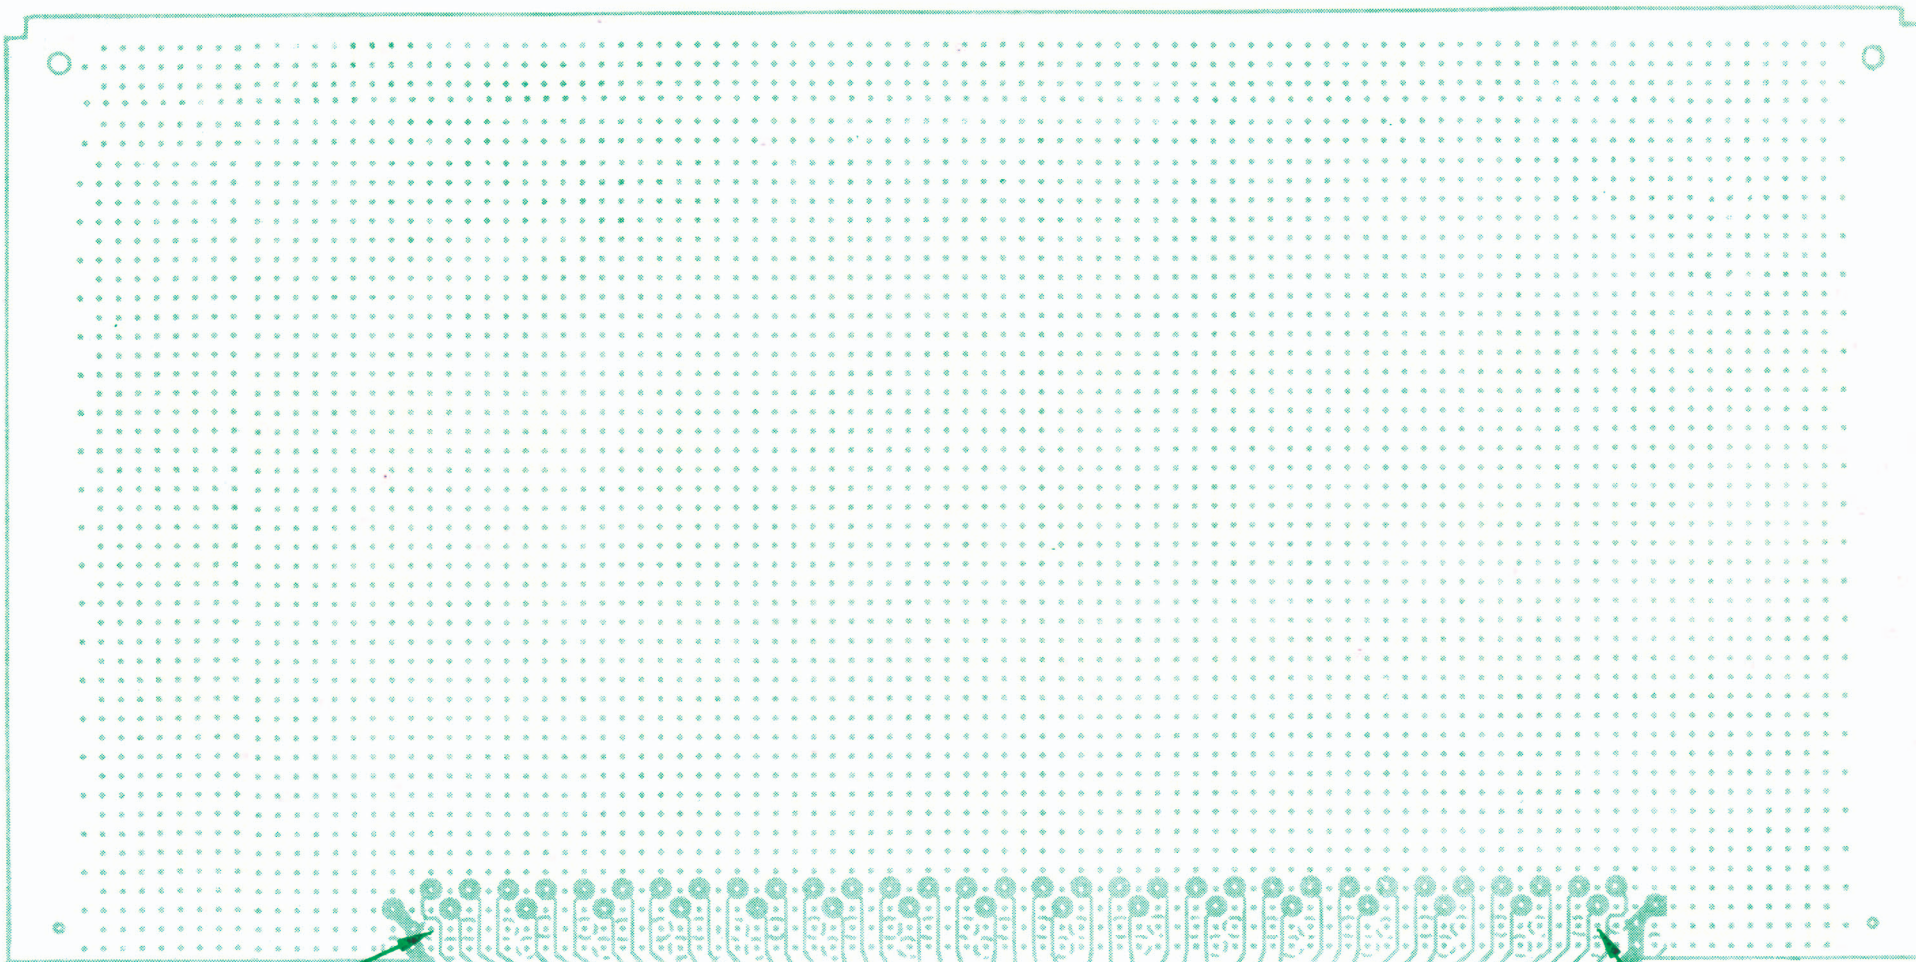

CAUTION:
Do not use lower hole
in pad type both ends
(insufficient clearance)

CAUTION: In any plug contact
area on either side of Plugboard,
use only those holes having pads.
Holes without pads may have
insufficient clearance to adjacent
circuitry and using them could
cause shorting.

VARIATIONS IN
RECEPTACLE CONTACT
DESIGNATIONS

- FF AF- 100
- EE AE- 99
- DD AD- 98
- CC AC- 97
- BB AB- 96
- AA
- 95
- z 94
- y 93
- x 92
- w 91
- v 90
- u 89
- t 88
- s 87
- r 86
- q 85
- p 84
- o 83
- n 82
- m 81
- l 80
- k 79
- j 78
- i 77
- h 76
- g 75
- f 74
- e 73
- d 72
- c 71
- b 70
- a 69
- Z- 68
- Y- 67
- X- 66
- W- 65
- V- 64
- U- 63
- T- 62
- S- 61
- R- 60
- Q- 59
- P- 58
- O- 57
- N- 56
- M- 55
- L- 54
- K- 53
- J- 52
- I- 51
- H- 50
- G- 49
- F- 48
- E- 47
- D- 46
- C- 45
- B- 44
- A- 43

Before pressing terminals into board, position (rotate) terminals to maximize the clearance between the widest part of the terminal and the nearest adjacent conductor.

NOTES:

1. BROKEN CIRCLE ABOVE EDGE CONTACTS INDICATES LOCATION OF ACTUAL CONNECTOR CONTACT PADS ON OPPOSITE SIDE OF BOARD.
2. INTENDED FOR USE IN NON-HOSTILE ENVIRONMENTS UP TO 200 VOLTS RMS OR 300 VOLTS D.C.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [PCBs & Breadboards category](#):

Click to view products by [Vector manufacturer](#):

Other Similar products are found below :

[8004](#) [8007](#) [8016](#) [8017](#) [8028](#) [8029](#) [1268-12](#) [1268-10](#) [1320833-1](#) [923252-R](#) [3410](#) [3396](#) [15107](#) [8006](#) [8015](#) [8018](#) [8019](#) [8020](#) [1268-19](#) [1268-20](#) [8026](#) [1239-19](#) [SBBTH1520-1](#) [SBBTH1506-1](#) [SBBTH4080-1](#) [SBBTH3030-1](#) [SBBTH1512-1](#) [SBBTH1508-1](#) [SBB2808-1](#) [SBB2805-1](#) [SBB1605-1](#) [SBB1602-1](#) [SBB1005-1](#) [SBB1002-1](#) [3426](#) [32P15WE](#) [ZAS1X206203XRPU160](#) [SBBTH3040-1](#) [SBB0004-1](#) [SBB830-QTY10](#) [7115](#) [923749-I](#) [RE013-LF](#) [RE014-LF](#) [RE015-LF](#) [RE1210-LF](#) [RE200-C3](#) [RE210-S1](#) [RE317-HP](#) [RE438-LF](#)