

Helping Customers Innovate, Improve &amp; Grow



VX-501-0255-80M0

**Nominal frequency (f0)**
**80 MHz**
**Performance Specifications**
**Frequency stabilities**

Parameter	Min	Typical	Max	Units	Condition
Additional information	APR > ±20ppm incl. df vs initial, temp -40...85°C, dVs, dLoad, aging				

**Frequency Tuning**

Parameter	Min	Typical	Max	Units	Condition
Absolute pulling range (APR) (df/f0)	20			ppm	ext. tuning voltage @ 0 to 3.3V
Linearity			10	%	
slope (pos./neg.)	positiv				
Frequency control input impedance	1000			kOhm	

**RF output**

Parameter	Min	Typical	Max	Units	Condition
Signal	LVCMOS				
Load	13.5	15	16.5	pF	
Fan out	3				
Rise Time			3	ns	@20 to 80 %Vout
Fall Time			3	ns	@80 to 20 %Vout
Duty cycle	45		55	%	@1.65 V
V Low			0.3	V	
V High	2.97			V	
Spurious			-100	dBc	


Supply voltage					
Parameter	Min	Typical	Max	Units	Condition
Supply voltage (Vs)	3.14	3.3	3.47	V	
Current consumption steady state			24	mA	@ Vsnom & 25 °C

Additional Parameters					
Parameter	Min	Typical	Max	Units	Condition
Phase Noise		-75		dBc/Hz	@10Hz
		-108		dBc/Hz	@100Hz
		-130		dBc/Hz	@1kHz
		-149		dBc/Hz	@10kHz
		-154		dBc/Hz	@100kHz
		-158		dBc/Hz	@1MHz
		-161		dBc/Hz	@10MHz
Jitter			0.1	psec (RMS)	@ 12kHz to 80MHz
Additional information	Jitter typ 0.08psec				
Processing & Packing	handling&processing note				

Additional Environmental Conditions	
Parameter	Description
RoHS compliance	100% RoHS 6 compliant
Washable	non-washable device
ESD HBM	JESD22-A114F Class 1C - 10* 2000V
Mechanical Shock	MIL-STD-202 Meth 213B Cond. C - 100g 6ms 6 shocks in each direction
Vibration, Sine	MIL-STD-883 Meth 2007 Cond A - 20g 20-2000Hz 4x in each 3 axis 4min sweep time
Moisture Sen. Level	JESD22-A113-B - only if > MSL 1
Solderability	J-STD-002C Cond. A, Trough hole device; Cond.B, SMD ( correspond to MIL-STD-883 Meth 2003) - 255°C (dipping Time 5 ±0,5sec.) Dip&Look with 8h damp pre-treatment: solder wetting >95%
High temp operating life(HTOL)	MIL-STD-202 Meth108A Cond C - 1000h @ 105°C under voltage
Low temp operating life(LTOL)	IEC 60068-2-1 Cond. Ae - Ta= -40°C, >1000 hours with bias for OCXO
Reflow Simulation Test	J-STD-020D - Total 3x Lead free profile (for SMD)

Absolute Maximum Ratings					
Parameter	Min	Typical	Max	Units	Condition
Operable temperature range	-40		+85	°C	
Storage temperature range	-40		+90	°C	

# Enclosure

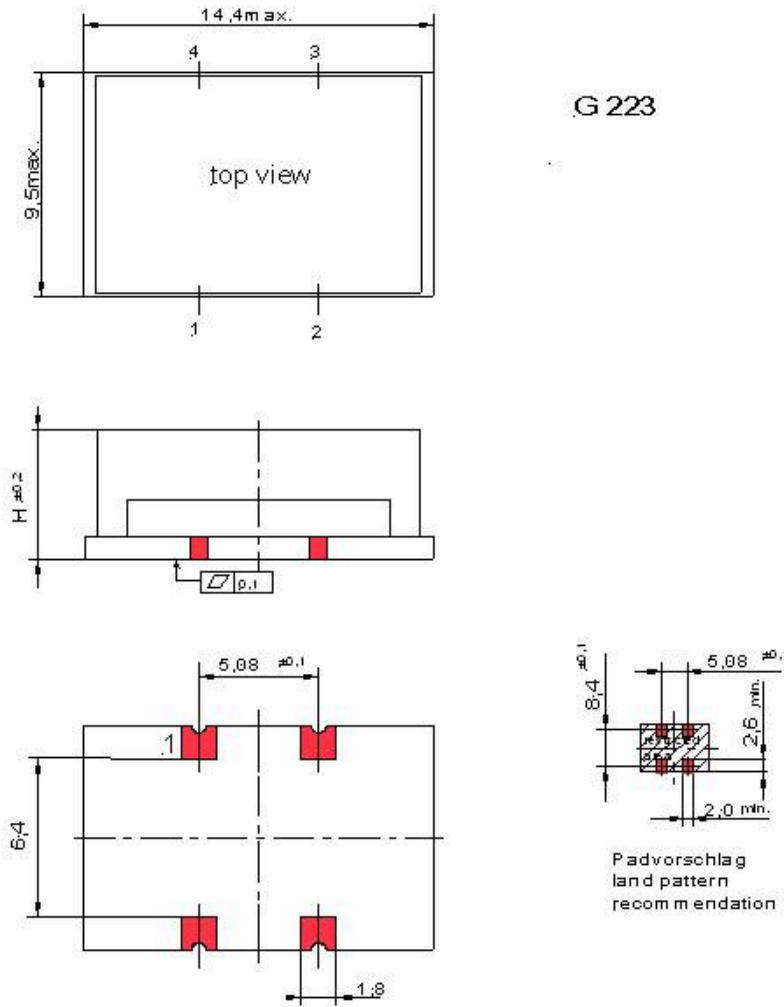

all units in mm

Enclosure Info	
Parameter	Description
Type	G223B
Height	5.9 mm
Pin Connections	1: Vc (control voltage) 2: GND(Case) 3: RF-Output 4: Vs (supply voltage)
Marking	VX-501-0255 80M000 * VI AYYWW * pin-1 marking
Package cover material	Metal
Package base material	FR4


## Solder profile

Recommended reflow solder profile according IPC/JEDEC J-STD-020 (latest revision)

Additional Information:

This SMD oscillator has been designed for pick and place reflow soldering  
SMD oscillators must be on the top side of the PCB during the reflow process.

## Standard shipping method

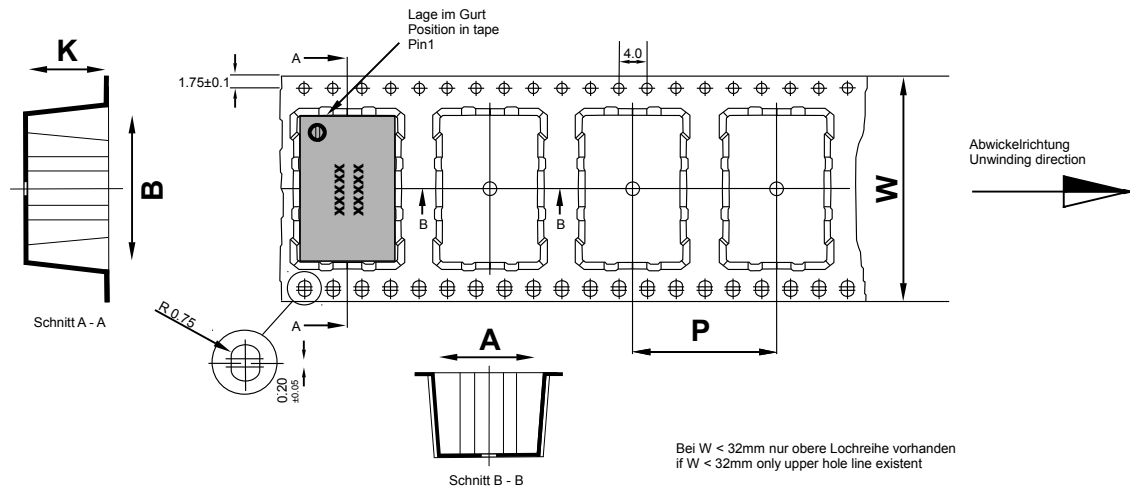

Maßangaben in mm:

A, B und K Maße von Bauelement abhängig

Fertigungstoleranzen entsprechen der DIN IEC 286-3

Dimension in mm:

A, B und K are dependent upon component dimensions

production tolerance complying DIN IEC 286-3

All dimensions in millimeters unless otherwise stated

### Reel Info

Tape width W [mm]	Quantity per meter	Quantity per reel	P [mm]	A [mm]	B [mm]	K [mm]
24	83.3	850	12	9.8	15	6.4

**Notes:** Unless otherwise stated all values are valid after warm-up time and refer to typical conditions for supply voltage, frequency control voltage, load, temperature (25°C).  
Subject to technical modification.

## For Additional Information, Please Contact

### USA:

Vectron International  
267 Lowell Road, Suite 102  
Hudson, NH 03051  
Tel: 1.888.328.7661  
Fax: 1.888.329.8328

### Europe:

Vectron International  
Landstrasse, D-74924  
Neckarbischofsheim, Germany  
Tel: +49 (0) 7268.801.100  
Fax: +49 (0) 7268.801.282

### Asia:

Vectron International  
68 Yin Cheng Road(C), 22nd Floor  
One LuJiaZui  
Pudong, Shanghai 200120, China  
Tel: +86 21 6194 6886  
Fax: +86 21 6194 6699

### Disclaimer

Vectron International reserves the right to make changes to the product(s) and or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [VCXO Oscillators](#) category:*

*Click to view products by [Vectron](#) manufacturer:*

Other Similar products are found below :

[3808AI-DF-33NG-80.0000](#) [SIT3808AI-CF-33EM-50.000000X](#) [603281](#) [YNETHE125](#) [SiT3701AC-43-33C-10.00000X](#) [315LB3I1250T](#)  
[CVPD-922X-100.000](#) [CVSS-945-125.000](#) [ASVV-4.096 MHz-L50-N152-T](#) [CVHD-950-122.880](#) [CVHD-950-80.000](#) [CVHD950X-54.000](#)  
[CVPD-920-100.000](#) [ASG-P-V-A-1.000GHZ](#) [ECXV-P37C2M-640.000](#) [CVPD-920-80.000](#) [CVHD-957-22.57920](#) [ECXV-P37C2N-155.520](#)  
[ECXV-P37C2N-56.000](#) [ECXV-P37C2N-184.320](#) [ECXV-P37C2N-155.000](#) [ECXV-P35C2N-155.520](#) [LFVCXO067515Bulk](#) [ASG-D-V-A-](#)  
[1.000GHZ](#) [ASG-D-V-A-491.520MHz](#) [CVHD-950-74.25](#) [CVPD-920-74.25](#) [ABLNO-V-92.160MHZ](#) [ABLNO-V-120.000MHZ](#) [ABLNO-V-](#)  
[80.000MHZ](#) [ABLJO-V-100.000MHz](#) [ABLJO-V-120.000MHZ](#) [ABLJO-V-122.880MHz](#) [ABLJO-V-150.000MHz](#) [ABLJO-V-155.520MHZ](#)  
[ABLJO-V-160.000MHz](#) [ABLJO-V-200.000MHz](#) [ABLJO-V-200.000MHZ-T](#) [ABLJO-V-80.000MHz](#) [ABLJO-V-96.000MHz](#) [ABLNO-V-](#)  
[100.000MHz](#) [ABLNO-V-100.000MHz-T2](#) [ABLNO-V-120.000MHz-T2](#) [ABLNO-V-122.880MHz](#) [ABLNO-V-125.000MHz](#) [ABLNO-V-](#)  
[156.250MHz](#) [ABLNO-V-96.000MHZ](#) [ABLNO-V-96.000MHz-T2](#) [ABLNO-V-104.000MHZ](#) [ABLNO-V-125.000MHZ-T2](#)