



USB 2.0 A to Lightning Cable

Made for iPhone/iPad/iPod

USB 2.0 A to Lightning Cable



MFi

certified



2.4A max




For iOS devices



C89 Module

Apple Officially Certifiable


UPC/EAN codes available on the Apple website

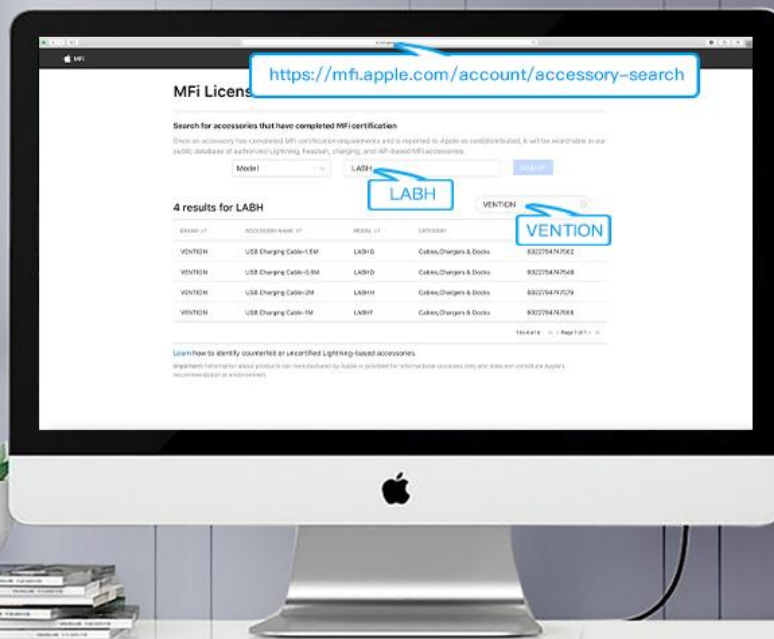

MFi Certificated Supplier

Made for

 iPhone | iPad | iPod

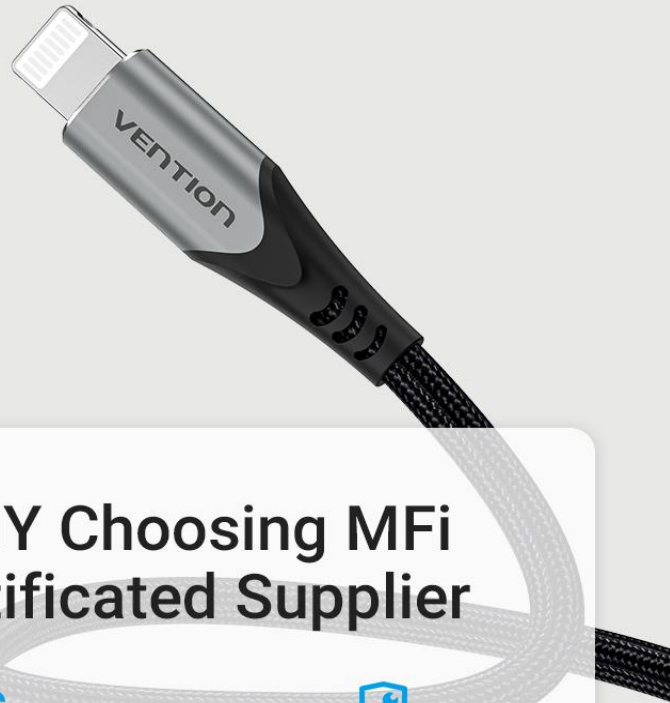

WHY Choosing MFi Certificated Supplier

iOS

Totally compatible for iOS devices



Supports Apple's official warranty policy



Safeguard your battery while charging



Stable and safe voltage

Original Apple MFi Chip

Upgraded Apple C89 module , ensures safer & smarter charging environment




C89 Module


MFi certified chip

Note: The internal structure is a rendering
please refer to the actual product

Fast Charge for iPhone

MFi certified, up to 2.4A current



480Mbps Fast Data Transmission

Standard USB 2.0, simultaneous fast charge and transfer



Note: All data are from Vention Lab

Upgraded Apple C89 Connector


Ensure charging faster and safer

13mm extra long tail

Long service time

Aluminum alloy shell


Good texture

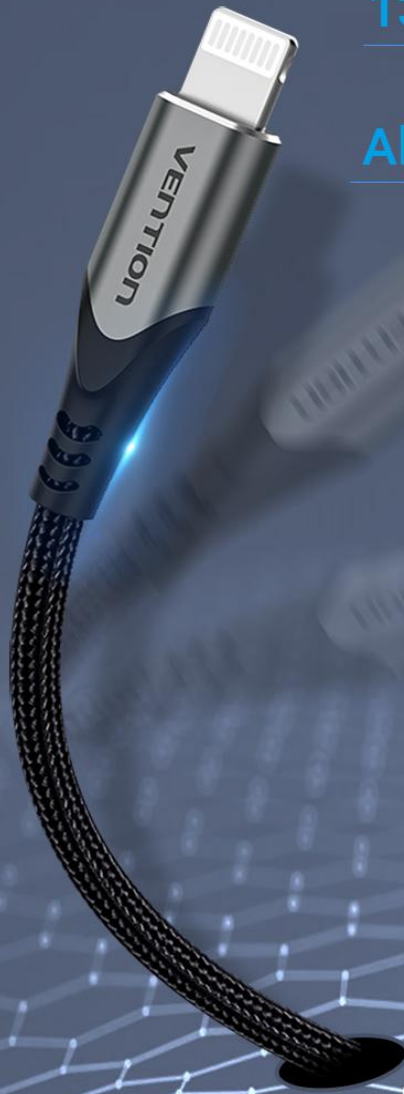

Note: All data are from Vention Lab

Durable and Not Easy to Get Knotted

TPE+Nylon braided jacket, wear-resistant and resistant to stretch

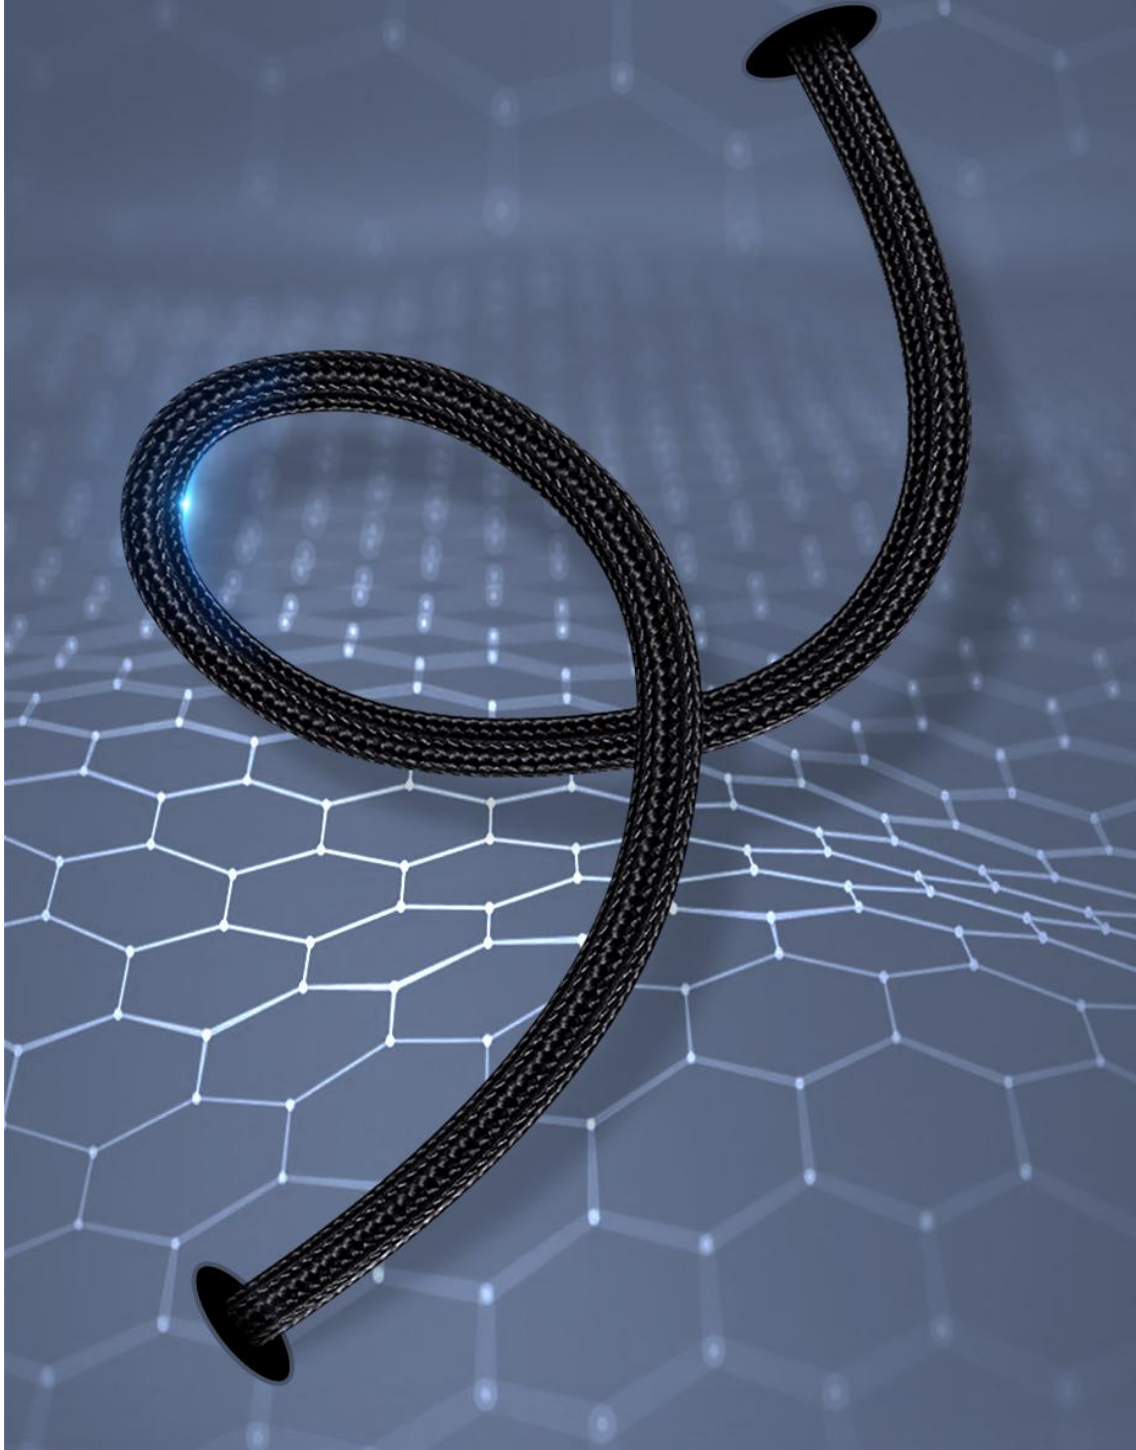


No Warning Pop-up

Synchronized with updated system
fully compatible with iOS



MFi Certified Cable,
Fully compatible with iOS

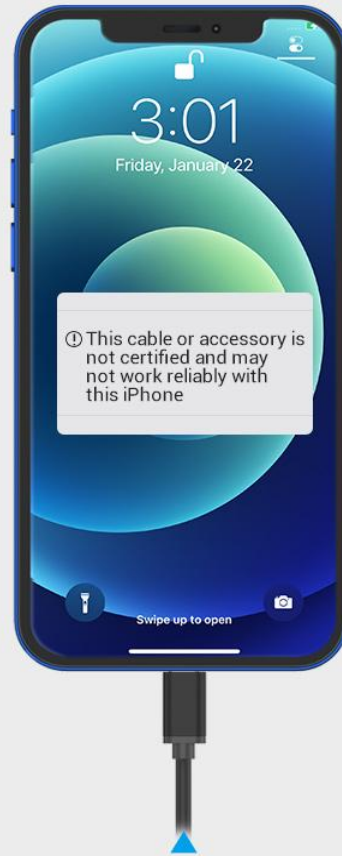

Non-MFi Certified Cable,
Unstable and incompatible

Reasons for Pop-ups

Not equipped with
Apple chip and
cannot compatible
with iOS, so as to
pop up a warning

Non-MFi Hazard

No Apple chip to filter
dangerous currents
and data which may
damage the phone

Multiple Lengths

Meet different needs

0.5m

For short-distance
charging




1-1.5m

Daily charging
in office



2m

Long cable
charge freely

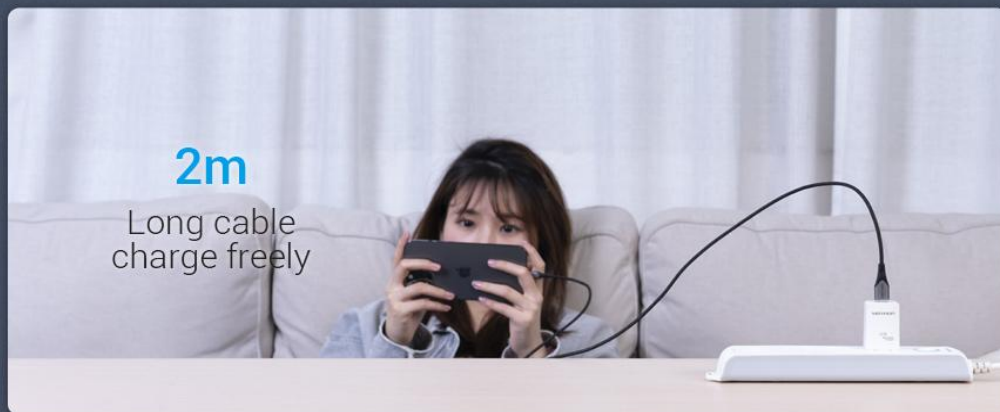

Product Parameters

Brand: Vention

Name: USB 2.0 A to Lightning Cable

Model: LABH

Color: Gray

Interface: USB 2.0 A Male/Lightning Male

Module Model: C89 (Lightning Connector+Chip)

Interface Technics: Nickel-plated

Transmission Speed: 480Mbps

Conductor: Tinned-copper

Shell: Aluminum Alloy

Shielding: Aluminum Foil+Metal Braided

Jacket: TPE+Nylon Braided Jacket

AWG: 0.5-1m: 24+30AWG,1.5-2m: 21+30AWG

OD: 3.5mm

Length: 0.5/1/1.5/2m

Power Supply: 2.4A

Warranty: 1 Year

Packing: Color Box



Note: Packing difference exists for different meters or batches
The photo is for reference only

Length	Art.No.	EAN Code
0.5m	LABHD	6922794747548
1m	LABHF	6922794747555
1.5m	LABHG	6922794747562
2m	LABHH	6922794747579



Package Contents

USB 2.0 A to Lightning Cable

Packaging Information

Packing Dimension	cm
Packing Weight	kg
Carton Dimension	48*29*30cm
Carton Qty	120pcs(0.5m),84pcs(1m,1.5m)
Carton Weight	6kgs
Package	Color Box

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Audio Cables](#) / [Video Cables](#) / [RCA Cables](#) category:

Click to view products by [Vention](#) manufacturer:

Other Similar products are found below :

[1-3737-600-3216](#) [LF3BLX](#) [30-513](#) [28-511-0](#) [RCA05RCAB](#) [427493000-3](#) [49152A-010-S2](#) [32-3766](#) [32HR07284X](#) [CAB-LFH-V16A16S0](#)
[DB25M02XLRMXLRFY](#) [LF1BKX](#) [TT746](#) [CA-MINIDP-DVIM-6FT](#) [CA-MINIDP-DVIM-3FT](#) [CA-MINIDP-DVIM-10FT](#) [CA-MINIDP-](#)
[VGAF-3FT](#) [CA-MINIDP-HDMIF-6FT](#) [LF10GNX](#) [427492100-3](#) [LF4BLX](#) [cab-DP to HDMI Passive](#) [VGA CABLE](#) [DISPLAYPORT TO](#)
[VGA CABLE](#) [TT3GNX](#) [1700021831-01](#) [Audio Cable](#) [427491690-3](#) [427528000-3](#) [TT2PX](#) [SPEAKER CABLE L=300mm](#) [1700000898](#)
[Speaker cable](#) [594E3412000E](#) [32007-005500-200-RS](#) [BCLBH](#) [BANHF](#) [BAPHG](#) [COQBI](#) [COEHG](#) [COJBI](#) [DAEBK](#) [51771](#) [39448](#) [VAB-](#)
[S04-L](#) [VAS-A13-B200](#) [VAS-A13-B300](#) [KABADA USBC/JACK OEM-C11](#) [BCNBI](#) [A-CM-COMBO5-03](#)