

Smart Clients

NEW

VIA

ARTiGO A1250

Ultra-slim system for semi-embedded industrial applications for digital signage media player



Features

- 1.2GHz VIA Eden® X4 processor
- DX11 3D/2D graphics with MPEG-2/WMV9/VC1/H.264 decoding acceleration
- VIA MagicView® content management software available
- Support for dual independent VGA + HDMI displays
- DC jack strap holder

Specifications


Model Name	ARTiGO A1250
Processor	1.2GHz VIA Eden® X4
Chipset	VIA VX11H Media System Processor
BIOS	AMI Aptio UEFI BIOS, 32Mbit Flash memory
System Power Management	Timer Power-On ACPI compliant
System Memory	1 DDR3 1066/1333 SODIMM socket Up to 8GB memory size
Storage	Supports 1 2.5" SATA HDD/SSD
Graphics	Integrated Chrome® 400 DX11 3D/2D graphics with MPEG-2, WMV9, VC1 and H.264 video decoding acceleration
Audio	VIA VT2021 High Definition Audio Codec
Display I/O	1 Mini HDMI port 1 VGA port supporting VGA resolutions up to 2560 x1600 pixels Dual independent VGA + HDMI display at different resolutions, pixel depths, and refresh rates
USB	2 USB 3.0 ports 2 USB 2.0 ports
LAN	VIA VT6130 PCIe Gigabit Ethernet controller Supports wake-on-LAN and Boot from LAN (PXE)
Front Panel I/O	2 USB 2.0 ports 3 Audio jacks: Line-in, Line-out and Mic-in 1 Power on/off switch 1 Red LED for HDD activity 1 Green LED for power status
Back Panel I/O	2 USB 3.0 ports 1 Mini HDMI port 1 VGA port 1 Gigabit Ethernet port 1 DC strap holder hole 1 Antenna hole reserved to support Wi-Fi 1 DC-in jack
Watch Dog Timer	System reset; programmable 1~255 sec
Power Supply	12V DC-in (typical: 30W)
Operating System	Windows 10/8.1/8/7, WES 7, Linux
Mechanical Construction	Aluminum top cover chassis housing Galvanized steel sheet (SECC) body chassis housing Front removable aluminum face plate
Mounting	VESA mount
Dimensions	177mm(W) x 30mm(H) x 125mm(D) (6.96" x 1.18" x 4.92")
Weight	0.68kg (1.49lbs)
Operating Temperature	0°C ~ 40 °C
Operating Humidity	0% ~ 90% (non-condensing)
Storage Temperature	-10°C ~ 60 °C
Compliance	CE/FCC



Front Panel External I/O



Rear Panel External I/O

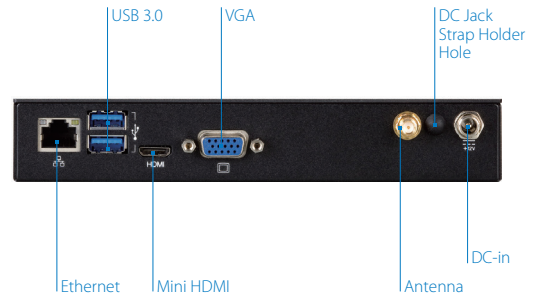

Ordering Information

Part Number	CPU Frequency	Description
ATG-A1250-5Q12A3	VIA Eden® X4 @ 1.2GHz	1.2GHz VIA Eden® X4 CPU Based Semi-Embedded System with Mini HDMI, VGA, 2 USB 3.0, 2 USB 2.0, Gigabit Ethernet, SATA, 12V DC-in, US Power Cord
ATG-A1250-6Q12A3	VIA Eden® X4 @ 1.2GHz	1.2GHz VIA Eden® X4 CPU Based Semi-Embedded System with Mini HDMI, VGA, 2 USB 3.0, 2 USB 2.0, Gigabit Ethernet, SATA, 12V DC-in, EU Power Cord
ATG-A1250-7Q12A3	VIA Eden® X4 @ 1.2GHz	1.2GHz VIA Eden® X4 CPU Based Semi-Embedded System with Mini HDMI, VGA, 2 USB 3.0, 2 USB 2.0, Gigabit Ethernet, SATA, 12V DC-in, JP Power Cord
ATG-A1250-8Q12A3	VIA Eden® X4 @ 1.2GHz	1.2GHz VIA Eden® X4 CPU Based Semi-Embedded System with Mini HDMI, VGA, 2 USB 3.0, 2 USB 2.0, Gigabit Ethernet, SATA, 12V DC-in, CN Power Cord

Optional Accessories


Wireless Accessories

Part Number	Description
EMIO-1533-00A2	VNT9271BB05B-516 IEEE 802.11 b/g/n USB Wi-Fi module with assembly kit

Mounting Options

Part Number	Description
99G42-09288E-1	Mechanism kit, wall mount bracket, 116mm x 116mm x 18.4mm

Dimensions

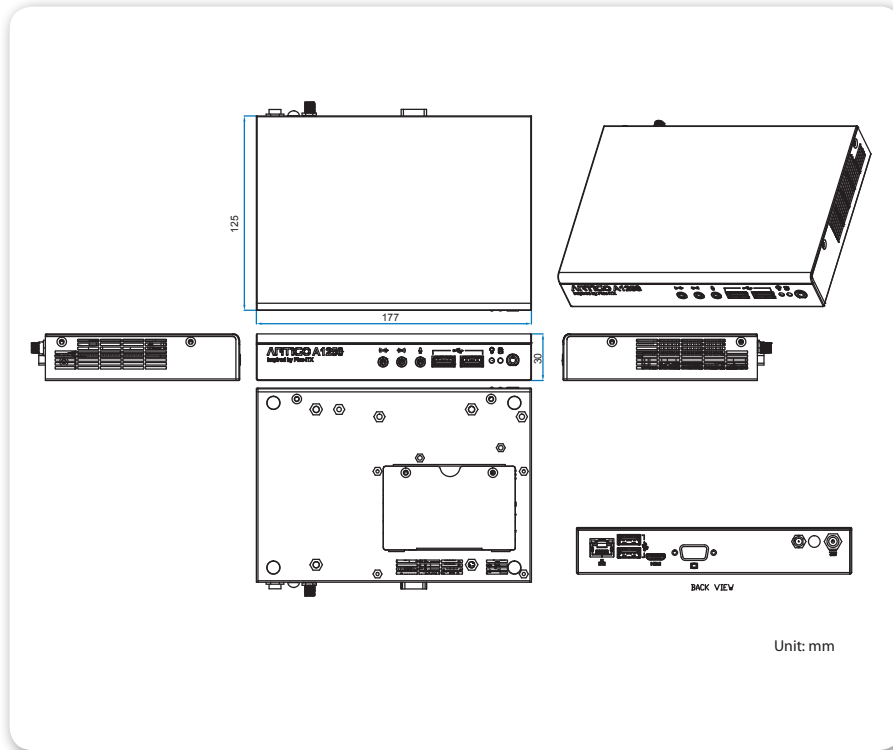

Packing List

Items

- ARTiGO A1250 system
- AC-to-DC power adapter
- Power cord
- HDD screws
- DC jack strap holder
- SATA ribbon cable

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Embedded Box Computers](#) category:

Click to view products by [VIA manufacturer](#):

Other Similar products are found below :

[tBOX312-870-FL-i7-DC](#) [tBOX313-835-FL-RJ-DC](#) [UPOS-3150-R0W0E](#) [ARK-20-S8A1E](#) [R2224WTTYSR](#) [BXNUC9i5QNX](#)
[BXNUC9i5QNX1](#) [BKNUC9V7QNX](#) [BKNUC9V7QNX1](#) [2-A0DF-2001](#) [BKCMB1ABB](#) [BKCMB1ABA](#) [EM3000-3845-8-128-WL-U-1](#)
[TANK-870AI-i5/8G/2A-R10](#) [PRFE21000038](#) [EM5000-I3-8-128-WL-W7-1](#) [EM3000-3845-8-128-WL-W7-1](#) [PRFE21000039](#) [AMOS-825-](#)
[1Q10A1](#) [UPS-EDAI-X70864-U01-DC01](#) [UPX-EDGEI7-A10-1664-F01](#) [MXE-211/M8G](#) [PXIe-3985/M16G](#) [PXIe-3987/M16G/SSD](#) [AIMB-](#)
[T1215DA-00Y0E](#) [AIMB-T12315A-00Y0E](#) [AMAX-5580-54000A](#) [APAX-5580-474AE](#) [ARK-6322-Q0A2E](#) [DS-100GF-S8A1E](#) [DS-100GL-](#)
[S8A1E](#) [EPC-R4680CQ-XAA1E](#) [ESRP-CSS-UNO2484](#) [ITA-1611-10A1E](#) [ITA-1711-10A1E](#) [MIC-710AI-00A1](#) [MIC-720AI-00A1](#) [UNO-247-](#)
[J1N1AE](#) [UTX-3115FS-S6A2E](#) [AMI220AF-4L-7500](#) [ELIT-1200](#) [AIE100-903-FL](#) [EBOX671-517-FL-DC](#) [MVS900-511-FL](#) [AMS200](#) [SE-92-](#)
[I7](#) [SI-606](#) [SI-60E](#) [TANK-760-HM86i-i5/4G-R10](#) [BKCM8i7CB8N](#)