

ETX Modules

VIA

ETX-8X90


ETX® Module with high-performance multimedia capabilities

Features

- 1.2GHz VIA Nano® X2 E-Series processor
- Supports up to 4GB 1066 DDR3 SDRAM
- DX9 graphics with MPEG-2/WMV9/VC1/H.264 decoding acceleration
- Display interface for VGA, supporting resolutions of up to 2048 x 1536, and one 18/24-bit dual-channel LVDS panel
- Supports four USB 2.0 and two mini USB ports

Board Placement

VIA VX900 Chipset




VIA Nano® X2 E-Series CPU

DDR3 SODIMM


Specifications

Model Name	ETX-8X90
Processor	1.2GHz VIA Nano® X2 E-Series
Chipset	VIA VX900 Media System Processor
BIOS	AMI BIOS, 8Mbit Flash memory
System Memory	1 DDR3 1066 SODIMM slot Up to 4GB memory size
Storage	Up to 2 SATA or 2 EIDE (master mode only)
Graphics	Integrated VIA Chrome®9 HD DX9 3D/2D graphics with MPEG-2, WMV9, VC1 and H.264 video decoding acceleration
LAN	Realtek RTL8139DL 10/100M Ethernet controller
Audio	1 HD audio digital interface
Super I/O	Fintek F71869ED
Supported Expansion I/O	2 PCI
Left Panel I/O	2 SATA connectors (1 optional) 2 Mini USB 2.0 1 Micro SD card slot 1 Audio pin header for Line-in, Line-out, Mic-in
Supported I/O	4 USB 2.0 ports 1 VGA 1 Dual-channel 18-bit/24-bit LVDS panel 2 COM 1 10/100M Ethernet 2 IDE (master mode only) 1 SMBus 1 I ² C 1 ISA (not support DMA transfer)
Operating System	Windows 7, WES 7, Windows CE, Linux
System Monitoring & Management	CPU temperature reading, CPU fan speed reading, System voltage monitoring, Watch Dog Timer, Wake-on-LAN, System power management, AC power failure recovery
Operating Temperature	0°C ~ 60°C
Operating Humidity	0% ~ 95% (non-condensing)
Form Factor	11.4cm x 9.5cm (4.45" x 3.7")
Compliance	ETX 3.02, compact module

Carrier Board Back Panel I/O

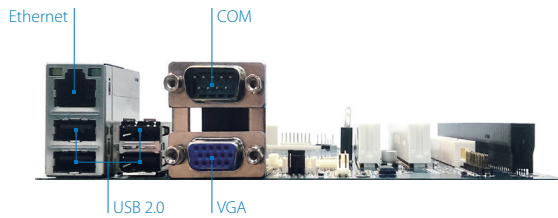

Carrier Board (ETXDB1)



* The carrier board is only for evaluation purpose.

Specifications

Model Name	ETXDB1
Super I/O	Fintek F71869ED
Onboard I/O	1 ISA connector (compatible with ISA ETX 3.0) 2 EIDE connectors (master mode only) 1 COM port pin headers 1 LPT connector 1 Dual-channel 18/24-bit LVDS panel connector 1 Audio pin header for Line-out, Mic-in 1 SMBus pin header 1 I ² C pin header 1 Backlight voltage selects pin header 1 SIR pin header 1 RTC external battery holder 1 ATX power connector 2 PCI slots (compatible with PCI 2.3, 32bit/33Mhz)
Rear Panel I/O	4 USB 2.0 ports 1 VGA port 1 COM port 1 10/100Mbps Ethernet connector
Power Supply	ATX power connector
Operating Temperature	0°C ~ 60°C
Operating Humidity	0% ~ 95% (non-condensing)
Form Factor	Mini-ITX (17cm x 17cm, 6.7" x 6.7")

Ordering Information

Model Name	CPU Frequency	Description
ETX-8X90	1.2GHz VIA Nano® X2 E-Series	ETX Board with 1.2GHz VIA Nano® X2 E-Series CPU with VGA, LVDS, 4 USB 2.0, 2 Mini USB 2.0, COM, 10/100Mbps Ethernet, SATA, 2 IDE, 2 PCI, Micro SD card slot, ATX power connector
ETXDB1	N/A	ETX-8X90 evaluation carrier board
99G42-01381Q	N/A	Heatsink with fan for ETX-8X90
99G42-01413Q	N/A	Heat spreader for ETX-8X90
STK-E8X90-00A0	1.2GHz VIA Nano® X2 E-Series	ETX-8X90 starter kit
STK-E8X90-01A0	1.2GHz VIA Nano® X2 E-Series	ETX-8X90 starter kit with Panel

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [System-On-Modules - SOM category](#):

Click to view products by [VIA manufacturer](#):

Other Similar products are found below :

[COMX-CORE-310](#) [COMX-P4040-4G-ENP2](#) [PICOIMX6U10R1GBNI4G](#) [PICOIMX6U10R1GBNI4GBW](#) [MC27561-TIGER](#) [MC27561-LION](#) [CC-WMX6UL-SMPL](#) [CB-52-PUS-110-SX](#) [BD63725BEFV-EVK-002](#) [5728-PJ-4AA-RI](#) [A00150](#) [COMX_P4080](#) [A20-SOM-EVB](#) [RK3188-SOM](#) [RK3188-SOM-4GB](#) [100-1225-1](#) [PICOIMX6Q10R1GBNI4G](#) [Nit6Q](#) [A20-SOM-N8GB](#) [PER-TAICX-A10-001](#) [PER-TAIX2-A10-2280](#) [EDL-mPCIe-MA2485](#) [SOM-5897C7-U0A1E](#) [SOM-6896C7-U2A1E](#) [SCM180-Dual-2G_Industrial](#) [3354-HX-X38-RC](#) [5728-PJ-4AA-RC](#) [6455-JE-3X5-RC](#) [Morph-IC-II](#) [ET876-X7LV](#) [IFC6301-10-P2](#) [IFC6502-00-P1](#) [IFC67A1-00-P1](#) [IFC6701-00-P1](#) [iW-G33M-SCMQ-4L002G-E008G-BII](#) [PWSE1000200B](#) [CS-DEPTHAI-04](#) [MTQ-LNA7-B02](#) [MYC-C8MMQ6-8E2D-180-C](#) [MYD-C4378-4E512D-100-I](#) [MOD5213-100IR](#) [A20-SOM](#) [A20-SOM204-1G](#) [A20-SOM204-1GS16ME16G-MC](#) [AM3352-SOM-EVB](#) [BS1-IC](#) [BS2-IC](#) [102110278](#) [SLS16Y2_792C_256R_256N_0SF_I](#) [SLS12RT52_528C_0R_4QSPI_0SF_I](#)