

# VIA Embedded Product Guide 2015

# Table of Contents

## **03 Enabling New Connected Experiences**

### **04 Smart New Horizons**

### **07 Customization Services – The Path2Production**

## **08 Smart Connections**

## **10 VIA Embedded ARM Solutions**

### **13 ARM Software Packages and Services**

## **17 VIA Embedded ARM Boards**

### **ARM Pico-ITX**

#### **18 Quick Guide**

#### **19 VAB-1000**

#### **21 VAB-820**

#### **23 VAB-800**

#### **25 VAB-600**

## **27 VIA Embedded ARM Systems**

### **ARM Systems**

#### **28 Quick Guide**

#### **30 Viega Tablet**

#### **32 AMOS-820**

#### **34 AMOS-800**

#### **36 ALTA DS 2**

#### **38 ALTA DS**

#### **40 ARTiGO A900**

## **42 VIA Embedded x86 Solutions**

### **47 x86 Software Development Packages and Services**

## **50 VIA Embedded x86 Boards**

### **Pico-ITX**

#### **51 Quick Guide**

#### **52 EPIA-E900 (Pico-ITXe)**

#### **54 EPIA-P910**

#### **56 EPIA-P900**

### **Mini-ITX**

#### **58 Quick Guide**

#### **59 EPIA-M920**

#### **61 EPIA-M910**

#### **64 EPIA-M900**

#### **66 EPIA-M860**

#### **68 VB7009**

### **Computer-on-Module**

#### **70 Quick Guide**

#### **71 COMe-9X90**

#### **74 COMe-8X92**

#### **77 COMe-8X91**

#### **80 COMe-8X90**

#### **83 ETX-8X90**

## **86 VIA Embedded x86 Systems**

### **x86 Systems**

#### **87 Quick Guide**

#### **89 AMOS-3005**

#### **92 AMOS-3003**

#### **95 AMOS-3002**

#### **98 ARTiGO A1300**

#### **101 ARTiGO A1250**

#### **104 VIPRO VP7910**

## **107 VIA Embedded Accessories**

### **x86 Board Accessories**

#### **108 Power Boards: PWB-M120**

#### **108 Expansion Modules: PCIE-03, EXT-PCI**

#### **109 Expansion Modules: LPC-04, LPC-02, LPC-01**

### **ARM & x86 Wireless Accessories**

#### **110 Wireless Modules: VNT9271/EMIO-1533,**

Mobile Broadband Modules: EMIO-2550

# Enabling New Connected Experiences

VIA Embedded provides the hardware, software, and cloud building blocks for creating innovative embedded systems and devices that unleash the awesome potential of ubiquitous connectivity and the Internet of Things to deliver amazing new connected experiences.

With our unrivaled range of platforms, systems, software, and customization services, we deliver a comprehensive array of solutions that not only accelerate product development cycles but also empower you to swiftly take advantage of new opportunities in the market. Our holistic approach to enabling the design of embedded systems and devices covers the entire product life cycle, from defining initial requirements through to longevity support, enabling you to maximize your return on investment.

Whether it's a fanless multiscreen digital signage system with awesome multimedia capabilities or an ultra low power industrial automation controller system, we have a wealth of experience and expertise in not only providing customized solutions that meet your exact requirements but also in developing ground-breaking new systems and devices that open up exciting new markets.



# Smart New Horizons

In our increasingly connected world, the growing demand for seamless immersive experiences is opening up exciting new market opportunities across a broad spectrum of transportation, retail, entertainment, industrial, and home environments.

VIA Embedded is dedicated to enabling our customers to take advantage of these new opportunities by providing cutting-edge turnkey solutions that leverage the most advanced cloud, big data, IoT, M2M, and beacon technologies to facilitate the development and deployment of the richest sensory experience for a diverse range of applications.

## Transportation

Passenger expectations for increased comfort and convenience are rapidly reshaping the landscape across all modes of transportation, providing both challenges and opportunities for providers to enhance customer satisfaction, build loyalty, and stand out from the competition.

VIA Embedded has developed a wide range of innovative solutions which provide proven, flexible platforms for the development of new applications and services that will increase operational efficiency, boost passenger loyalty, and generate new revenue streams for players in the transportation industry.



## VIA BLISS Platform

The Android-based VIA BLISS (Bus Line In-Seat System) Platform provides a seamless end-to-end solution to ensure passengers remain in-touch, informed and entertained throughout their coach journey. With its scalable design and flexible development environment, the platform also provides operators with the potential to further boost their competitiveness and generate additional revenue streams by creating new applications and services such as destination experience programs in partnership with leading hotels, restaurants, museums, and entertainment venues.





## Retail

The world of brick and mortar retail is currently going through one of the most fundamentally disruptive changes imaginable as it seeks to leverage new wireless and beacon technologies to create richer and more personalized services that meet the needs of today's demanding consumer.

Beyond our wide range of digital signage platforms, VIA Embedded is developing a number of innovative new platforms that integrate our VIA AirTalk wireless communication suite of technologies to create engaging new experiences that will change the face of retail.

## Breeze Center Taipei

VIA Embedded has collaborated with Breeze Center in the fashion district of Taipei to create the shopping mall of the future by installing a rich mix of high-impact video walls and digital signboards in high-traffic areas throughout its four floors to deliver dynamic content at the right time and in the right location to maximize engagement with shoppers.

With its integration of VIA AirTalk beacon technology, the signage system also opens up interesting opportunities to further strengthen engagement with consumers by delivering product and promotional information direct to their smart phones and enabling them to book movie tickets and make restaurant reservations from their device.



## Smart Home

The rapid emergence of the IoT combined with the proliferation of mobile devices and wireless connectivity is accelerating demand for a myriad of smart home devices and applications such as remotely controlling heating and lighting and video monitoring security systems.

As a leader in embedded IoT and M2M platform innovation, VIA Embedded is leveraging our market-leading low power system development expertise and our advanced wireless integration capabilities to create a growing number of reliable turnkey platforms that can be easily customized for a wide variety of home automation and security applications that deliver increased convenience, comfort, energy efficiency, and safety benefits for consumers.



### VIA HD Video Monitoring Kit

The VIA HD Video Monitoring Starter Kit is a turnkey solution aimed at accelerating the development of wireless multi-node video monitoring systems for the rapidly growing home and commercial markets. With its ability to deliver multiple live video feeds from cameras installed throughout the house direct to a smart phone or tablet, it will give families a greater peace-of-mind that everything is going smoothly when they are away from home.



## Smart Industrial Automation

Technology advances have blurred the boundaries between the digital and physical worlds, giving rise to the next great industrial revolution, known variously as the Industrial Internet of Things or Industry 4.0. As a result, today's factories require the combination of intelligent, interconnected systems backed by cloud services and big data analysis to drive efficiency, flexibility and responsiveness.

VIA Embedded is helping to shape the smart factory of the future with our market-leading range of x86 and ARM-based industrial automation systems with rich multimedia and HMI capabilities, easy-to-use touch screen operation, and ruggedized low power designs that can operate in even the most extreme environments.



# Customization Services – The Path2Production

## **VIA Embedded Customization Services**

VIA Embedded provides solution providers with the smoothest Path2Production. From product concept through to physical product, customers can leverage our unrivaled range of platforms, systems, software, and customization services to create tailor-made, reliable, fully-integrated turnkey systems and solutions.

## **Hardware Customization: x86 or ARM, the Choice is Yours**

Many products in the VIA Embedded portfolio employ a modular design strategy that gives our customers the freedom to easily customize and modify existing designs, using fewer resources to bring innovative new devices to market ahead of their competitors. From low-power, feature-rich small form factor boards to complete turnkey solutions, VIA Embedded provides all the building blocks that embedded designers need to innovate reliable, low power, high-performance x86 systems or new devices that unleash the scalability and performance of the ARM architecture to deliver compelling new connected experiences for users.

## **Software Customization: Android, Linux or Windows, the Choice is Yours**

With our proven Android, Linux and Windows software development and customization capabilities, advanced system integration expertise, and rich customer support experience, VIA Embedded can provide a complete set of turnkey services enabling developers not only to minimize product development costs and times but also to speed overall time-to-market. VIA Embedded also provides a variety of easy-to-use SDKs and services for specialist applications and markets, including the VIA Smart Embedded Tool Kit (SMART ETK).





# Smart Connections

Today's connected world is opening up a whole new spectrum of business opportunities which leverage the IoT, M2M, big data, and the cloud for creating innovative smart experiences. At the core of this is the smart integration of services and features to forge new connections and scenarios which tightly weave the digital fabric into all aspects of our lives.

VIA Embedded is developing flexible services and solutions which not only make it easy for customers to manage the deployment and remote management of systems and devices across cloud-based networks in transportation, retail, and industrial applications, but also facilitate the creation of innovative new wireless broadcasting applications and services that enhance engagement with mobile devices.

## VIA Device Management System (DMS)

To ensure there is not a moment of downtime, VIA Embedded provides a flexible range of services for enabling remote system management, diagnostics, and monitoring across a cloud-based network using the VIA DMS to ensure 24/7 operation of mission critical tasks. VIA Embedded can provide a full backend setup or quickly integrate the DMS services into an existing system depending on customer requirements.



### VIA DMS Features

**Remote System Health Monitoring** tracks the operating status of each system and its key components, including the processor, DRAM, storage capacity utilization, and network connectivity speed and can be configured to react when, for example, a device reaches its storage threshold.

**Remote System Control** powers each system on or off, adjusts its screen brightness and audio volume, and boots the system at a pre-specified specific time using its Wake on LAN (WOL) or Real Time Clock (RTC) features. In addition, the screen snapshot feature makes it possible to check if applications are running correctly at any time.

**Remote System Update** enables the operating system and firmware, namely the BIOS or U-Boot, to be easily updated via OTA. Other system files can also be updated or deleted through the VIA DMS.

**Application Deployment** enables the installation, activation, and update of system applications using the VIA DMS.

**Task Management** can be used to schedule specific tasks for each system such as playing a certain video file at a pre-arranged time.








## VIA AirTalk Wireless Connectivity Suite Services

VIA AirTalk comprises a suite of wireless broadcasting technologies including sonic sensing, Bluetooth LE, Wi-Fi, and 3G, which enables the creation of location-specific networks in restaurants, stores, museums and galleries, transportation hubs, and other spaces that deliver tailored information to a user's mobile device, opening up exciting new opportunities to liven up experiences with new kinds of interaction and participation.

VIA Embedded offers turnkey app design, content integration and management services that integrate VIA AirTalk wireless technologies to enhance interaction with mobile devices. Customers can also integrate VIA AirTalk with their existing apps by using an SDK package provided by VIA Embedded, as well as take advantage of our in-house software development expertise to improve passenger experiences and engagement.

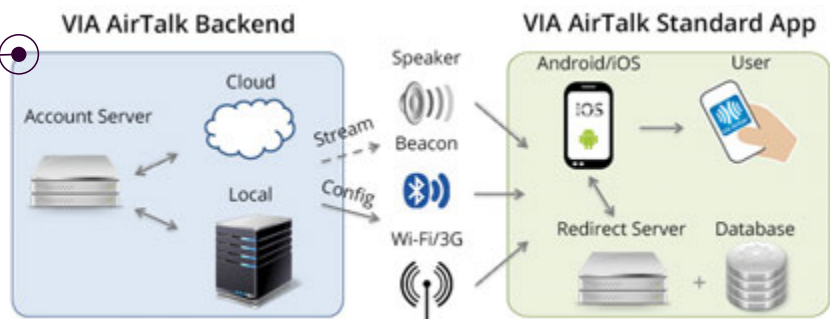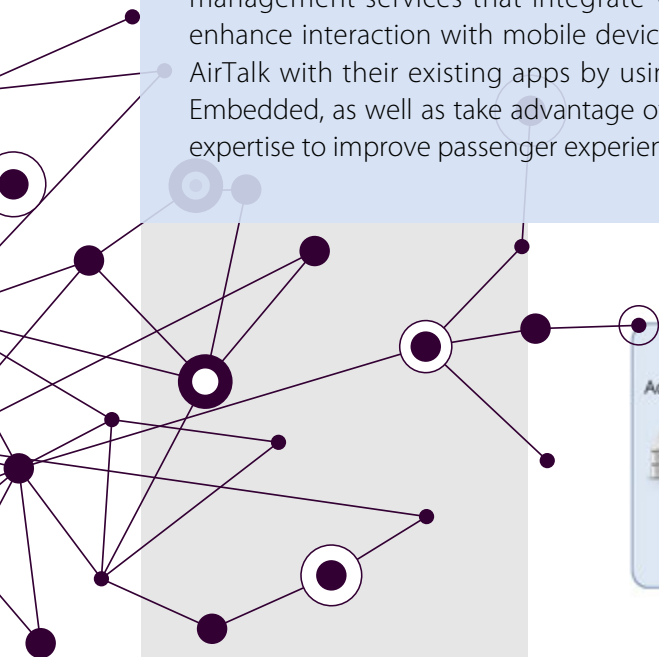





# VIA Embedded ARM Solutions

From low-power, feature-rich small form factor boards to complete turnkey solutions, VIA Embedded provides all the building blocks that embedded designers need to create innovative new devices that unleash the scalability and performance of the ARM architecture and deliver compelling new connected experiences for users.

Combining the most comprehensive line of ARM boards and systems in the industry with proven Android and Linux software customization capabilities, advanced system integration expertise, and rich customer support experience, VIA Embedded not only provides designers with the fastest and most convenient path2production for ARM embedded devices but also enables them to take full advantage of the myriad of exciting new opportunities emerging in the market.







## VIA Embedded ARM Boards

With our comprehensive range of small form factor boards based on market-leading VIA and Freescale SoCs, VIA Embedded provides an unrivaled choice of ultra-reliable and highly-integrated ARM platforms optimized to meet the power, performance, and feature requirements for even the most demanding industrial, signage, HMI, M2M, consumer, and other embedded applications.

Based on the ultra-compact Pico-ITX form factor, VIA Embedded ARM boards combine rich I/O connectivity with exceedingly low power consumption, wide temperature ranges, and advanced multicore processing performance. Built to the highest standards of reliability, the boards also come with up to 7+ years of longevity to support customers with long product life cycles.

To ensure optimum flexibility for software customization and application development, VIA Embedded ARM boards feature a choice of solution packs for Linux and Android, including the VIA Embedded Smart ETK. A comprehensive range of hardware and software engineering services are also available to speed up product development cycles.

## VIA AMOS-800 Series Industrial Fanless Systems

Featuring a choice of multicore Freescale ARM Cortex SoC platforms in compact, fanless, and dust-proof chassis designs, VIA AMOS Series systems provide ultra-powerful and ultra-reliable solutions for a wide variety of industrial M2M and HMI applications, ranging from headless control and sensor systems to highly-integrated controllers and advanced display systems.

In addition to a rich set of I/O and connectivity features and advanced graphics performance, VIA AMOS Series systems are easily expandable and can be customized for a diverse range of embedded applications. The systems are also very low power and support a wide temperature range, making them ideal for the most extreme operating environments.



## VIA ARTiGO A900 Series Fanless Android System

The VIA ARTiGO A900 is an ultra-compact fanless Android system powered by the VIA Elite E1000 dual-core Cortex-A9 processor and features extended I/O and connectivity support. With its advanced onboard graphics and video capabilities, the system is ideally suited for small footprint Android media players and single-screen digital signage installations.



## VIA ALTA DS Series Android Digital Signage Systems

VIA ALTA DS Series systems provide a choice of single-screen and dual-screen all-in-one Android solutions for managing dynamic displays in cost-sensitive, high-volume segments where high-performance video and connectivity are paramount for enhanced customer engagement. Applications range from kiosks, POS systems, and menu boards to TVOIP, cloud streaming, and Digital Out of Home (DOOH) advertising across a broad spectrum of retail, hospitality, education, and entertainment environments.

In addition to a standard Android image, VIA ALTA DS Series systems feature a Signage Starter Kit that provides a set of APIs for the Android application to access services provided by the VIA ALTA DS Series hardware and the Android system itself, serving to speed up development time.

Customers can also leverage innovative digital signage applications provided by VIA Embedded Digital Signage ISV program partners to create customized solutions for their markets.



## VIA Viega Semi-Ruggedized Android Tablet

The VIA Viega is an enterprise-grade 10.1" Android tablet with IP65 rating that has been designed to meet the MIL-STD 810G standard. Sporting a durable yet stylish design that is water-resistant and rugged enough to withstand even the most demanding environments, the VIA Viega delivers exceptional multimedia performance and long battery life. It also comes with a rich set of I/O and connectivity features including Wi-Fi, GPS, Bluetooth 4.0, NFC, optional 3G, and legacy I/O ports, as well as an optional docking station.

A wide range of software customization services is also available, including DMS and security applications.







# VIA Embedded ARM Software Packages and Customization Services

VIA Embedded offers a growing range of software packages and services to enable developers to customize ARM systems and devices using Android or Linux. In addition to Android and Linux Board Support Packages (BSP), we provide a variety of easy-to-use SDKs and services for specialist applications and markets, including the VIA SMART ETK (Embedded Tool Kit), and have extensive experience and expertise in developing software solutions for a wide variety of vertical domains such as digital signage, infotainment, and industrial automation.

## VIA Embedded Android Software Solution Packs and Customization Services:

VIA Embedded provides a wide range of software solution packages and customization services to facilitate the development of Android embedded systems and devices:

- **Applications:** These include the customization of system applications such as the launcher (e.g. no lock screen for embedded apps), system bar (e.g. ability to be set as transparent), and settings menu (e.g. additional network configurations).
- **Kernel & Framework:** These include security (e.g. storage media/user data encryption & secure channel), kernel drivers for special devices, and daemons/services (NFS, Telnet, Modbus, etc) for improved manageability.
- **System Management:** These include watchdog, remote monitoring, remote power on/off, auto wake-up/power off, and silencing the OS and application updates using the VIA SMART ETK.
- **Embedded I/O:** This includes enabling support for legacy I/O, such as GPIO, RS-232, and CAN bus, using the VIA SMART ETK.


## VIA Android SMART ETK

The VIA Android SMART ETK includes a set of APIs that enable the Android application to access I/O and manageability services provided by the system hardware that are not supported in the Android framework. The VIA SMART ETK is also bundled with SMART ETK Demo, which is easy to install and has a user friendly GUI for demonstrating the various functions of VIA Embedded ARM platforms. Both the VIA SMART ETK and SMART ETK Demo are easy-to-use tools that help to shorten development time and speed up time to market.



### Watch Dog:

This provides an API which allows the user to set a timer to ensure proper operation and help the applications/system to recover from a dead circle or breakdown. When it is set, the system will automatically reboot if no "feeding dog" signal is received.



### System Power Off / Reboot:


This provides APIs that allow the user to use an Android application to schedule when the system should power off as well as set periodic reboots to ensure maximum performance is maintained.



### RTC Wake-Up:

This provides an auto power on feature by setting the Remote Time Clock (RTC) auto wake-up timer. The RTC supports three auto wake-up modes:

- Wake-up on a specified hour and minute every day
- Wake-up on a specified day/ hour/ minute every week
- Wake-up on a specified day/ hour/ minute every month



### Legacy I/O Support


The VIA SMART ETK enables legacy I/O support such as RS-232, by opening up GPIO, I<sup>2</sup>C, and CAN bus ports to the application.

## VIA Embedded ARM Software Support Phases

VIA Embedded provides a full range of support services at all stages of the software development process, including a variety of software evaluation kits to give developers the opportunity to test compatibility and functionality with their software.

Once a project is underway, VIA Embedded provides development kits as well as general technical support, including bug fixes and customer and customization services based on specific customer needs. VIA Embedded can also offer application-specific device drivers and programming tools for support in the development phase, as well as certified drivers to meet various safety integrity levels (SIL) and IEC. Well-structured support for middleware and application level development as well as a full range of OS interface support, including both Linux and Android, ensures a smooth software development path and faster time to market.

### Android Software Support Stages

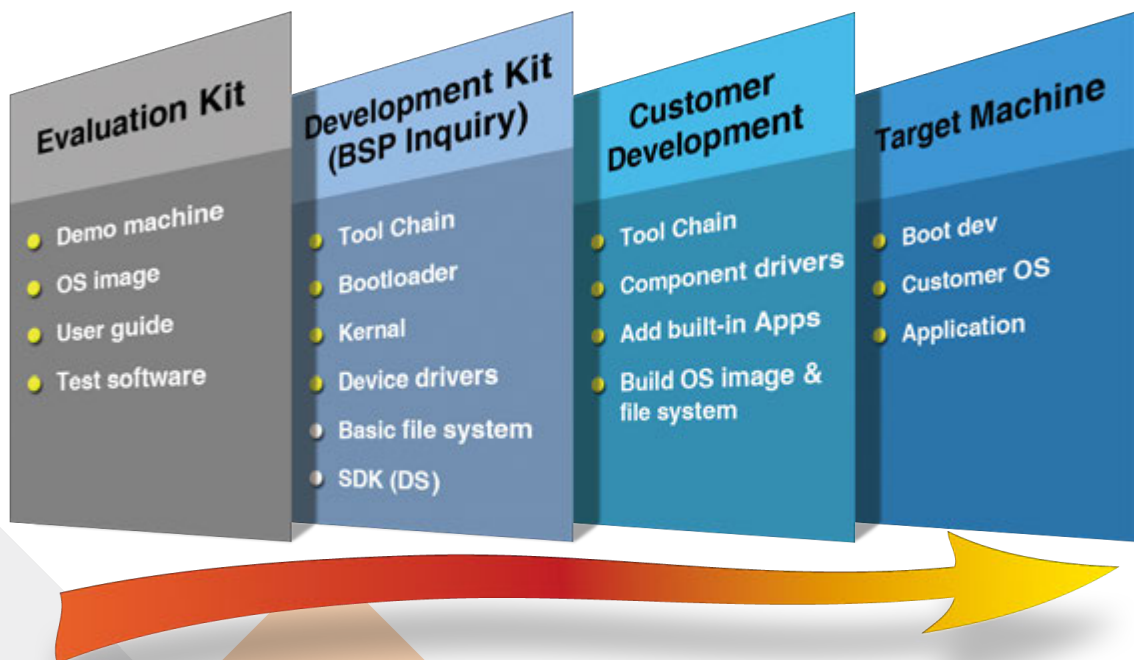

### VIA Embedded ARM Turnkey Services

With our comprehensive line of ARM boards and systems, proven Android and Linux software development and customization capabilities, advanced system integration expertise, and rich customer support experience, VIA Embedded can provide a complete set of ARM turnkey services enabling developers not only to minimize product development costs and times but also to bring innovative new devices to market ahead of their competitors.

### Key Applications

Combining ultra-reliable, feature-rich platforms and systems with flexible software and hardware customization services, VIA Embedded ARM Solutions provide the fast track to creating market-leading products for a myriad of embedded applications ranging from telecommunications, medical and healthcare, home automation, and industrial automation, to a new generation of consumer embedded devices, such as digital signage systems, media controllers, in-vehicle entertainment systems, and connected TVs.



# VIA Embedded ARM Boards

- VAB-1000
- VAB-820
- VAB-800
- VAB-600

# Quick Guide

Model	VAB-1000 <b>NEW</b>	VAB-820	VAB-800	VAB-600
Processor	1.0GHz VIA Elite E1000 Cortex-A9 dual-core SoC	1.0GHz Freescale i.MX 6Quad Cortex-A9 quad-core SoC	800MHz Freescale iMX537 Cortex-A8 SoC	800MHz VIA WM8950 Cortex-A9 SoC
Graphics	3 integrated, independent 3D/2D and video hardware graphics accelerators	3 integrated, independent 3D/2D and video hardware graphics accelerators	2 integrated, independent 3D/2D hardware graphics accelerators	2 integrated, independent 3D/2D hardware graphics accelerators
System Memory	2GB DDR3 SDRAM onboard	1GB DDR3 SDRAM onboard	1GB DDR3 SDRAM onboard	1GB DDR3 SDRAM onboard
Storage	4GB eMMC Flash memory 1 SATA connector Micro SD card slot	4GB eMMC Flash memory Micro SD card slot	4GB eMMC Flash memory 1 SATA connector Micro SD card slot	4GB eMMC Flash memory Micro SD card slot
Audio	Stereo codec	Low power stereo codec	Low power stereo codec	Stereo codec
Display I/O	1 Mini HDMI 1 Dual-CH LVDS	1 HDMI 1 Dual-CH LVDS	1 Mini HDMI 1 VGA 2 Single-CH LVDS	1 Mini HDMI 1 Dual-CH LVDS (with VAB-600-D) 1 TTL (with VAB-600-C)
USB	2 USB 2.0 1 Mini USB 2.0	4 USB 2.0 1 Micro USB 2.0 OTG	4 USB 2.0 1 UBS 2.0 device port	1 USB 2.0 2 Mini USB 2.0
LAN	1 Gigabit Ethernet	1 Gigabit Ethernet	1 10/100Mbps Ethernet	1 10/100Mbps Ethernet
COM	2 (TX/RX)	2 (one TX/RX)	2 (one TX/RX)	2 (TX/RX)
Digital I/O	4 GPIO	8 GPIO	8 GPIO	8 GPIO
CAN bus	N/A	2	2	N/A
Expansion I/O	1 miniPCIe	1 miniPCIe	N/A	1 miniPCIe slot (USB only)
Extension Cards	VAB-1000-T I/O card VAB-1000-L LVDS card	N/A	N/A	VAB-600-A I/O card VAB-600-B for 4 COM ports VAB-600-C TTL converter VAB-600-D LVDS converter
Power Supply	12V DC-in	12V DC-in	5V DC-in	12V ~ 24V DC-in
Operating System	Android 4.4.2	Android 4.4.2 Linux kernel 3.10	Android 2.3 Linux kernel 2.6.35 WEC7	Android 4.0.3 Linux kernel 3.0.8
Operating Temperature	0°C ~ 60°C	-20°C ~ 70°C	0°C ~ 60°C -40°C ~ 85°C (optional)	0°C ~ 60°C
Optional Accessories	EMIO-1533 USB Wi-Fi EMIO-2550 3G	EMIO-1533 USB Wi-Fi EMIO-2550 3G	EMIO-1533 USB Wi-Fi	EMIO-1533 USB Wi-Fi EMIO-2550 3G
Applications	Digital signage, digital media applications	Industrial automation, M2M, transportation	Digital signage, M2M, industrial control	Smart display, POS, Kiosk, M2M

## ARM-based Pico-ITX Series


**NEW**

# VIA VAB-1000

Advanced graphics and video capabilities with a rich I/O feature set for interactive multimedia applications

### Features

- Compact 10cm x 7.2cm Pico-ITX form factor
- 1.0GHz VIA Elite E1000 Cortex-A9 dual-core SoC
- Dual display support including full HD content and dual channel LVDS
- Graphics Powerhouse
- Android software solution pack available

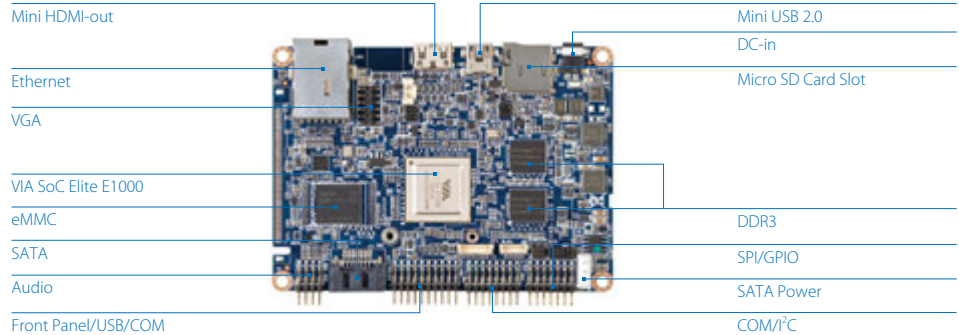

### Specifications

<b>Model Name</b>	<b>VAB-1000</b>
<b>Processor</b>	1.0GHz VIA Elite E1000 Cortex-A9 dual-core SoC
<b>System Memory</b>	2GB DDR3 SDRAM onboard
<b>Storage</b>	4GB eMMC Flash memory 1 SATA connector
<b>Graphics</b>	3 integrated, independent 3D/2D and video processing units Graphics engine supporting OpenGL <sup>®</sup> ES 3.0 hardware acceleration Supports MPEG-2, VC-1 and H.264 video decoding up to 1080p
<b>LAN</b>	Realtek RTL8111G Gigabit Ethernet controller
<b>Audio</b>	Wolfson WM8960 Audio Codec
<b>HDMI</b>	Integrated HDMI 1.4 transmitter
<b>Expansion I/O</b>	1 miniPCIe slot
<b>Onboard I/O</b>	1 SATA connector 1 SATA power connector with +12V/+5V select jumper for SSD 1 USB pin header for Wi-Fi module 1 Dual-channel 18/24-bit LVDS panel connector 1 Front panel pin header for 2 USB 2.0 ports, 1 COM (TX/RX) port, power-on and 2 activity LED indicators 1 Miscellaneous pin header for 2 COM (TX/RX) ports and 3 I <sup>2</sup> C 1 Miscellaneous pin header for Digital I/O (4 GPIO) 1 JTAG pin header (for debugging) 1 SPI Flash pin header 1 Audio pin header for Line-in, Line-out, Mic-in 1 miniPCIe slot
<b>Front Panel I/O (with VAB-1000-T)</b>	2 USB 2.0 ports 3 Audio jacks: Line-in, Line-out and Mic-in 1 Power on/off button with built-in LED 1 SSD activity LED indicator 1 USB/COM LED indicator
<b>Back Panel I/O</b>	1 Mini USB 2.0 port 1 Mini HDMI 1 Gigabit Ethernet port 1 Micro SD card slot 1 DC-in jack
<b>Power Supply</b>	12V DC-in
<b>Operating System</b>	Android 4.4.2
<b>Operating Temperature</b>	0°C ~ 60°C
<b>Operating Humidity</b>	0% ~ 95% (non-condensing)
<b>Form Factor</b>	Pico-ITX (10cm x 7.2cm, 3.9" x 2.8")
<b>Compliance</b>	CE, FCC

VIA Embedded  
ARM Boards


VIA Embedded  
ARM Systems

VIA Embedded  
x86 Boards


VIA Embedded  
x86 Systems

VIA Embedded  
Accessories

## Back Panel I/O

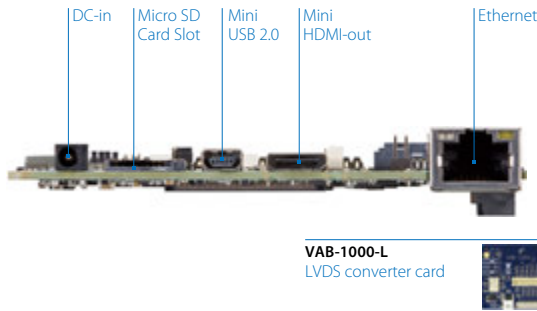

## Accessories

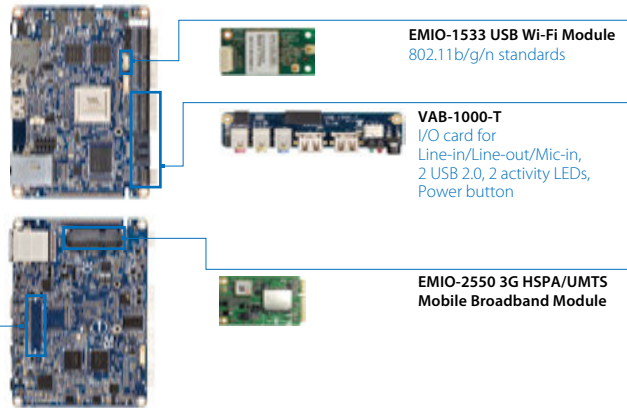

## Ordering Information

Part Number	CPU Frequency	Description
10GBL100200A0	VIA Elite E1000 @ 1.0GHz	Pico-ITX board with 1.0GHz VIA Elite E1000 Cortex-A9 dual-core SoC, 4GB eMMC, 2GB DDR3 SDRAM, Mini HDMI, LVDS, 2 USB 2.0, Mini USB 2.0, COM, Gigabit Ethernet, Micro SD card slot, miniPCIe slot, 12V DC-in (Packed with VAB-1000-T I/O card)

## Optional Accessories


### I/O Expansion Cards

Part Number	Description
10GBN0000020	VAB-1000-L LVDS converter card
10GBQ0000020	VAB-1000-T I/O card for Line-in/Line-out/Mic-in, 2 USB 2.0, 2 activity LEDs, Power button

### Wireless Modules

Part Number	Description
EMIO-1533-00A2	VNT9271 IEEE 802.11 b/g/n USB Wi-Fi module with assembly kit
EMIO-2550-00A1	Ublox 3.75G HSPA/UMTS mobile broadband full size miniPCIe module with GPS and SIM card slot (*Note: GPS function is not currently supported for VAB-1000)

## Block Diagram

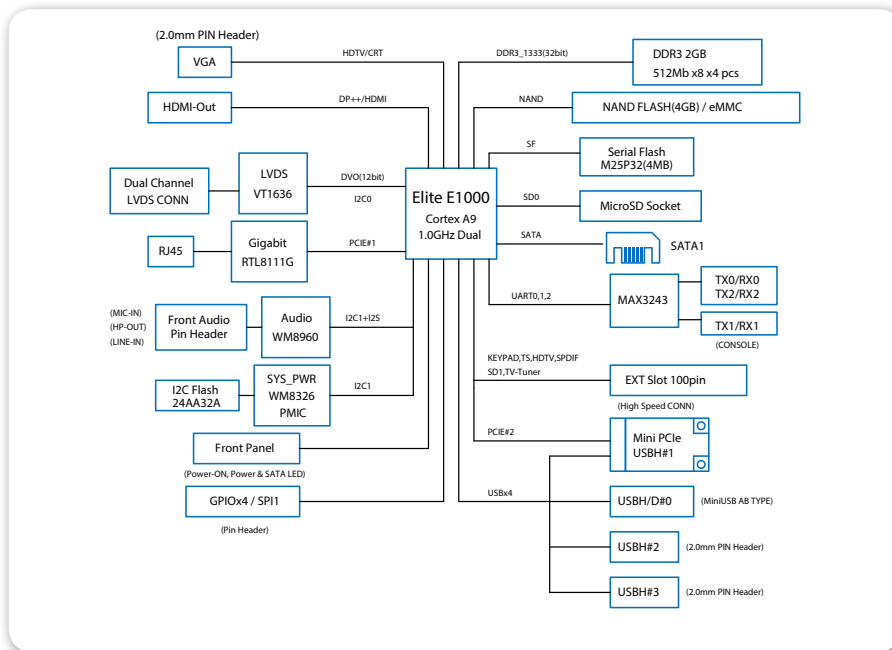

## Packing List

Items
VAB-1000 board
VAB-1000-T I/O card
Screw pack for miniPCIe card
COM cable



## ARM-based Pico-ITX Series


# VIA VAB-820

Low power quad-core platform with advanced multimedia capabilities for a wide variety of industrial applications

### Features

- Compact 10cm x 7.2cm Pico-ITX form factor
- 1.0GHz Freescale i.MX 6Quad Cortex-A9 quad-core SoC
- Flawless HD video performance up to 1080p
- Wide operating temperature range, -20°C ~ 70°C
- Linux and Android solution packs available

### Board Placement

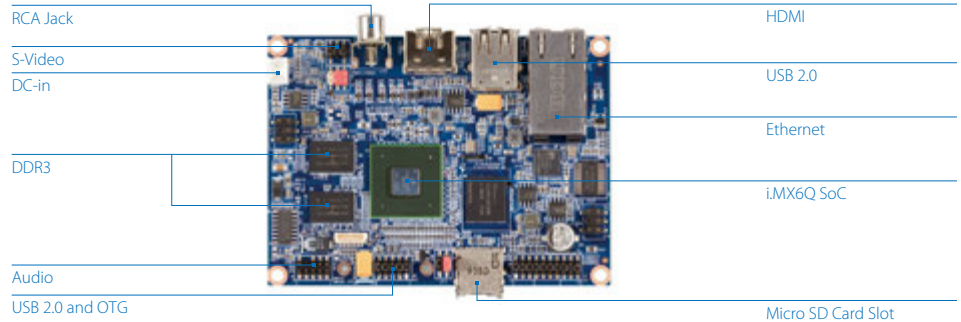


### Specifications

<b>Model Name</b>	<b>VAB-820</b>
<b>Processor</b>	1.0GHz Freescale i.MX 6Quad Cortex-A9 quad-core SoC
<b>System Memory</b>	1GB DDR3 SDRAM onboard
<b>Storage</b>	4GB eMMC Flash memory
<b>Boot Loader</b>	4MB SPI Flash ROM
<b>Graphics</b>	Vivante GC2000 GPU 3 integrated, independent 3D/2D and video graphics processing units Graphics engine supporting OpenGL® ES 2.0, OpenCL and OpenVG™ 1.1 hardware acceleration Supports MPEG-2, VC-1 and H.264 video decoding up to 1080p Supports SD encoding
<b>LAN</b>	Micrel KSZ9031RNX Gigabit Ethernet transceiver with RGMII support
<b>Audio</b>	Freescale SGLT5000 low power stereo codec
<b>HDMI</b>	Integrated HDMI 1.4 transmitter
<b>USB</b>	SMSC USB2514 USB 2.0 high speed 4-port hub controller
<b>Expansion I/O</b>	1 miniPCIe slot
<b>Onboard I/O</b>	1 USB 2.0 host port, and 1 USB2.0 OTG port pin header 1 COM port connector with power supply (supports 8-wire DTE mode) 1 COM/CAN port connector with power supply (supports 1 RS-232 (TX/RX) and 2 FlexCAN TX/RX ports) 1 Dual-channel 18/24-bit LVDS panel connector 1 Miscellaneous pin header for 1 I <sup>2</sup> C pair, 1 Digital I/O (4 GPI + 4 GPO), system reset button and LEDs for power/WPAN/Wi-Fi/WWAN 1 RTC battery connector 1 MIPI CSI-2 connector (supports 2 data lanes) 1 SPI master pin header (supports 2 SPI slave devices) 1 S-video input pin header 2 Power pin headers (support optional PD power board) 1 Boot Flash select pin header (for SPI or micro SD) 1 Front audio pin header for Line-in, Line-out, Mic-in 1 DC-in connector 1 miniPCIe slot (supports multiple connections and buses including JTAG)
<b>Front Panel I/O</b>	1 Micro SD card slot
<b>Back Panel I/O</b>	2 USB 2.0 ports 1 HDMI port 1 Composite input RCA jack 1 Gigabit Ethernet port (supports optional IEEE 802.3 at type 2)
<b>Watch Dog Timer</b>	Integrated watch dog timer supports two comparison points. Each comparison point can interrupt ARM core, 2nd comparison point capable of generating external interrupts on WDOG line
<b>Power Supply</b>	12V DC-in
<b>Operating System</b>	Android 4.4.2, Linux kernel 3.10
<b>Operating Temperature</b>	-20°C ~ 70°C (3G & WiFi not included)
<b>Operating Humidity</b>	0% ~ 95% (non-condensing)
<b>Form Factor</b>	Pico-ITX (10cm x 7.2cm, 3.9" x 2.8")
<b>Compliance</b>	CE, FCC




VIA Embedded  
ARM Boards  
VIA Embedded  
ARM Systems  
VIA Embedded  
x86 Boards  
VIA Embedded  
x86 Systems  
VIA Embedded  
Accessories

## Back Panel I/O

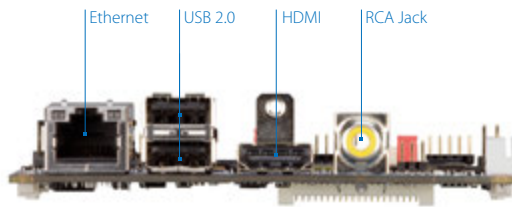

## Accessories

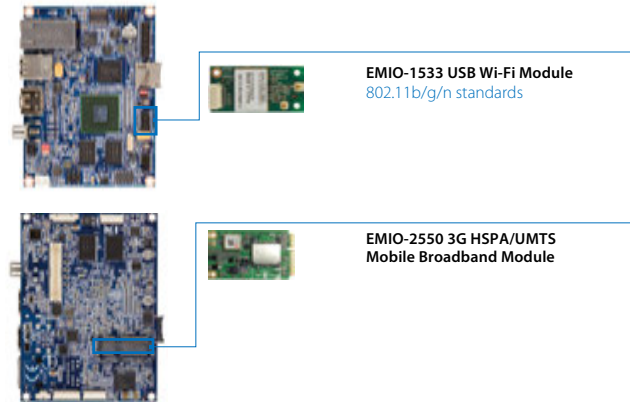


## Ordering Information

Part Number	CPU Frequency	Description
10GBF105000A0	Freescle i.MX 6Quad @ 1.0GHz	Pico-ITX board with 1.0GHz Freescle i.MX 6Quad Cortex-A9 quad-core SoC, 4GB eMMC, 4MB SPI Flash ROM, 1GB DDR3 SDRAM, HDMI, LVDS, 4 USB 2.0, OTG USB 2.0, COM, Gigabit Ethernet, miniPCIe, S-video, Micro SD card slot, 2 CAN bus, 12V DC-in

## Optional Accessories

Wireless Modules	
Part Number	Description
EMIO-1533-00A2	VNT9271 IEEE 802.11 b/g/n USB Wi-Fi module with assembly kit
EMIO-2550-00A1	Ublox 3.75G HSPA/UMTS mobile broadband full size miniPCIe module with GPS and SIM card slot

## Block Diagram

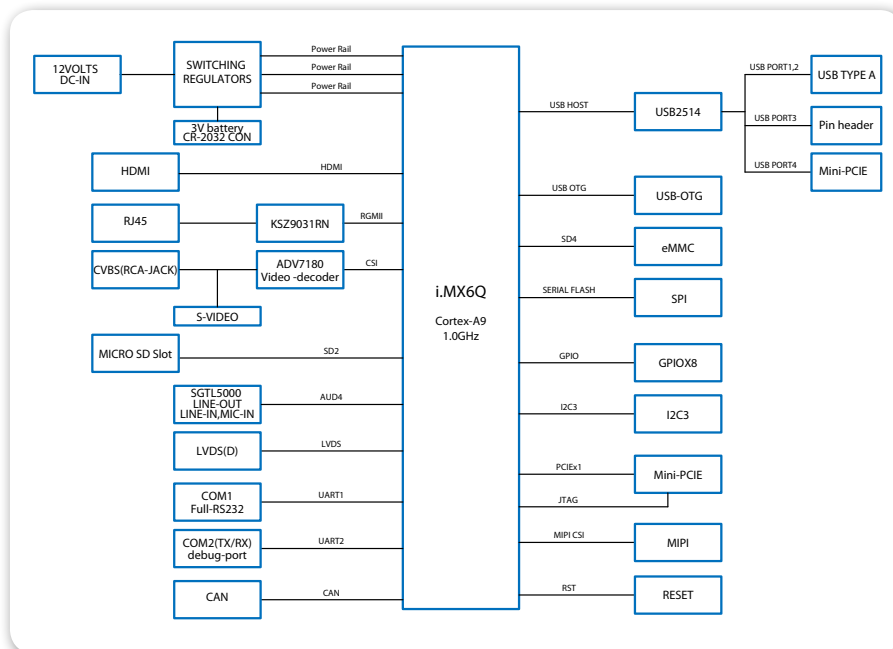

## Packing List

Items
DC power cable
Debug COM cable
Audio cable
2-port USB cable

## ARM-based Pico-ITX Series

# VIA VAB-800


Ultra-reliable low power platform for in-vehicle, surveillance, and industrial applications

### Features

- Compact 10cm x 7.2cm Pico-ITX form factor
- 800MHz Freescale i.MX537 Cortex-A8 SoC
- Supports two single-channel 18/24-bit LVDS
- Supports dual CAN bus and dual COM ports
- Wide operating temperature range, -40°C ~ 85°C
- Android, Linux, and WEC7 solution packs available



### Board Placement

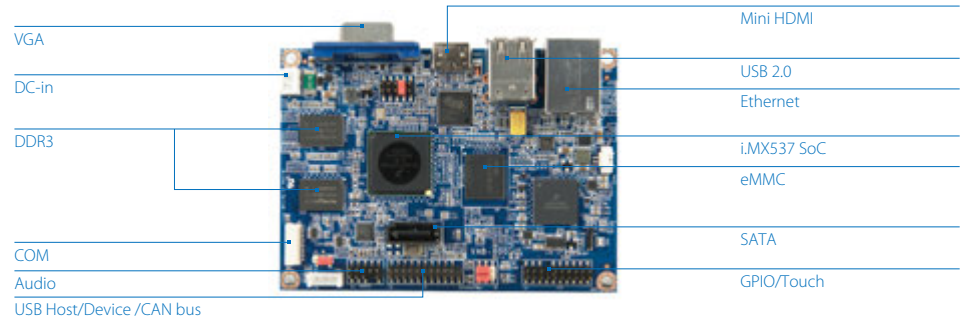

### Specifications

Model Name	VAB-800
<b>Processor</b>	800MHz Freescale i.MX537 Cortex-A8 SoC
<b>System Memory</b>	1GB DDR3 SDRAM onboard
<b>Storage</b>	4GB eMMC Flash memory 1 SATA connector
<b>Graphics</b>	AMD Z430 GPU 2 integrated, independent 3D/2D graphics processing units Graphics engine supporting OpenGL® ES 2.0 and OpenVG™ 1.1 hardware acceleration Supports MPEG-2, VC-1 and H.264 video decoding up to 1080p
<b>LAN</b>	SMSC LAN8720A 10/100 PHY transceiver with HP Auto-MDIX support
<b>Audio</b>	Freescale SGT5000 low power stereo codec
<b>HDMI</b>	Silicon image SiI9024A HDMI transmitter
<b>USB</b>	SMSC USB2514 USB 2.0 high speed 4-port hub controllers
<b>CAN</b>	TI SN65HVD1050 EMC optimized CAN transceiver
<b>Onboard I/O</b>	1 SATA connector with voltage select jumper for DOM 1 SATA power supply connector for 2.5" HDD/SSD 1 Miscellaneous pin header for 2 USB 2.0 ports, 1 USB device port, 2 CAN bus ports, system power-on and reset 2 COM port connectors with power supply (one supports 8-wire DCE mode, another supports 2-wire for debug) 1 Miscellaneous pin header for 4-wire resistive touch screen interface, I <sup>2</sup> C and Digital I/O (4 GPI + 4 GPO) 2 Single-channel 18/24-bit LVDS panel connectors 1 Micro SD card slot 1 RTC battery connector 1 JTAG pin header (for debugging) 1 Boot Flash select pin header for eMMC or SD 1 Front audio pin header for Line-in, Line-out, Mic-in 1 DC-in connector
<b>Back Panel I/O</b>	2 USB 2.0 ports 1 Mini HDMI port 1 VGA port 1 10/100M Ethernet port
<b>Watch Dog Timer</b>	Integrated watch dog timer supports two comparison points. Each comparison point can interrupt ARM core, 2nd comparison point capable of generating external interrupts on WDOG line
<b>Power Supply</b>	5V DC-in
<b>Operating System</b>	Android 2.3, Linux kernel 2.6.35
<b>Operating Temperature</b>	Commercial grade: 0°C to 60°C Industrial grade: -40°C to 85°C (optional)
<b>Operating Humidity</b>	0% ~ 95% (non-condensing)
<b>Form Factor</b>	Pico-ITX (10cm x 7.2cm, 3.9" x 2.8")
<b>Compliance</b>	CE, FCC

VIA Embedded  
ARM Boards


VIA Embedded  
ARM Systems

VIA Embedded  
x86 Boards

VIA Embedded  
x86 Systems

VIA Embedded  
Accessories

## Back Panel I/O

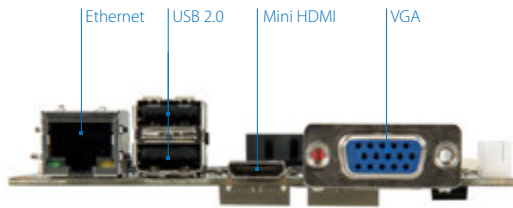

## Accessories



**EMIO-1533 USB Wi-Fi Module**  
802.11b/g/n standards

## Ordering Information


Part Number	CPU Frequency	Description
Commercial grade: 10GZ9084000A0	Freescle iMX537 @ 800MHz	Pico-ITX board with 800MHz Freescle Cortex-A8 SoC, 4GB eMMC, 1GB DDR3 SDRAM, Mini HDMI, VGA, 2 LVDS, 5 USB 2.0, 2 COM, 10/100Mbps Ethernet, SATA, 2 CAN bus, 5V DC-in
Industrial grade: 10GZ9084400A0	Freescle iMX537 @ 800MHz	Pico-ITX Board with 800MHz Freescle Cortex-A8 SoC, 4GB eMMC, 1GB DDR3 SDRAM, Mini HDMI, VGA, 2 LVDS, 5 USB 2.0, 2 COM, 10/100Mbps Ethernet, SATA, 2 CAN bus, 5V DC-in

## Optional Accessories

### Wireless Modules

Part Number	Description
EMIO-1533-00A2	VNT9271 IEEE 802.11 b/g/n USB Wi-Fi module with assembly kit

## Block Diagram

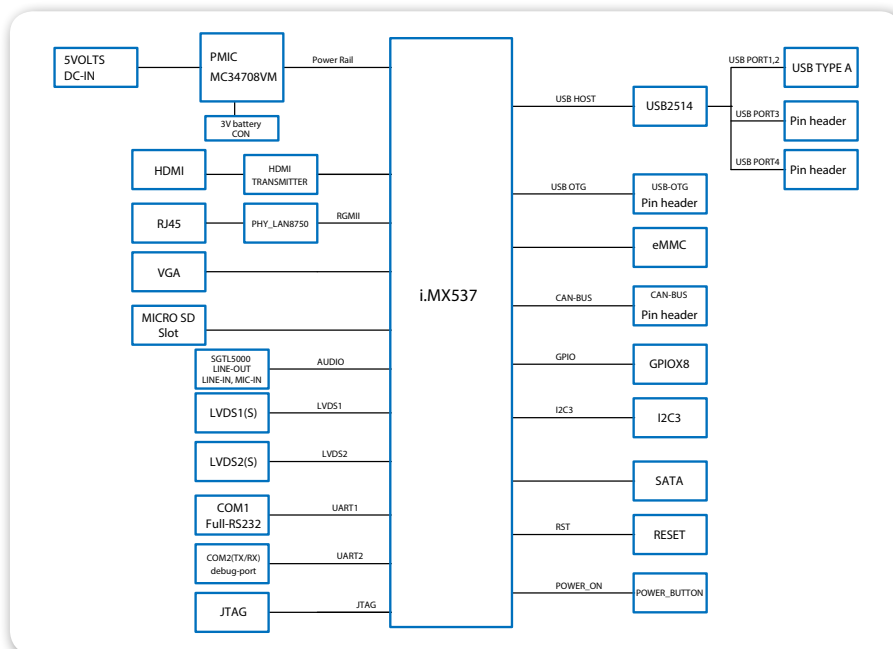

## Packing List

### Items

- DC power cable
- Debug COM cable
- Audio cable
- 2-port USB cable

## ARM-based Pico-ITX Series


# VIA VAB-600

Flexible low-power platform for a broad range of interactive multimedia applications

### Features

- Compact 10cm x 7.2cm Pico-ITX form factor
- 800MHz VIA Cortex-A9 SoC
- Support for two COM ports (TX/RX)
- Optional Wi-Fi module
- Android and Linux software solution packs available

### Board Placement

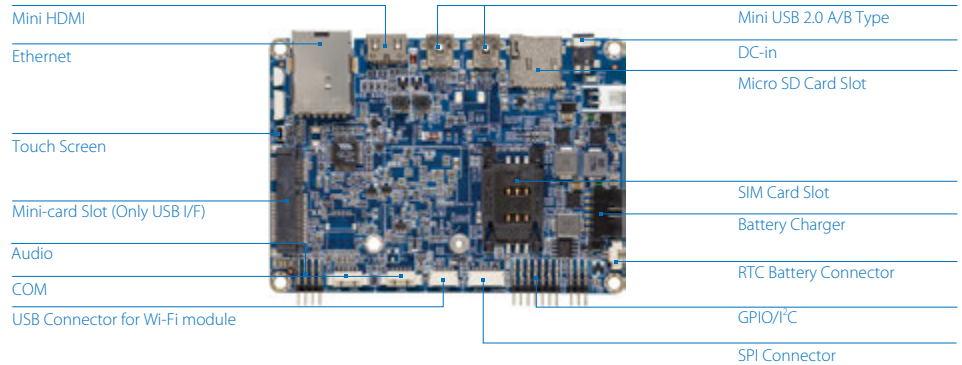


### Specifications

<b>Model Name</b>	<b>VAB-600</b>
<b>Processor</b>	800MHz VIA Cortex-A9 SoC
<b>System Memory</b>	1GB DDR3 SDRAM onboard
<b>Storage</b>	4GB eMMC Flash memory
<b>Boot Loader</b>	512KB SPI Flash ROM
<b>Graphics</b>	Mali-400 SP GPU 2 integrated, independent 3D/2D graphics processing units Graphics engine supporting OpenGL® ES 2.0 hardware acceleration Supports MPEG-2, VC-1 and H.264 video decoding up to 1080p
<b>LAN</b>	VIA VT6113 10/100 base-TX PHY chip
<b>Audio</b>	VIA VT1603A I2S Audio Codec
<b>HDMI</b>	Integrated HDMI 1.4 transmitter
<b>Expansion I/O</b>	1 miniPCIe slot (supports USB 2.0 connectivity for optional 3G module)
<b>Onboard I/O</b>	1 USB 2.0 connector 1 DVO connector for TTL or LVDS display (corresponding daughter card required) 2 COM port connectors (TX/RX) 1 Miscellaneous pin header for 1 I <sup>2</sup> C pair and 1 DIO (4 GPI + 4 GPO) 1 SIM card slot (supports 3G module without built-in SIM card slot) 1 RTC battery pin header 1 Keypad connector 1 CIR connector 1 SPI Flash pin header 1 Front panel pin header for system power-on, reset and power LED 1 4-wire resistive touch screen FPC connector (through VT1603A) 1 Front audio pin header for Line-out, Mic-in 1 DC-in connector 1 Battery charger connector with smart battery function (manufacturing option) 1 miniPCIe slot (supports USB 2.0 connectivity for optional 3G module)
<b>Back Panel I/O</b>	2 Mini USB 2.0 ports 1 Mini HDMI port 1 10/100Mbps Ethernet port 1 Micro SD card slot 1 DC-in jack
<b>Operating System</b>	Android 4.0, Linux kernel 3.0.8
<b>Power Supply</b>	12V ~ 24V DC-in
<b>Operating Temperature</b>	0°C ~ 60°C
<b>Operating Humidity</b>	0% ~ 95% (non-condensing)
<b>Form Factor</b>	Pico-ITX (10cm x 7.2cm, 3.9" x 2.8")
<b>Compliance</b>	CE, FCC






## Back Panel I/O

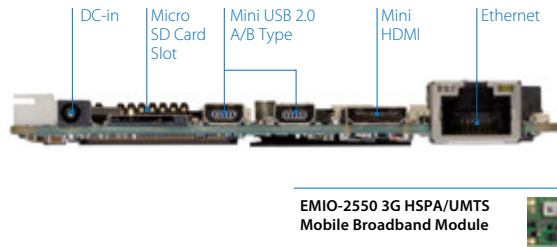

## Accessories

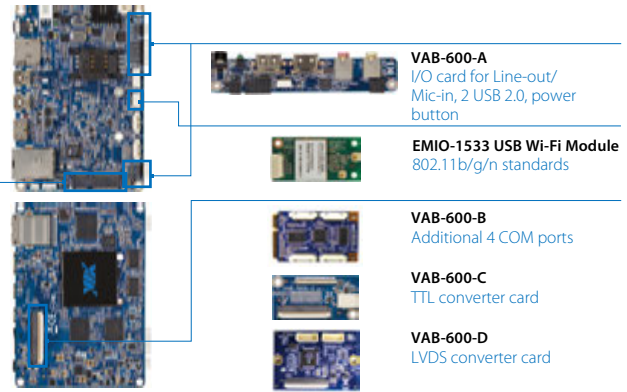

**EMIO-2550 3G HSPA/UMTS  
Mobile Broadband Module**

## Ordering Information

Part Number	CPU Frequency	Description
10GAU082000A0	VIA Cortex-A9 @ 800MHz	Pico-ITX board with 800MHz VIA Cortex-A9 SoC, 4GB eMMC, 512KB SPI Flash ROM, 1GB DDR3 SDRAM, Mini HDMI, 2 Mini USB 2.0, 2 COM, 10/100Mbps Ethernet, 12V ~ 24V DC-in

## Optional Accessories


### I/O Expansion Cards

Part Number	Description
10GAX00000020	VAB-600-A I/O card for Line-out/Mic-in, 2 USB 2.0, Power button
10GAZ00000020	VAB-600-B I/O card for additional 4 COM ports
10GBC00000020	VAB-600-C TTL converter card
10GBD00000020	VAB-600-D Dual-CH LVDS converter card

### Wireless Modules

Part Number	Description
EMIO-1533-00A2	VNT9271 IEEE 802.11 b/g/n USB Wi-Fi module with assembly kit
EMIO-2550-01A1	Ublox 3.75G HSPA/UMTS mobile broadband full size miniPCIe module

## Block Diagram

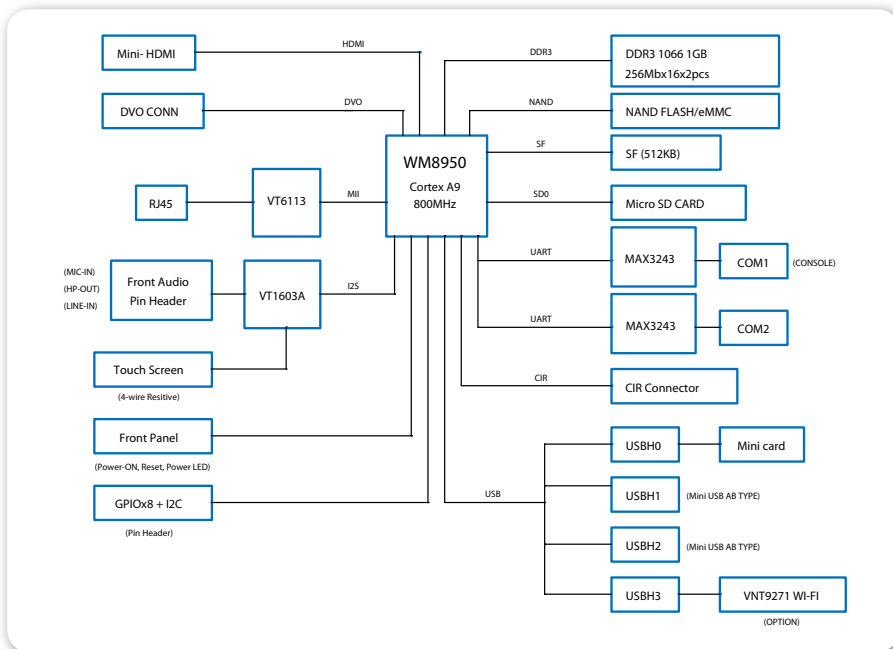

## Packing List

Items
VAB-600 board
DC-in cable
Front panel cable
Front audio cable
COM connector cable
USB cable (for optional Wi-Fi USB module)

### Items for Starter Kit

VAB-600 board
VAB-600-A
VAB-600-D (with cable) (optional)
Keypad cable
GPIO/I <sup>2</sup> C cable
Front panel cable
Front audio cable
COM cable
AC-to-DC adapter
DC-in cable
Mini USB cable
USB cable (for Wi-Fi USB module)
7" LVDS panel (with cable) (optional)

# VIA Embedded ARM Systems

- Viega Tablet
- AMOS-820
- AMOS-800
- ALTA DS 2
- ALTA DS
- ARTiGO A900

# Quick Guide

	Mobile Solutions		Industrial	
Model	Viega Tablet	AMOS-820	AMOS-800	
Processor	1.2GHz VIA Cortex-A9 dual-core SoC	1.0GHz Freescale i.MX 6Quad Cortex-A9 quad-core SoC	800MHz Freescale i.MX537 Cortex-A8 SoC	
Graphics	2 integrated, independent 3D/2D hardware graphics accelerators	3 integrated, independent 3D/2D and video hardware graphics accelerators	2 integrated, independent 3D/2D hardware graphics accelerators	
System Memory	1GB DDR3 SDRAM onboard	1GB DDR3 SDRAM onboard	1GB DDR3 SDRAM onboard	
Storage	16G eMMC Flash memory 1 Micro SD card slot	4GB eMMC Flash memory 1 Micro SD card slot	4GB eMMC Flash memory 1 Micro SD card slot	
Audio	Headphone jack	Low power stereo codec	Low power stereo codec	
Display I/O	1 Micro HDMI	1 HDMI 1 Composite video-in	1 HDMI 1 VGA	
USB	2 Micro USB 2.0	3 USB 2.0 1 Micro USB 2.0 OTG	3 USB 2.0	
LAN	N/A	1 Gigabit Ethernet	10/100Mbps Ethernet	
COM	1 (optional)	2 (one TX/RX)	2 (one TX/RX)	
Digital I/O	N/A	8 (4 GPI + 4 GPO)	8 (4 GPI + 4 GPO)	
CAN bus	N/A	2	1	
Expansion I/O	3G WCDMA (optional) SIM card slot	1 miniPCIe Slot	N/A	
Power Supply	12V DC-in	12V DC-in	5V DC-in	
Operating System	Android 4.4.2	Android 4.4.2 Linux kernel 3.10	Android 2.3 Linux kernel 2.6.35 WEC7	
Operating Temperature	-10°C ~ 50°C	-20°C ~ 65°C	-40°C ~ 80°C	
Optional Accessories	1 Docking stand for battery charger, magnetic swipe reader and headset (optional)	VNT9271 USB Wi-Fi dongle EMIO-2550 3G	VNT9271 USB Wi-Fi dongle EMIO-1533 USB Wi-Fi	
Applications	Digital signage, POS, IPC	Industrial automation, M2M, transportation	Digital signage, M2M, industrial control	

# Quick Guide

Model	Android Signage Solutions		
	ALTA DS 2	ALTA DS	ARTiGO A900
Processor	1.0GHz VIA Elite E1000 Cortex-A9 dual-core SoC	800MHz VIA Cortex-A9 SoC	1.0GHz VIA Elite E1000 Cortex-A9 dual-core SoC
Graphics	3 integrated, independent 3D/2D and video hardware graphics accelerators	2 integrated, independent 3D/2D hardware graphics accelerators	3 integrated, independent 3D/2D and video hardware graphics accelerators
System Memory	2GB DDR3 SDRAM onboard	1GB DDR3 SDRAM onboard	2GB DDR3 SDRAM onboard
Storage	4GB eMMC Flash memroy 1 SD card slot Supports 1 2.5" SATA HDD/SSD (optional)	4GB eMMC Flash memory 1 SD card slot	4GB eMMC Flash memory 1 mSATA slot
Audio	Stereo codec	Stereo codec	Stereo codec
Display I/O	2 HDMI-out (1 optional)	1 HDMI 1 VGA (optional)	1 Mini HDMI
USB	2 USB 2.0 2 Mini USB 2.0	4 USB 2.0	3 USB 2.0 1 Mini USB 2.0
LAN	1 Gigabit Ethernet	10/100Mbps Ethernet	1 Gigabit Ethernet
COM	N/A	N/A	1 (RS232/485)
Digital I/O	N/A	N/A	4 (2 GPI + 2 GPO)
CAN bus	N/A	N/A	N/A
Expansion I/O	N/A	N/A	1 miniPCIe slot
Power Supply	12V DC-in	12V DC-in	12V DC-in
Operating System	Android 4.3	Android 4.0.3 Linux kernel 3.0.8	Android 4.3
Operating Temperature	0°C ~ 40°C	0°C ~ 40°C	-5°C ~ 50°C
Optional Accessories	VNT9271 USB Wi-Fi dongle VESA mount cradle	VNT9271 USB Wi-Fi dongle VESA mount cradle	VNT9271 USB Wi-Fi dongle EMIO-2550 3G
Applications	Digital signage	Digital signage	Digital signage, digital media application

VIA Embedded  
ARM Boards

VIA Embedded  
ARM Systems

VIA Embedded  
x86 Boards

VIA Embedded  
x86 Systems

VIA Embedded  
Accessories



## VIA Viega Tablet

Semi-ruggedized embedded Android 10.1" tablet with IP65 rating and long battery life



### Features


- High-performance VIA Cortex-A9 dual-core SoC
- Ruggedized design to meet MIL-STD 810G and IP65 water resistance standards
- Corner guards for anti-vibration and shock protection
- Customized Android software development
- Long-life polymer battery pack with up to 6hrs runtime

### Specifications

Model Name	Viega Tablet
<b>Processor</b>	1.2GHz VIA Cortex-A9 dual-core SoC
<b>System Memory</b>	1GB DDR3 SDRAM onboard
<b>Storage</b>	16GB eMMC Flash memory
<b>Boot Loader</b>	512KB SPI Flash ROM
<b>Graphics</b>	ARM Mali-400 DP GPU 2 integrated, independent 3D/2D graphics processing units Graphics engine supporting OpenGL® ES 2.0 hardware acceleration Supports MPEG-2, VC1, H.264 and VP8 video decoding up to 1080p
<b>Sensors</b>	ALS and PS support G sensor E compass
<b>Connectivity</b>	Wi-Fi 802.11b/g/n Bluetooth 4.0 NFC Type 1/2/3/4 GPS support (optional) 3G WCDMA up to 2100MHz (optional)
<b>Audio</b>	Headphone Jack Internal stereo speaker and microphone
<b>Camera</b>	2M Front camera 5M Rear camera with auto focus support (optional)
<b>Speaker</b>	1.5W stereo speaker inside
<b>I/O Ports</b>	2 Micro USB 2.0 ports - 1 for USB - 1 for 12V DC-in / COM / Earphone jack 1 Micro HDMI 1 2MP front camera 1 5MP rear camera with auto focus support (optional) 1 Micro SIM card slot 1 Micro SD card slot 1 Stereo speaker inside 1 Power on/off button 1 Pogo pin connector
<b>Display</b>	10.1" LCD with LED backlight panel 1280x800 resolution Display active area: 217mm x 136mm
<b>Power Supply</b>	Battery pack support @ DC 7.4V Charge by AC adapter with 12V DC-in or docking station Max runtime: 6hrs Max sleep time: 9hrs Max suspend time: 14 days (optional feature)
<b>Operating System</b>	Android 4.4.2
<b>Operating Temperature</b>	-10°C ~ 50°C
<b>Relative Humidity</b>	5 ~ 95% @ 40°C (non-condensing)
<b>Storage Temperature</b>	-20°C ~ 70°C



## All Sides External I/O

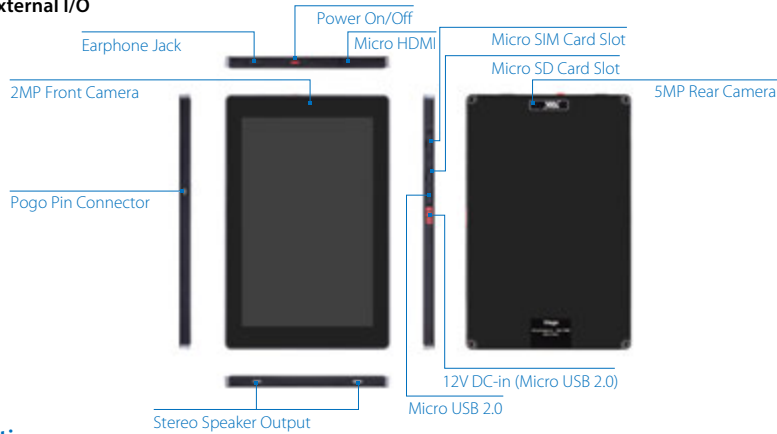


## Specifications

<b>Model Name</b>	<b>Viega Tablet</b>
<b>Dimensions</b>	265mm(W) x 12mm(H) x 171mm(D) (10.4" x 0.47" x 6.73")
<b>Weight</b>	0.75kg (1.65lbs)
<b>Docking Station</b>	1 Docking stand with Pogo pin interface for battery charger, Magnetic Swipe Reader (MSR) and handset (optional)
<b>Compliance</b>	CE, FCC

## Ordering Information

Part Number	System Built-in CPU	Description
VT60810013001-T	1.2GHz VIA Cortex-A9 dual-core	10.1" tablet with 1GB DDR3 RAM, 16GB eMMC, 2MP front camera, Micro HDMI, 2 Micro USB 2.0, Micro SIM card slot, Micro SD card slot, built-in Wi-Fi
VT60810013003-T	1.2GHz VIA Cortex-A9 dual-core	10.1" tablet with 1GB DDR3 RAM, 16GB eMMC, 2MP front camera, 5MP rear camera, Micro HDMI, 2 Micro USB 2.0, Micro SIM card slot, Micro SD card slot, built-in Wi-Fi, GPS and 3G module

## Dimensions

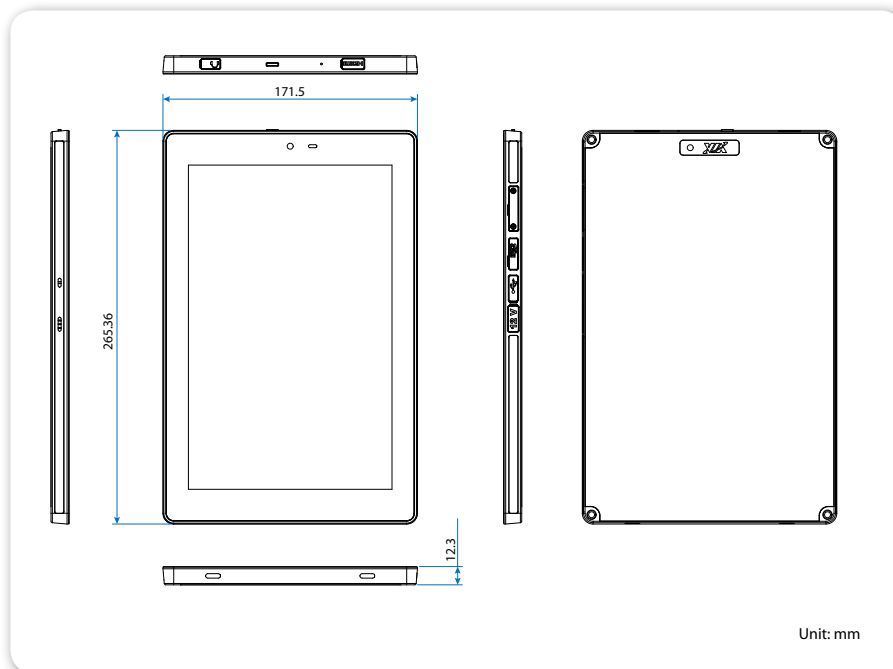

## Packing List

- 10.1" Viega tablet
- AC-to-DC adapter
- Power cord (US)
- Micro HDMI to HDMI adapter
- Micro USB to USB cable
- DC jack cable
- 4 Corner guard protectors

VIA  
**AMOS-820**

Fanless ultra-compact quad-core ARM system ruggedized for extreme environments



**Features**


- 1.0GHz Freescale™ i.MX 6Quad Cortex-A9 quad-core SoC
- Power over Ethernet (PoE) option
- Wide operating temperature range, -20°C ~ 65°C
- Legacy I/O support including dual CAN bus, dual COM, and GPIO
- Android and Linux solution packs available

**Specifications**


<b>Model Name</b>	<b>AMOS-820</b>
<b>Processor</b>	1.0GHz Freescale i.MX 6Quad Cortex-A9 quad-core SoC
<b>System Memory</b>	1GB DDR3 SDRAM onboard
<b>Storage</b>	4GB eMMC Flash memory
<b>Boot Loader</b>	4MB SPI Flash ROM
<b>Graphics</b>	Vivante GC2000 GPU 3 independent, integrated 3D/2D and video graphics processing units Graphics engine supporting OpenGL® ES 2.0, OpenCL and OpenVG™ 1.1 hardware acceleration Supports MPEG-2, VC-1 and H.264 video decoding up to 1080p Supports SD encoding
<b>LAN</b>	Micrel KSZ9031RNX Gigabit Ethernet transceiver with RGMII support
<b>Audio</b>	Freescale SGT15000 low power stereo codec
<b>HDMI</b>	Integrated HDMI 1.4 transmitter
<b>USB</b>	SMSC USB2514 USB 2.0 high speed 4-port hub controllers
<b>CAN</b>	TI SN65HVD1050 EMC optimized CAN transceiver
<b>Expansion I/O</b>	1 miniPCIe slot
<b>Front Panel I/O</b>	1 USB 2.0 port 1 Micro USB 2.0 type B port supports OTG 1 COM (TX/RX) / 2 CAN bus port (supports CAN Protocol specification Version 2.0 B) 1 COM port supports 8-wire DTE mode 1 DIO port supports 8 GPIO (4 GPI + 4 GPO) 3 Audio jacks: Line-in, Line-out and Mic-in 1 Reset button 1 Power & WWAN/Wi-Fi LED 1 2-pole Phoenix DC jack
<b>Back Panel I/O</b>	2 USB 2.0 ports 1 HDMI port 1 Composite RCA jack 1 Gigabit Ethernet port (supports optional IEEE802.3 at type 2) 1 Micro SD/SPI boot switch
<b>Watchdog Timer</b>	Integrated watch dog timer supports two comparison points. Each comparison point can interrupt ARM core, 2nd comparison point capable of generating external interrupts on WDOG line.
<b>Power Supply</b>	12V DC-in (typical: 7W)
<b>Operating System</b>	Android 4.4.2, Linux Kernel 3.10
<b>Operating Temperature</b>	-20°C ~ 65°C (3G & Wi-Fi not included) -20°C ~ 60°C PoE sku (3G & Wi-Fi not included)
<b>Operating Humidity</b>	0% ~ 90% @ 45° C (non-condensing)
<b>Vibration Loading during Operation</b>	With onboard eMMC 7Grms, IEC 60068-2-64, random, 5 ~ 500Hz, 1 Oct./min, 1hr/axis
<b>Shock During Operation</b>	With onboard eMMC 70G, IEC 60068-2-27, half size, 11ms duration



## Front System I/O

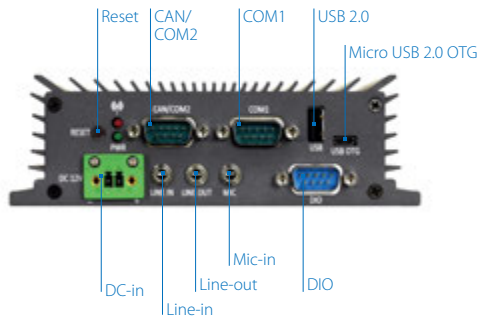

## Rear System I/O

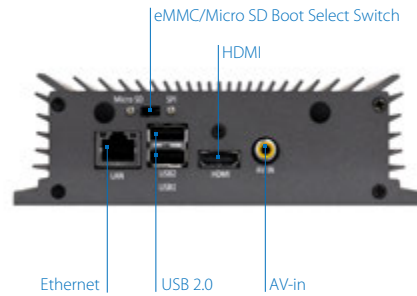

## Specifications

<b>Model Name</b>	<b>AMOS-820</b>
<b>PoE Function</b>	Supports IEEE802.3 at compliant (type2) PD (AMOS-820-P)
<b>Bottom Opening Covers</b>	Open window with removable door plate to access Micro SD and miniPCIe slots
<b>Dimensions</b>	150.5mm(W) x 48.1mm(H) x 103.3mm(D) (5.9" x 1.9" x 4.1")
<b>Weight</b>	0.673kg (1.48lbs)
<b>Compliance</b>	CE, FCC


## Ordering Information

Part Number	System Built-in CPU	Description
AMOS-820-1Q10A1	1.0GHz Freescale i.MX 6Quad Cortex-A9 quad-core SoC	Fanless embedded system with 1GB DDR3 RAM, 4GB eMMC, 512KB SPI Flash ROM, HDMI, 3 USB 2.0, Micro USB 2.0 OTG port, 2 CAN bus, 2 COM, GPIO, Gigabit Ethernet, miniPCIe, RCA-in, 12V DC-in
AMOS-820-2Q10A1	1.0GHz Freescale i.MX 6Quad Cortex-A9 quad-core SoC	Fanless embedded system with 1GB DDR3 RAM, 4GB eMMC, 512KB SPI Serial Flash, HDMI, 3 USB 2.0, Micro USB 2.0 OTG port, 2 CAN bus, 2 COM, GPIO, Gigabit Ethernet, miniPCIe, RCA-in, PoE function, 12V DC-in

## Optional Accessories

Wireless Accessories	
Part Number	Description
00GO27100BU2B0D0	VNT9271BU0DB IEEE 802.11b/g/n USB Wi-Fi dongle
EMIO-2550-00A1	Ublox 3.75G HSPA/UMTS mobile broadband full size miniPCIe module with GPS and SIM card slot

## Dimensions

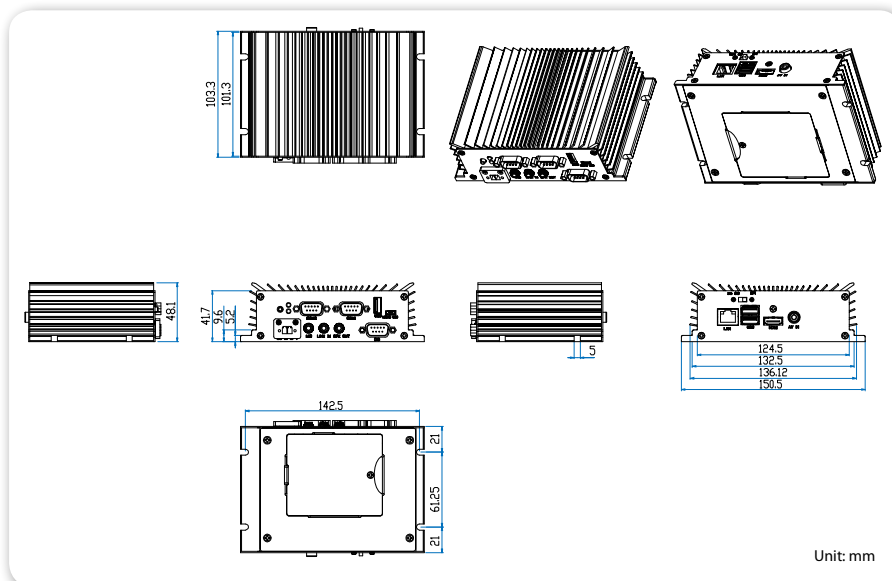

## Packing List

- AMOS-820 system
- 2-pole phoenix plug to DC jack
- Screw pack for mounting
- Washer rubbers pack
- Screw pack for miniPCIe card
- COM/CAN conversion cable



VIA  
**AMOS-800**

Fanless ultra-compact ARM-based system for industrial environments



**Features**


- 800MHz Freescale™ i.MX537 Cortex-A8 SoC
- Wide operating temperature range, -40°C ~ 80°C
- Legacy I/O support
- Supports 8-bit GPIO and CAN bus
- Android, Linux, and WEC7 solution packs available

**Specifications**


<b>Model Name</b>	<b>AMOS-800</b>
<b>Processor</b>	800MHz Freescale i.MX537 Cortex-A8 SoC
<b>System Memory</b>	1GB DDR3 SDRAM onboard
<b>Storage</b>	4GB eMMC Flash memory
<b>Graphics</b>	AMD Z430 GPU 2 integrated, independent 3D/2D graphics processing units Graphics engine supporting OpenGL® ES 2.0 and OpenVG™ 1.1 hardware acceleration Supports MPEG-2, VC-1 and H.264 video decoding up to 1080p
<b>LAN</b>	SMSC LAN8720A 10/100 PHY transceiver with HP Auto-MDIX support
<b>Audio</b>	Freescale SGT5000 low power stereo codec
<b>HDMI</b>	Silicon image SI9024A HDMI transmitter
<b>USB</b>	SMSC USB2514 USB 2.0 high speed 4-port hub controllers
<b>CAN</b>	TI SN65HVD1050 EMC optimized CAN transceiver
<b>Front Panel I/O</b>	1 COM port (TX/RX) 1 COM (TX/RX) / CAN bus port (supports CAN Protocol specification Version 2.0 B) 1 DIO port supports 8-bit GPIO (4 GPI + 4 GPO) 3 Audio jacks: Line-in, Line-out, Mic-in 1 2-pole Phoenix DC jack 1 Power on/off button 1 Power LED
<b>Front Panel I/O</b>	1 Micro SD card slot
<b>Back Panel I/O</b>	3 USB 2.0 ports 1 Mini HDMI port 1 VGA port 1 10/100Mbps Ethernet port 1 Micro SD/eMMC boot switch
<b>Watchdog Timer</b>	Integrated watch dog timer supports two comparison points. Each comparison point can interrupt ARM core, 2nd comparison point capable of generating external interrupts on WDOG line
<b>Power Supply</b>	5V DC-in (typical: 3.1W)
<b>Operating System</b>	Android 2.3, Linux Kernel 2.6.35
<b>Operating Temperature</b>	Extended temperature -40°C ~ 80°C (VGA display)
<b>Operating Humidity</b>	0% ~ 90% @ 45° C (non-condensing)
<b>Vibration Loading during Operation</b>	With onboard eMMC 5Grms, IEC 60068-2-64, random, 5 ~ 500Hz, 1 Oct./min, 1hr/axis
<b>Shock During Operation</b>	With onboard eMMC 50G, IEC 60068-2-27, half size, 11ms duration
<b>Bottom Opening Covers</b>	Open window with removable plate to access Micro SD slot
<b>Dimensions</b>	150mm(W) x 45mm(H) x 108mm(D) (5.9" x 1.8" x 4.25")
<b>Weight</b>	0.778kg (1.71lbs)
<b>Compliance</b>	CE, FCC



## Front Panel External I/O

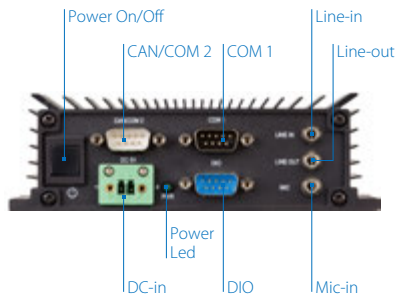

## Rear Panel External I/O

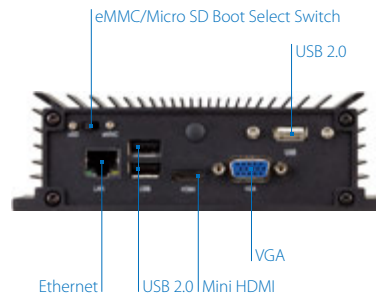

## Ordering Information


Part Number	System Built-in CPU	Description
AMOS-800-1S08A1	800MHz Freescale i.MX537 Cortex-A8 single-core SoC	Fanless embedded system with 1GB DDR3 SDRAM, 4GB eMMC, Mini HDMI, VGA, 3 USB 2.0, 10/100Mbps Ethernet, Micro SD card slot, 1 COM, 1 COM/CAN bus, 1 DIO, 5V DC-in

## Optional Accessories

### Wireless Accessories

Part Number	Description
00GO27100BU2B0D0	VNT9271BU0DB IEEE 802.11b/g/n USB Wi-Fi dongle

## Dimensions

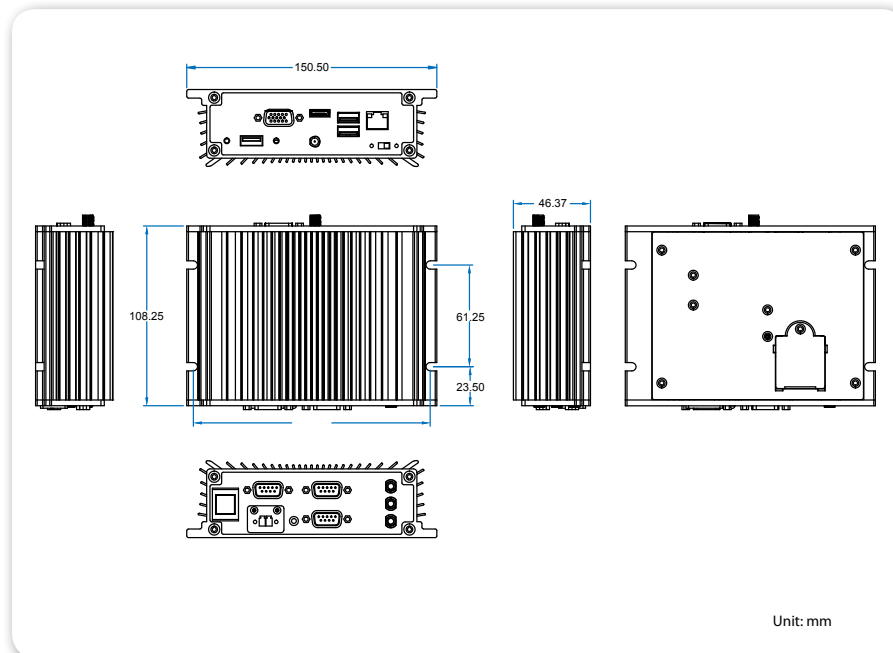

## Packing List

- AMOS-800 system
- 5V AC-to-DC adapter, 2-pole phoenix plug to DC jack
- Console cable
- Washer rubbers
- Screw pack

# VIA ALTA DS 2

Fanless ultra-compact dual-screen Android digital signage system



### Features


- High-performance 1.0GHz VIA Elite E1000 Cortex-A9 dual-core SoC
- Designed for Android operating system
- Dual-screen support with optional second HDMI port
- Extended & independent screen content support
- Android software solution pack and signage starter kit available

### Specifications


<b>Model Name</b>	<b>ALTA DS 2</b>
<b>Processor</b>	1.0GHz VIA Elite E1000 Cortex-A9 dual-core SoC
<b>System Memory</b>	2GB DDR3 SDRAM onboard
<b>Storage</b>	4GB eMMC Flash memory Up to 16GB eMMC (optional) Supports 1 2.5" SATA HDD/SSD (Project-based only)
<b>Boot Loader</b>	4MB SPI Flash ROM
<b>Graphics</b>	3 integrated, independent 3D/2D and video processing units Graphics engine supporting OpenGL® ES 3.0 hardware acceleration Supports MPEG-2, VC-1 and H.264 video decoding up to 1080p
<b>LAN</b>	Realtek RTL8111G-CG
<b>Audio</b>	Wolfson WM8960 Audio Codec
<b>HDMI</b>	Integrated HDMI 1.4 transmitter 2nd from ADV7511
<b>Front Panel I/O</b>	2 USB 2.0 ports 1 SD card slot 2 Audio jacks: Line-out and Mic-in (shared with CIR, optional) 1 Power on/off button & power indicator LED
<b>Back Panel I/O</b>	2 Mini USB 2.0 ports (optional) - 1 for Wi-Fi - 1 for UART1 TX/RX 2 HDMI-out ports (1 optional) 1 Gigabit Ethernet port 1 DC-in jack
<b>Power Supply</b>	12V DC-in (typical: 5.12W)
<b>Operating System</b>	Android 4.3
<b>Operating Temperature</b>	0°C ~ 40°C
<b>Operating Humidity</b>	0 ~ 90% @ 40°C (non-condensing)
<b>Storage Temperature</b>	-20°C ~ 70°C
<b>Dimensions</b>	175mm(H) x 25mm (H) x 118(D) (6.88" x 0.98" x 4.64")
<b>Weight</b>	0.555kg (1.22lbs)
<b>Compliance</b>	CE, FCC



## Front Panel External I/O

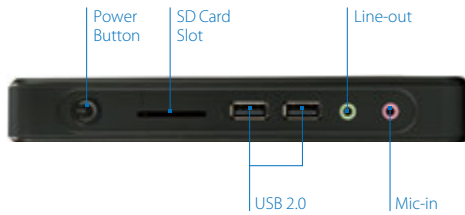

## Rear Panel External I/O

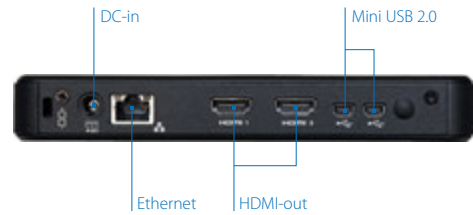

## Ordering Information

Part Number	System Built-in CPU	Description
VT60800014003-T	1.0GHz VIA Elite E1000	Android signage system with 2GB DDR3 RAM, 4GB eMMC, 2 HDMI-out, 2 USB 2.0 ports, 2 Mini USB 2.0 ports, SD card slot, Gigabit Ethernet, Stand holder, US power cord, 12V DC-in

## Optional Accessories


### Wireless Accessories

Part Number	Description
00GO27100BU2B0D0	VNT9271BU0DB IEEE 802.11b/g/n USB Wi-Fi dongle

### Mounting Options

Part Number	Description
VT6076-C0000A1	VESA mount cradle

## Dimensions

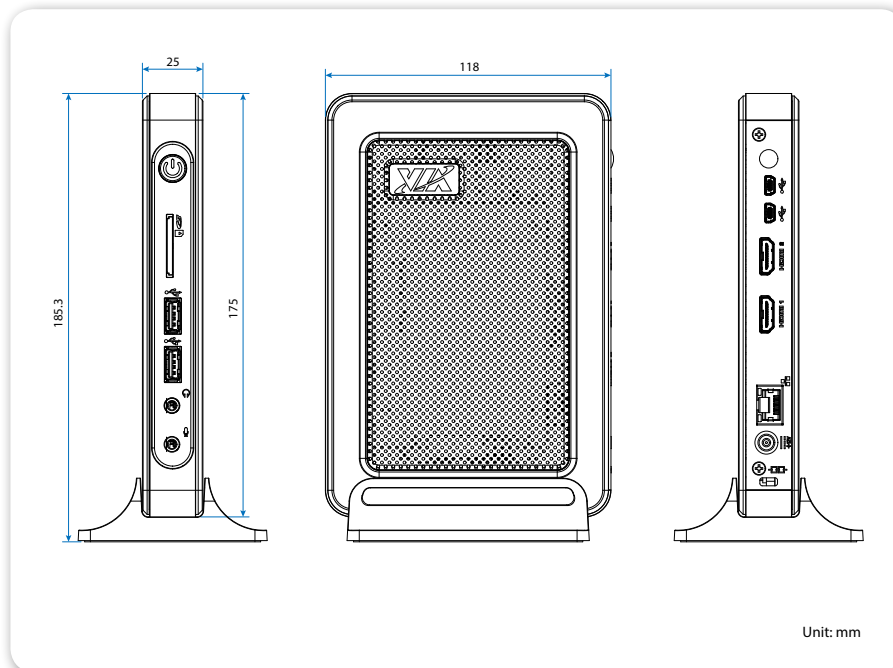

## Packing List

- ALTA DS 2 system
- Stand holder
- AC-to-DC adapter
- Power cord (USA type)

### VIA ALTA DS

Fanless ultra-compact  
Android digital signage  
system

#### Features

- All-in-one system with ready to load software
- Designed for Android operating system
- Hardware acceleration of the most demanding video formats for resolutions up to 1080p
- HDMI and VGA (optional) ports
- Android software solution pack and signage starter kit available




#### Specifications

<b>Model Name</b>	<b>ALTA DS</b>
<b>Processor</b>	800MHz VIA Cortex-A9 SoC
<b>System Memory</b>	1GB DDR3 SDRAM onboard
<b>Storage</b>	4GB eMMC Flash memory Up to 16GB eMMC (optional)
<b>Boot Loader</b>	512KB SPI Flash ROM onboard
<b>Graphics</b>	Mali-400 SP GPU 2 integrated, independent 3D/2D graphics processing units Graphics engine supporting OpenGL® ES 2.0 hardware acceleration Supports MPEG-2, VC-1 and H.264 video decoding up to 1080p
<b>LAN</b>	VIA VT6113 10/100 Base-TX PHY chip
<b>Audio</b>	VT1603A I2S audio Internal speaker (optional)
<b>HDMI</b>	Integrated HDMI 1.4 transmitter
<b>Front Panel I/O</b>	2 USB 2.0 ports 1 SD card slot 2 Audio jacks: Line-out and Mic-in 1 Power on/off switch
<b>Back Panel I/O</b>	2 USB 2.0 ports (optional) - 1 port for Wi-Fi - 1 port for UART1 TX/RX 1 HDMI port 1 VGA port (optional) 1 10/100Mbps Ethernet port 1 DC-in jack
<b>Power Supply</b>	12V DC-in (typical: 3.35W)
<b>Operating System</b>	Android 4.0.3, Linux kernel 3.0.8
<b>Operating Temperature</b>	0°C ~ 40°C
<b>Operating Humidity</b>	0 ~ 80% @ 40°C (non-condensing)
<b>Storage Temperature</b>	-20°C ~ 70°C
<b>Dimensions</b>	175mm(H) x 25mm (H) x 118(D) (6.88" x 0.98" x 4.64")
<b>Weight</b>	0.46kg (1.01lbs)
<b>Compliance</b>	CE/FCC






## Front Panel External I/O

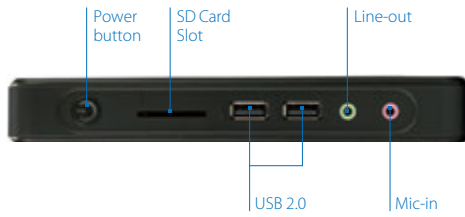

## Rear Panel External I/O

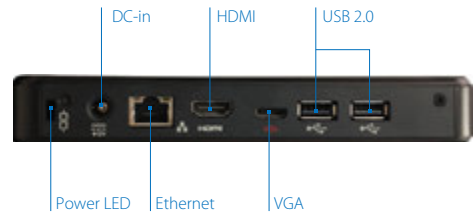

## Ordering Information

Part Number	System Built-in CPU	Description
VT60780013001-T	800MHz VIA Cortex-A9 SoC	Android signage system with 1GB DDR3 RAM, 4GB eMMC, HDMI, 4 USB 2.0, SD card slot, 10/100Mbps Ethernet, Stand holder, US power cord, 12V DC-in

## Optional Accessories


### Wireless Accessories

Part Number	Description
00GO27100BU2B0D0	VNT9271BU0DB IEEE 802.11b/g/n USB Wi-Fi dongle

### Mounting Options

Part Number	Description
VT6076-C0000A1	VESA mount cradle

## Dimensions

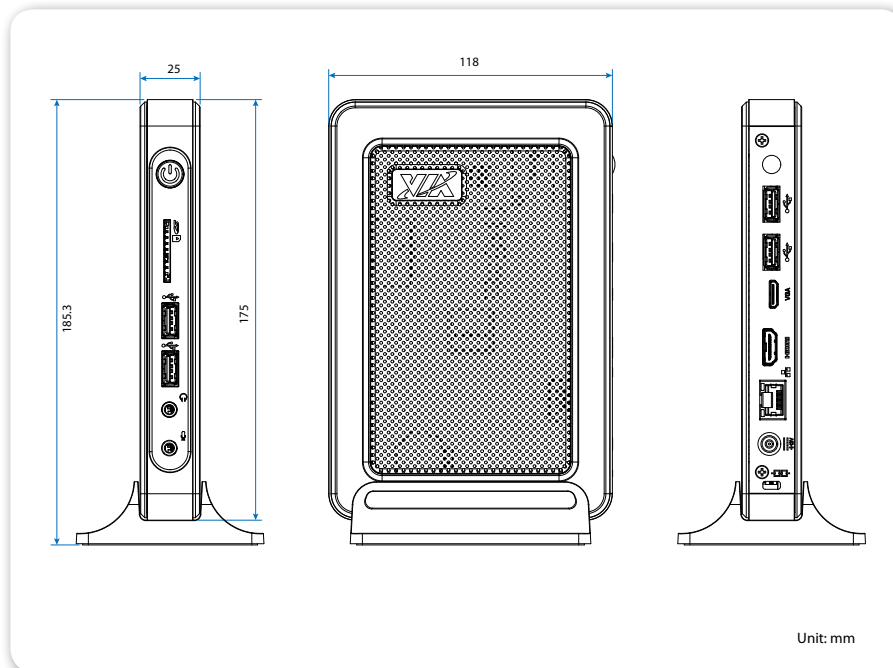

## Packing List

- ALTA DS system
- Stand holder
- AC-to-DC adapter
- Power cord (USA type)

VIA Embedded  
ARM Boards  
ARM Systems  
VIA Embedded  
ARM Systems  
x86 Boards  
x86 Systems  
VIA Embedded  
x86 Systems  
Accessories

## Android Signage Solutions

VIA

### ARTiGO A900

Fanless ultra-compact Android system for interactive kiosk, digital signage, home automation, HMI, and other IoT applications



#### Features


- High-performance 1.0GHz VIA Elite E1000 Cortex-A9 dual-core SoC
- Advanced 3D/2D graphics and video engine with Open GL ES 3.0 hardware acceleration support
- Mini HDMI-out port
- Rich I/O connectivity, including COM, Digital I/O, and USB 2.0 ports
- Android 4.3 BSP with VIA SMART ETk

#### Specifications


<b>Model Name</b>	<b>ARTiGO A900</b>
<b>Processor</b>	1.0GHz VIA Elite E1000 Cortex-A9 dual-core SoC
<b>System Memory</b>	2GB DDR3 SDRAM onboard
<b>Storage</b>	4GB eMMC Flash memory 1 mSATA slot
<b>Graphics</b>	3 integrated, independent 3D/2D and video processing units Graphics engine supporting OpenGL® ES 3.0 hardware acceleration Supports MPEG-2, VC-1 and H.264 video decoding up to 1080p
<b>LAN</b>	Realtek RTL8111G PCIe Gigabit Ethernet controller (WOL support)
<b>Audio</b>	Wolfson WM8960 Audio Codec
<b>HDMI</b>	Integrated HDMI 1.4 transmitter
<b>Expansion I/O</b>	1 miniPCIe slot
<b>Front Panel I/O</b>	3 USB 2.0 ports 2 Audio jacks: Line-out and Mic-in 1 Power on/off button with built-in LED 1 Red LED for mSATA status
<b>Back Panel I/O</b>	1 Mini USB 2.0 port 1 Mini HDMI port 7 pin DIO connector supports 4-bit GPIO (2 GPI +2 GPO) 8 pin COM connector (RS232/485) 1 Gigabit Ethernet port 1 Micro SD card slot 2 Antenna holes for 3G or Wi-Fi (manufacturing option) 1 DC-in jack
<b>Bottom Panel I/O</b>	1 miniPCIe slot 1 mSATA slot
<b>Power Supply</b>	12V DC-in (typical: 5W)
<b>Operating System</b>	Android 4.3
<b>Operating Temperature</b>	-5°C ~ 50°C
<b>Operating Humidity</b>	0% ~ 90% @ 45° C (non-condensing)
<b>Vibration Loading during Operation</b>	With onboard eMMC and mSATA 5Grms, IEC60068-2-64, random, 5~500Hz, 1 Oct./min, 1hr/axis
<b>Shock during Operation</b>	With onboard eMMC and mSATA 50G, IEC60068-2-27, half size, 11ms duration
<b>Dimensions</b>	125mm(W) x 30mm(H) x 125mm(D) (4.92" x 1.18" x 4.92")
<b>Weight</b>	0.525kg (1.15lbs)
<b>Mounting</b>	VESA mount (100mm x 100mm) (optional)
<b>Mechanical Construction</b>	Aluminum top cover Metal chassis housing
<b>Compliance</b>	CE/FCC/CCC



## Front Panel External I/O

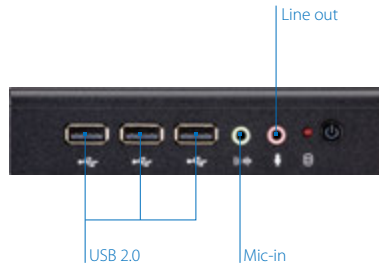

## Rear Panel External I/O

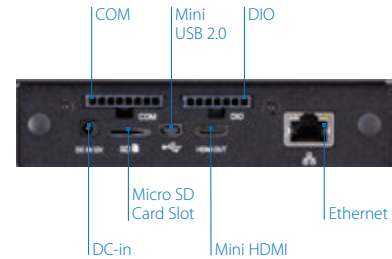

## Ordering Information


Part Number	System Built-in CPU	Description
ATG-A900-1D10A1	1.0GHz VIA Elite E1000	Android System with 2GB DDR3 RAM, 4GB eMMC, 3 USB 2.0, Mini USB 2.0, COM, GPIO, Gigabit Ethernet, 1 Mini HDMI, Micro SD card slot, 1 miniPCle slot, 1 mSATA connector, 12V DC-in

## Optional Accessories

### Wireless Accessories

Part Number	Description
00GO27100BU2B0D0	VNT9271BU0DB IEEE 802.11b/g/n USB Wi-Fi dongle
EMIO-2550-00A1	Ublox 3.75G HSPA/UMTS mobile broadband full size miniPCle module with GPS and SIM card slot (*Note: GPS function is not currently supported for ARTIGO A900)

## Dimensions

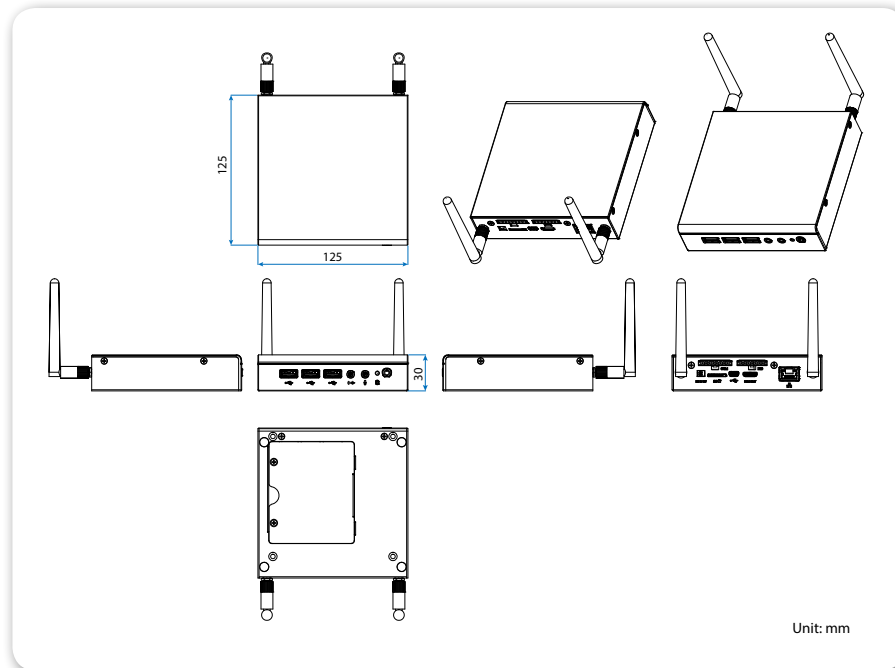

Unit: mm

## Packing List

- ARTIGO A900 system
- AC-to-DC adapter
- Power cord (USA type)
- COM cable
- DIO cable
- Jumper cap
- Rubber feet

# SMART Hospitality

Enjoy Your Stay with eButler Cloud Computing  
Now implemented by Taiwan Alishan House  
and several Five-Star Hotels around the world



## VIA Embedded x86 Solutions

VIA Embedded provides all the building blocks that designers need to build reliable, low-power, high-performance x86 systems for a diverse range of embedded applications, including digital signage, transportation, and industrial automation.

Combining a wide selection of low-power, feature-rich small form factor boards and rugged and reliable fanless small form factor systems with an extensive suite of software and hardware customization capabilities and longevity support, VIA Embedded enables developers to create innovative new solutions based on the x86 architecture.





## VIA Embedded x86 Boards

VIA Embedded offers a wide variety of highly-integrated, low-power x86 boards featuring the new VIA Eden® X4 and VIA QuadCore E-Series processors. Available in a choice of Mini-ITX and Pico-ITX form factors, VIA Embedded x86 boards combine powerful multicore processing with rich multimedia, connectivity, and I/O features to provide all the necessary functionality and performance for even the most demanding embedded system design applications.

Built to the most exacting quality standards, VIA Embedded x86 boards are ultra-reliable and feature guaranteed longevity of up to seven years. To ensure that they can operate in even the most challenging environments, the boards also support extended temperature ranges.

With their rich feature sets, low power consumption, and cutting-edge functionality and performance, VIA Embedded x86 boards are ideal for a myriad of embedded design applications, including digital signage, industrial automation, healthcare, HMI, thin clients, and transportation. Customers can also take advantage of the extensive hardware and software customization services provided by VIA Embedded to create truly differentiated products for their target markets.



## VIA Embedded Computer-on-Module Solutions

The modular design philosophy of VIA Embedded x86 Com Express® and ETX® form factors provides customers with the freedom to easily customize and modify existing designs in order to create innovative new devices using significantly faster design cycles and fewer resources.

### VIA COM Express® Modules

VIA COM Express® modules provide scalable solutions for high-level embedded applications and support system expansion and application-specific customization. Designed to combine low power consumption with advanced multimedia performance, VIA COM Express® modules are targeted at industrial PCs and large OEM customers focused on dynamic application segments, including gaming, healthcare, military, transportation, and industrial automation. They are available in a choice of Basic, Mini, and Compact standards.

Customers can utilize a proprietary multi-I/O carrier board for evaluation purposes or take advantage of the rich design experience and expertise of VIA Embedded to develop a customized carrier board.



### VIA ETX Module

VIA ETX is a highly-integrated embedded multimedia module with native ISA/PCI support for legacy expansion cards and applications. Powered by a VIA multicore processor, the VIA ETX module offers industry-leading performance, high display resolutions of up to 2560 x 1600 on VGA interface, and 12/24-bit dual-channel LVDS panel support.



## VIA Embedded x86 Systems

VIA Embedded offers an unmatched selection of robust, small form factor x86 systems targeted at a wide range of embedded applications and environments, including industrial automation, digital signage, retail, hospitality, in-vehicle, transportation, home, and entertainment.

VIA Embedded x86 systems combine ultra-low power consumption and fanless design implementations with advanced computing, graphics, and video performance. They also cover a broad spectrum of feature sets, including rich I/O connectivity, and offer flexible expansion options in order to meet the diverse needs of the embedded market.

VIA Embedded x86 systems are designed and manufactured to the highest standards of quality and reliability, and include a range of ruggedized, dust-proof chassis. They also support extended temperature ranges in order to operate in even the most demanding environments and are backed up with guaranteed longevity in order to support embedded product life cycles.

To ensure a rapid development path for embedded developers, VIA Embedded x86 systems can be integrated with a growing number of software support packages for Windows, Windows Embedded, and Linux. A comprehensive range of customization and technical support services to assist customers in taking their products to market is also available.

## VIA AMOS-3000 Series Industrial Fanless Systems

Integrating a choice of low power processors, including the latest VIA Eden X4 processor, into compact, fanless, and dust-proof chassis designs, the VIA AMOS 3000 Series fanless systems provide ultra-powerful and ultra-reliable solutions for a wide variety of embedded segments including medical, healthcare, industrial and building automation, digital signage, kiosk, POI/POS, gaming and surveillance applications.

With their unique modular design and rich I/O features, VIA AMOS 3000 fanless systems offer multiple opportunities for customization as well as being quick and easy to assemble. They are also extremely low power and support a wide temperature range, making them an ideal solution for even the most demanding operating environments.





## VIA ARTiGO Series Systems

Leveraging the compact design of the VIA Pico-ITX boards, VIA ARTiGO Series small form factor systems provide a growing selection of slim, low profile solutions for a wide range of high-performance embedded applications, including thin clients and fanless multi-display digital signage systems.

Combining advanced multimedia capabilities such as 1080p HD video support with VIA high performance Eden X4 processors, VIA ARTiGO Series systems pack a rich set of connectivity and I/O features into a range of attractive ultra-compact chassis that are small enough to fit into almost any environment. In addition to being compatible with a wide range of Windows, Windows Embedded, and Linux operating systems, they are also ultra-reliable and deliver high levels of energy efficiency. For digital signage applications VIA ARTiGO Series systems also support VIA MagicView™, a powerful and flexible content management platform for designing, distributing and displaying digital signage content.



## VIA VIPRO Series Panel PC

The VIA VIPRO VP7910 is an embedded panel computer, featuring the latest VIA Eden X4 processor, with a 10.4" TFT LCD resistive touch or p-cap screen that provides the ideal solution for applications that require low power consumption and fanless, noise-free operation with multiple I/O ports.

With its durable fanless design and advanced computing, multimedia, and connectivity features, the VIA VIPRO VP7910 Fanless Panel PC is suitable for a wide variety of embedded, multimedia, and industrial HMI applications including factory automation systems, precision machinery, production process control, terminal information systems, entertainment management systems, and car park automation systems.

### VIA EMIO Wireless Modules

VIA EMIO Wireless modules are designed for easy integration with selected VIA Embedded x86 systems and are compatible with global IEEE 802.11b/g/n/e standards.







# VIA Embedded x86 Software Development Packages and Customization Services

VIA Embedded offers a wide range of software packages and services to enable developers to customize x86 systems and devices using Linux and Windows, including display, networking, and audio driver support and the VIA SMART ETK.



## VIA SMART ETK

The VIA SMART ETK provides an application programming interface (API) that simplifies system development on VIA Embedded x86 platforms. The VIA SMART ETK is also bundled with SMART ETK Demo, which is easy to install and has a user-friendly GUI for demonstrating the various functions of VIA Embedded x86 platforms. Both the VIA SMART ETK and SMART ETK Demo are easy-to-use tools that help to shorten development time and speed up time to market.

## VIA Embedded Vehicle Power Control

VIA Embedded Vehicle Power Control delivers transportation customers an easy-to-use solution that helps prevent damage from power spikes and ensures better battery management. In addition to providing a protocol for power on/off delay, maintenance power on/off time, IGN off notification and other functions, it is also bundled with demo utility.

## VIA StrongBox SDK

VIA Embedded provides an easy-to-use virtual disk encryption solution called StrongBox SDK which utilizes the VIA ACE hardware security engine integrated in VIA x86 processors. StrongBox helps avoid data leaks with minimal impact on performance, and provides an application programming interface (API) that makes it easy for system developers using VIA Embedded x86 platforms to carry out further development. The VIA StrongBox SDK implements many basic functions, such as creating/deleting image files, mounting/dismounting devices, and locking/unlocking devices. VIA StrongBox is a virtual disk encryption application based on the VIA StrongBox SDK and can be downloaded for free from the VIA website.

## VIA ACE-CNX for NAS Disk Encryption

VIA ACE-CNX provides top level data protection for NAS disk encryption utilizing the AES-256 standard. It also leverages the advanced capabilities of the VIA ACE hardware security engine integrated in VIA x86 processors to minimize the impact on overall system performance.



# VIA Embedded x86 Boards

## Pico-ITX

- EPIA-E900 (Pico-ITXe)
- EPIA-P910
- EPIA-P900

## Mini-ITX

- EPIA-M920
- EPIA-M910
- EPIA-M900
- EPIA-M860
- VB7009

## Computer-on-Module

- COMe-9X90
- COMe-8X92
- COMe-8X91
- COMe-8X90
- ETX-8X90

# Quick Guide

Model	EPIA-E900 (Pico-ITXe) <b>NEW</b>	EPIA-P910 <b>NEW</b>	EPIA-P900
Processor	1.2GHz VIA Eden® X4	1.2GHz VIA Eden® X4	1.0GHz VIA Eden® X2
Chipset	VX11H MSP	VIA VX11H MSP	VIA VX900H MSP
Graphics	Integrated VIA Chrome® 640 DX11 3D/2D graphics with MPEG-2, WMV9, VC1 and H.264 video decoding acceleration	Integrated VIA Chrome® 640 DX11 3D/2D graphics with MPEG-2, WMV9, VC1 and H.264 video decoding acceleration	Integrated VIA Chrome®9 HD DX9 3D/2D graphics with MPEG-2, WMV9, VC1 and H.264 video decoding acceleration
System Memory	1 DDR3 1333 SDRAM (SODIMM) (Max. 8GB)	1 DDR3 1333 SDRAM (SODIMM) (Max. 8GB)	1 DDR3 800/1066 SDRAM (SODIMM) (Max. 4GB)
Storage	1 SATA connector	2 SATA connectors	2 SATA connectors
Audio	HD	HD	HD
Display I/O	1 Mini HDMI	1 Mini HDMI 1 VGA 1 Single-CH LVDS	1 HDMI 1 VGA 1 Single-CH LVDS
USB	2 USB 3.0 2 USB 2.0	2 USB 3.0 6 USB 2.0	8 USB 2.0
LAN	2 Gigabit Ethernet	1 Gigabit Ethernet	1 Gigabit Ethernet
COM	2 COM	N/A	N/A
Digital I/O	N/A	1	1
Expansion I/O	MXM connector for 1 PCIe x4, 4 USB 2.0, 1 Single-CH LVDS	Proprietary connector for 3 PCIe x1, 3 USB	Proprietary connector for 2 PCIe x1, 1 USB
Power Supply	12V DC-in	12V DC-in	12V DC-in
Operating System	Windows 8.1/8/7, WES7, Linux	Windows 8.1/8/7, WES 7, Linux	Windows 7, WES 7, Windows CE, Linux
Operating Temperature	0°C ~ 55°C	0°C ~ 55°C	0°C ~ 60°C
Optional Accessories	EMIO-1533 USB Wi-Fi	P910-A (3 audio jacks/2 USB 2.0) EMIO-1533 USB Wi-Fi LPC-01/02/04	EMIO-1533 USB Wi-Fi LPC-01/02/04

## Pico-ITXe Series

NEW


# VIA EPIA-E900

Highly-integrated low-power platform with rich multimedia and I/O capabilities

## Features

- Compact 13.8cm x 7.2cm Pico-ITXe form factor
- Fanless 1.2GHz VIA Eden® X4 Processor
- DX11 graphics with MPEG-2/WMV9/VC1/H.264 decoding acceleration
- Multiple expansion options
- Supports one Mini HDMI

## Board Placement

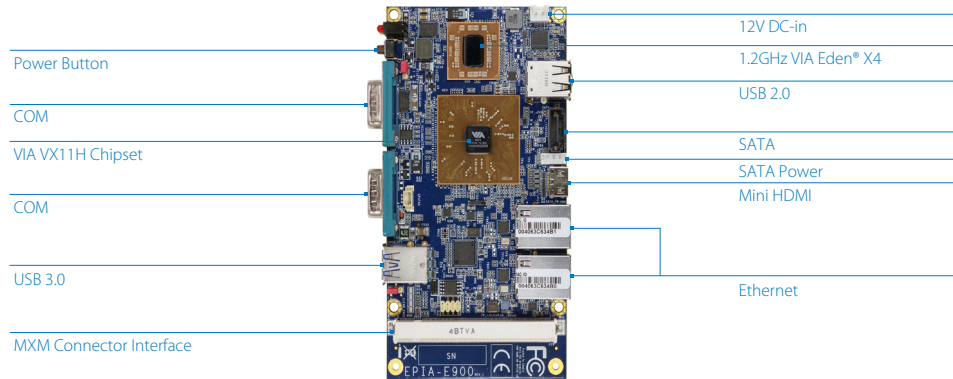


## Specifications


<b>Model Name</b>	<b>EPIA-E900-12QE</b>
<b>Processor</b>	1.2GHz VIA Eden® X4 (Fanless)
<b>Chipset</b>	VIA VX11H Media System Processor
<b>BIOS</b>	AMI Aptio UEFI BIOS, 32Mbit Flash memory
<b>System Memory</b>	1 DDR3 1333 SODIMM socket Up to 8GB memory size
<b>Storage</b>	1 SATA connector
<b>Graphics</b>	Integrated Chrome® 640 DX11 3D/2D graphics with MPEG-2, WMV9, VC1 and H.264 video decoding acceleration
<b>LAN</b>	2 Realtek RTL8111G PCIe Gigabit Ethernet controllers
<b>Audio</b>	Through MXM support
<b>Super I/O</b>	Fintek F81801U-1
<b>Expansion I/O</b>	MXM connector interface
<b>MXM Connector Interface</b>	1 SATA port 4 USB 2.0 ports 1 Display Port or HDMI port 1 Single channel 18/24-bit LVDS panel connector 1 COM port (from VX11) 1 DVP port 1 LPC 1 SMBus 1 SPI 1 Digital I/O (3GPI + 3GPO) 1 HD Audio (codec required) 1 System fan 1 PCIe x4
<b>Onboard I/O</b>	1 SATA connector 1 SATA power connector 1 USB pin header (supports VNT9271 Wi-Fi module) 1 Smart Fan pin header for CPU 1 DC-in connector
<b>Front Panel I/O</b>	2 USB 3.0 ports 2 COM ports 1 HDD LED 1 Power LED 1 Power button
<b>Back Panel I/O</b>	2 USB 2.0 ports 1 Mini HDMI port 2 Gigabit Ethernet ports
<b>Power Supply</b>	12V DC-in
<b>Operating System</b>	Windows 8.1/8/7, WES 7, Linux
<b>System Monitoring &amp; Management</b>	Wake-on-LAN, Keyboard Power-on, Timer Power-on, System power management, AC power failure recovery, Watch Dog Timer
<b>Operating Temperature</b>	0°C ~ 55°C
<b>Operating Humidity</b>	0% ~ 95% (non-condensing)



## Back Panel I/O

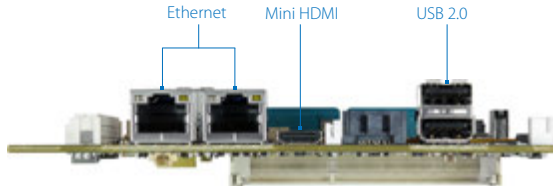

## Front Panel I/O

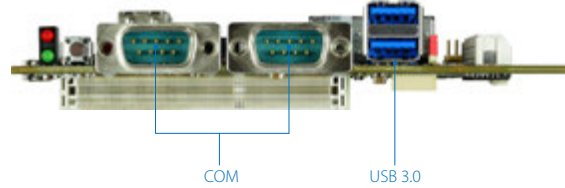

## Accessories



**EMIO-1533 USB Wi-Fi Module**  
802.11b/g/n standards

## Specifications

<b>Model Name</b>	<b>EPIA-E900-12QE</b>
<b>Form Factor</b>	Pico-ITXe (13.8cm x 7.2cm, 5.4" x 2.8")
<b>Compliance</b>	CE/FCC

## Ordering Information


Model Name	CPU Frequency	Description
EPIA-E900-12QE	VIA Eden® X4 @ 1.2GHz	Pico-ITXe Board with 1.2GHz VIA Eden® X4 CPU, Mini HDMI, 2 USB 3.0, 2 USB 2.0, 2 COM, 2 Gigabit Ethernet, 1 SATA, 12V DC-in

## Optional Accessories

### Wireless Modules

Part Number	Description
EMIO-1533-00A2	VNT9271 IEEE 802.11 b/g/n USB Wi-Fi module with assembly kit

## Block Diagram

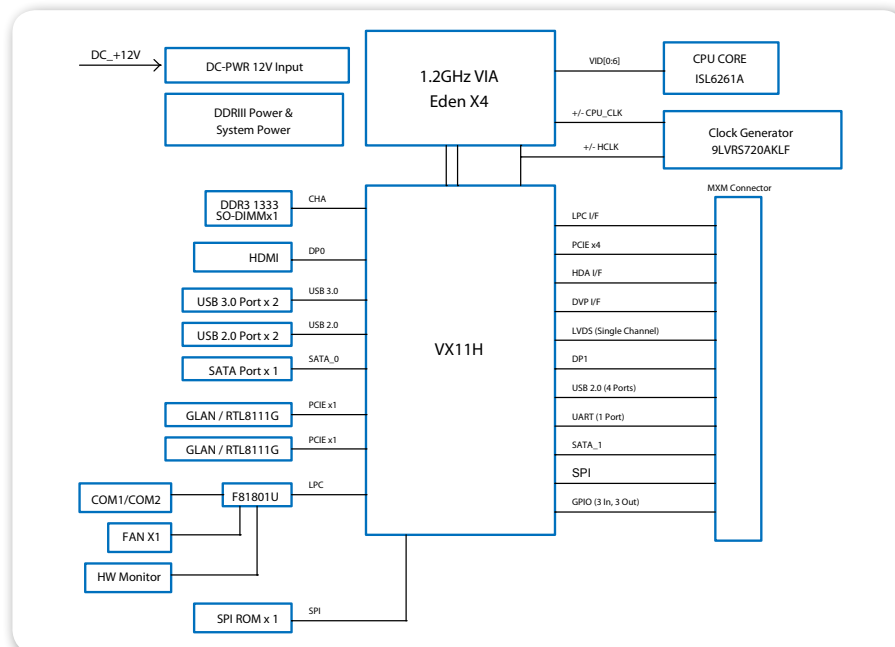

## Packing List

### Items

- DC power cable
- SATA cable
- SATA power cable

## Pico-ITX Series

NEW

VIA

# EPIA-P910


Highly-integrated low-power platform with rich multimedia and I/O capabilities

## Features

- Compact 10cm x 7.2cm Pico-ITX form factor
- Fanless 1.2GHz VIA Eden® X4 Processor
- DX11 graphics with MPEG-2/WMV9/VC1/H.264 decoding acceleration
- Multiple expansion options through MXM connector
- Supports one Mini HDMI and one VGA port




## Board Placement

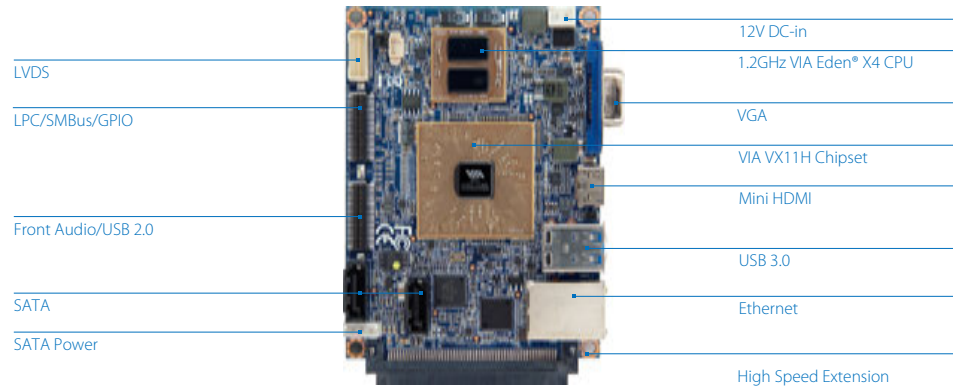


## Specifications

<b>Model Name</b>	<b>EPIA-P910-12QE</b>
<b>Processor</b>	1.2GHz VIA Eden® X4 (Fanless)
<b>Chipset</b>	VIA VX11H Media System Processor
<b>BIOS</b>	AMI Aptio UEFI BIOS, 32Mbit Flash memory
<b>System Memory</b>	1 DDR3 1333 SODIMM socket Up to 8GB memory size
<b>Storage</b>	2 SATA connectors
<b>Graphics</b>	Integrated Chrome® 640 DX11 3D/2D graphics with MPEG-2, WMV9, VC1 and H.264 video decoding acceleration
<b>LAN</b>	1 VIA VT6130 PCIe Gigabit Ethernet controller
<b>Audio</b>	VIA VT2021 High Definition Audio Codec
<b>Super I/O</b>	Fintek F81801U-I
<b>Expansion I/O</b>	3 PCIe x1 + 3 USB 2.0 (through high speed extension)
<b>Onboard I/O</b>	2 SATA connectors 1 SATA power connector 1 USB 2.0 pin header for 3 ports 1 Single-channel 18/24-bit LVDS panel connector 1 LPC pin header 1 SMBus pin header 1 Digital I/O pin header (4 GPI + 4 GPO) 1 Audio pin header for Line-in, Line-out, Mic-in 1 Smart Fan pin header for CPU 1 Backlight control for panel 1 DC-in connector 3 PCIe x1 + 3 USB 2.0 ports (through high speed extension)
<b>Back Panel I/O</b>	2 USB 3.0 ports 1 Mini HDMI port 1 VGA port 1 Gigabit Ethernet port
<b>Power Supply</b>	12V DC-in
<b>Operating System</b>	Windows 8.1/8/7, WES 7, Linux
<b>System Monitoring &amp; Management</b>	Wake-on-LAN, Keyboard Power-on, Timer Power-on, System power management, AC power failure recovery, Watch Dog Timer
<b>Operating Temperature</b>	0°C ~ 55°C
<b>Operating Humidity</b>	0% ~ 95% (non-condensing)
<b>Form Factor</b>	Pico-ITX (10cm x 7.2cm, 3.9" x 2.8")
<b>Compliance</b>	CE/FCC

## Back Panel I/O

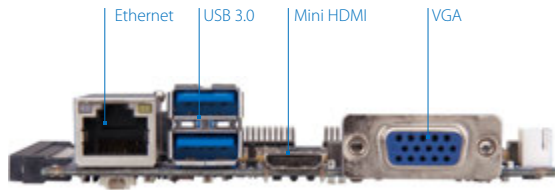

## Accessories

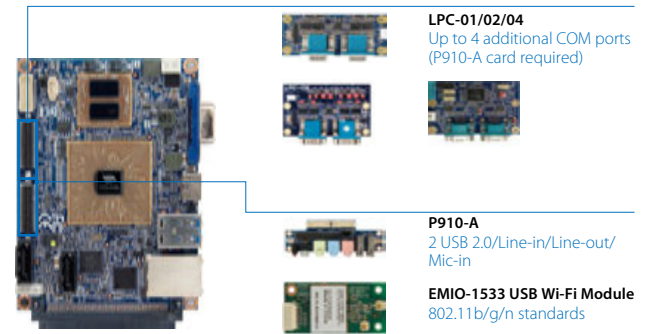

**LPC-01/02/04**  
Up to 4 additional COM ports  
(P910-A card required)

**P910-A**  
2 USB 2.0/Line-in/Line-out/  
Mic-in

**EMIO-1533 USB Wi-Fi Module**  
802.11b/g/n standards

## Ordering Information

Model Name	CPU Frequency	Description
EPIA-P910-12QE	VIA Eden® X4 @ 1.2GHz	Pico-ITX Board with 1.2GHz VIA Eden® X4 CPU, Mini HDMI, VGA, LVDS, 2 USB 3.0, 6 USB 2.0, Gigabit Ethernet, 2 SATA, 12V DC-in

## Optional Accessories


### I/O Expansion Cards

Part Number	Description
EPIA-P910-A	Front I/O card with 2 LEDs, 1 power button, 3 audio jacks and 2 USB 2.0
LPC-01	Expansion module for four COM ports
LPC-02	Expansion module for four COM ports (5V or 12V)
LPC-04	Expansion module for two or four COM ports (5V or 12V)

### Wireless Modules

Part Number	Description
EMIO-1533-00A2	VNT9271 IEEE 802.11 b/g/n USB Wi-Fi module with assembly kit

## Block Diagram

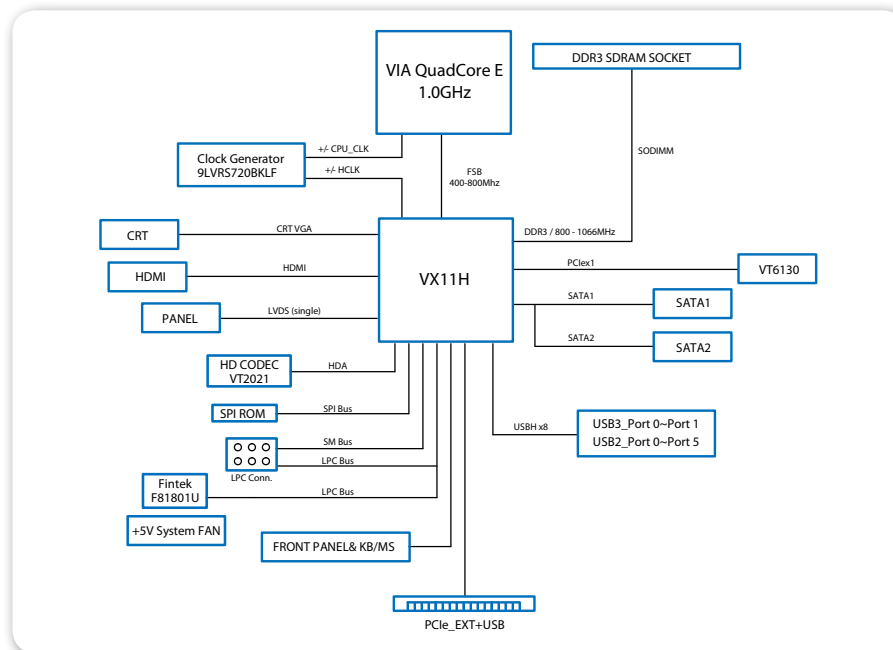

## Packing List

### Items

- DC power cable
- SATA cable
- SATA power cable



## Pico-ITX Series

# VIA EPIA-P900

Ultra-compact low-power platform with advanced multimedia capabilities

## Features

- Compact 10cm x 7.2cm Pico-ITX form factor
- 1.0GHz VIA Eden® X2 Processor
- DX9 graphics with MPEG-2/WMV9/VC1/H.264 decoding acceleration
- Multiple expansion options
- Supports one HDMI and one VGA port

## Board Placement


12V DC-in

VGA/USB

HDMI

Gigabit Ethernet

High Speed Extension  
(2 PCIe x1 + 1 USB 2.0)

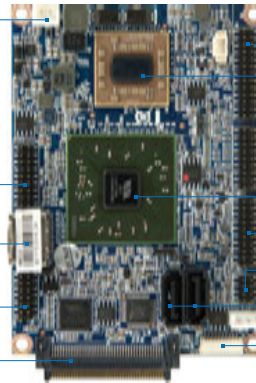

LPC/SMBus/GPIO

VIA Eden® X2 CPU

VIA VX900H Chipset

USB 2.0 Pin Header for 5 Ports

Front Audio

SATA

UART


## Specifications

<b>Model Name</b>	<b>EPIA-P900-10</b>
<b>Processor</b>	1.0GHz VIA Eden® X2
<b>Chipset</b>	VIA VX900H Media System Processor
<b>BIOS</b>	AMI BIOS, 8Mbit Flash memory
<b>System Memory</b>	1 DDR3 800/1066 SODIMM socket Up to 4GB memory size
<b>Storage</b>	2 SATA connectors
<b>Graphics</b>	Integrated VIA Chrome®9 HD DX9 3D/2D graphics with MPEG-2, WMV9, VC1 and H.264 video decoding acceleration
<b>LAN</b>	1 VIA VT6130 PCIe Gigabit Ethernet controller
<b>Audio</b>	VIA VT2021 High Definition Audio Codec
<b>Super I/O</b>	Fintek F81801U-I
<b>Expansion I/O</b>	2 PCIe x1 + 1 USB 2.0 (through high speed extension)
<b>Onboard I/O</b>	2 SATA connectors 1 SATA power connector 1 USB pin header for 5 ports 1 Single-channel 24-bit LVDS panel connector 1 LPC pin header 1 SMBus pin header 1 Digital I/O pin header (4 GPI + 4 GPO) 1 Audio pin header for Line-out, Mic-in 1 Ethernet pin header 1 Smart Fan pin header for system 2 UART port pin-headers 1 Backlight control for panel 1 DC-in connector 2 PCIe x1 + 1 USB 2.0 port (through high speed extension)
<b>Back Panel I/O</b>	2 USB 2.0 ports 1 HDMI port 1 VGA port 1 Gigabit Ethernet port
<b>Power Supply</b>	12V DC-in
<b>Operating System</b>	Windows 7, WES 7, Windows CE, Linux
<b>System Monitoring &amp; Management</b>	Wake-on LAN, Keyboard Power-on, Timer Power-on, System power management, AC power failure recovery, Watch Dog Timer
<b>Operating Temperature</b>	0°C ~ 60°C
<b>Operating Humidity</b>	0% ~ 95% (non-condensing)
<b>Form Factor</b>	Pico-ITX (10cm x 7.2cm, 3.9" x 2.8")
<b>Compliance</b>	CE/FCC




## Back Panel I/O



I/O of EPIA-P900 Board

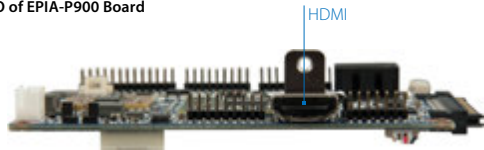

I/O of EPIA-P900 Board with P830-A

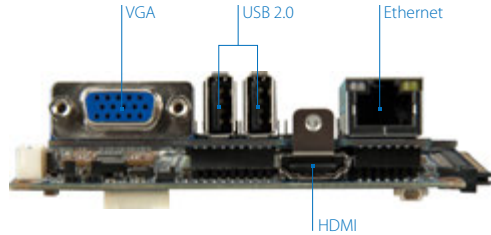

## Accessories



**LPC-01/02/04**  
Up to 4 additional COM ports



**P830-A (Pre-assembled)**  
VGA/Gigabit Ethernet/2 USB 2.0



**EMIO-1533 USB Wi-Fi Module**  
802.11b/g/n standards

## Ordering Information

Model Name	CPU Frequency	Description
EPIA-P900-10	VIA Eden® X2 @ 1.0GHz	Pico-ITX board with 1.0GHz VIA Eden® X2 CPU, HDMI, VGA, LVDS, 8 USB 2.0, Gigabit Ethernet, 2 SATA, 12V DC-in, Pre-assembled P830-A I/O card

## Optional Accessories


### I/O Expansion Cards

Part Number	Description
LPC-01	Expansion module for four COM ports
LPC-02	Expansion module for four COM ports (5V or 12V)
LPC-04	Expansion module for two or four COM ports (5V or 12V)

### Wireless Modules

Part Number	Description
EMIO-1533-00A2	VNT9271 IEEE 802.11 b/g/n USB Wi-Fi module with assembly kit

## Block Diagram

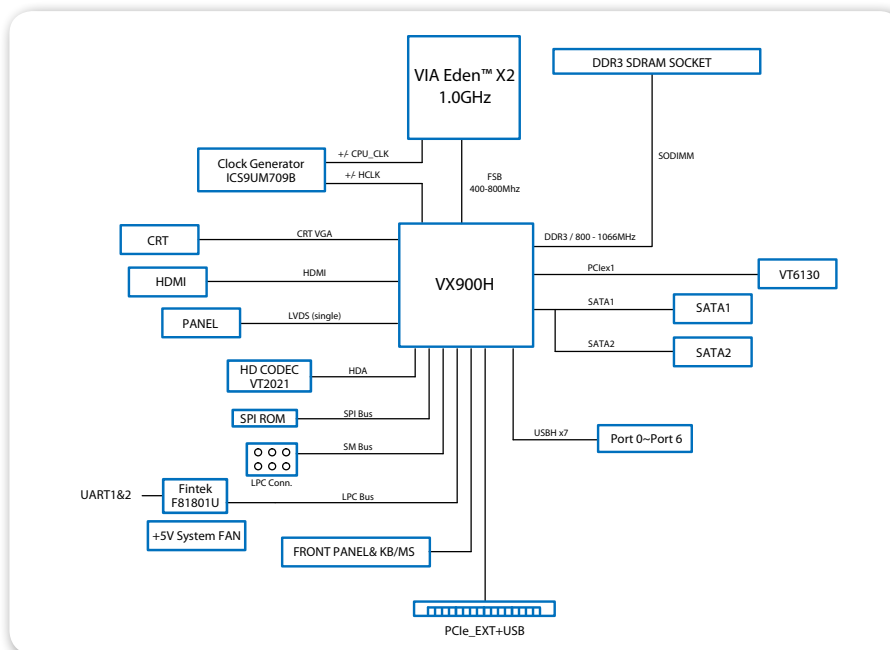

## Packing List

Items
P830-A I/O card (pre-assembled)
DC power cable
SATA cable
SATA power cable

Mini-ITX

# Quick Guide

Model	EPIA-M920 <b>NEW</b>	EPIA-M910	EPIA-M900	EPIA-M860	VB7009 <b>NEW</b>
Processor	2.0GHz VIA QuadCore E-Series 1.6GHz VIA Eden® X4 1.0GHz VIA Eden® X2	1.2GHz VIA QuadCore E-Series 1.6GHz VIA Nano® X2 E-Series 1.0GHz VIA Eden X2	1.2GHz VIA QuadCore E-Series 1.6GHz VIA Nano® X2 E-Series 1.0GHz VIA Eden®X2 E-Series	1.2GHz VIA Nano® E-Series	1.2GHz VIA Eden® X4 1.6GHz VIA C7®-D 1.0GHz VIA C7®
Chipset	VIA VX11H MSP	VIA VX900 MSP	VIA VX900H MSP	VIA VX900H MSP	VIA VX900 MSP
Graphics	Integrated VIA Chrome® 640 DX11 3D/2D graphics with MPEG-2, WMV9, VC1 and H.264 video decoding acceleration	Integrated VIA Chrome®9 HD DX9 3D/2D graphics with MPEG-2, WMV9, VC1 and H.264 video decoding acceleration	Integrated VIA Chrome®9 HD DX9 3D/2D graphics with MPEG-2, WMV9, VC1 and H.264 video decoding acceleration	Integrated VIA Chrome®9 HD DX9 3D/2D graphics with MPEG-2, WMV9, VC1 and H.264 video decoding acceleration	Integrated VIA Chrome®9 HD DX9 3D/2D graphics with MPEG-2, WMV9, VC1 and H.264 video decoding acceleration
System Memory	2 DDR3 1333 SDRAM (SODIMM) (Max. 16GB)	2 DDR3 1066 SDRAM (DIMM) (Max. 8GB)	2 DDR3 1066 SDRAM (SODIMM) (Max. 8GB)	1 DDR3 1066 SDRAM (DIMM) (Max. 4GB)	1 DDR3 1066 SDRAM (DIMM) (Max. 4GB)
Storage	2 SATA connectors	2 SATA connectors	2 SATA connectors	2 SATA connectors	2 SATA connectors
Audio	HD	HD	HD	HD	HD
Display I/O	2 HDMI 1 VGA 1 Single-CH LVDS 1 Dual-CH LVDS	1 HDMI 1 VGA 1 Single-CH LVDS 1 Dual-CH LVDS	1 HDMI 1 VGA 1 Dual-CH LVDS	1 HDMI 1 VGA	1 VGA 1 Dual-CH LVDS
USB	3 USB 3.0 6 USB 2.0	8 USB 2.0	8 USB 2.0	7 USB 2.0	8 USB 2.0
LAN	2 Gigabit Ethernet	2 Gigabit Ethernet	1 Gigabit Ethernet (+1 optional)	1 Gigabit Ethernet	2 Gigabit Ethernet
COM	4 (3 pin headers)	8 (6 pin headers)	4 (3 pin headers)	4 (3 pin headers)	6 (5 pin headers, 2 are optional)
Digital I/O	1	2	2	1	1
Expansion I/O	1 PCIe x4	1 PCIe x1 1 PCI	1 PCI 1 PCIe x16 (with effective speed up to PCIe x8)	1 PCIe x1 1 PCI 1 miniPCIe	1 PCI
Power Supply	ATX connector	ATX connector 12V DC-in	ATX connector	ATX connector 12V DC-in	ATX connector
Operating System	Windows 8.1/8/7, WES 7, Linux, POSReady 7	Windows 7, WES 7, Windows CE, Linux, POSReady 7	Windows 7, WES 7, Windows CE, Linux	Windows 7, WES 7, Windows CE, Linux, POSReady 7	Windows 7, WES 7, Windows CE, Linux, POSReady 7
Operating Temperature	0°C ~ 60 °C	0°C ~ 60°C	0°C ~ 60°C	0°C ~ 60°C	0°C ~ 60°C
Optional Accessories	EMIO-1533 USB Wi-Fi LPC-01/02/04 PWB-M120	EMIO-1533 USB Wi-Fi LPC-01/02/04 PWB-M120 PCIE-03 EXT-PCI	EMIO-1533 USB Wi-Fi PWB-M120 EXT-PCI	EMIO-1533 USB Wi-Fi PWB-M120 PCIE-03 EXT-PCI	EMIO-1533 USB Wi-Fi LPC-01/02/04 PWB-M120 EXT-PCI

## Mini-ITX Series

**NEW**

VIA


# EPIA-M920

Highly-integrated low-power platform with rich feature set and multimedia capabilities

## Features

- Compact 17cm x 17cm Mini-ITX form factor
- Fanless 1.6GHz VIA Eden® X4 and 1.0GHz VIA Eden® X2 processor options
- Dual Gigabit Ethernet
- DX11 graphics with MPEG-2/WMV9/VC1/H.264 decoding acceleration
- Rich feature set

## Board Placement

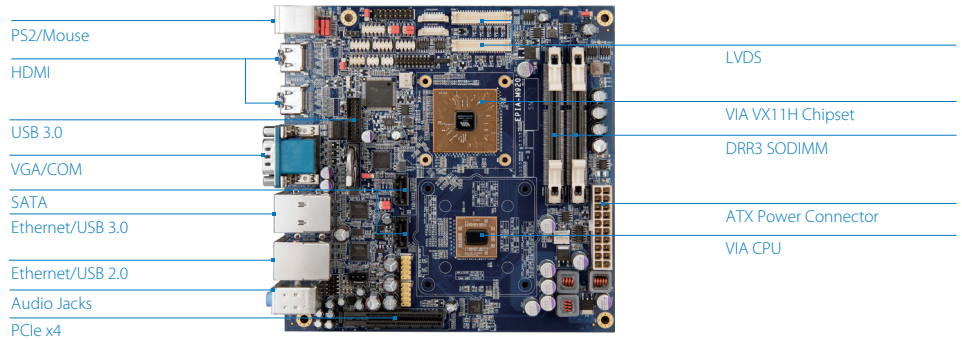

## Specifications

Model Name	EPIA-M920-20Q	EPIA-M920-16QE	EPIA-M920-10E
<b>Processor</b>	2.0GHz VIA QuadCore E-Series (with Fan)	1.6GHz VIA Eden® X4 (Fanless)	1.0GHz VIA Eden® X2 (Fanless)
<b>Chipset</b>	VIA VX11H Media System Processor		
<b>BIOS</b>	AMI Aptio UEFI BIOS, 4MB Flash memory		
<b>System Memory</b>	2 DDR3 1333 SODIMM slots Up to 8GB memory per slot		
<b>Storage</b>	2 SATA connectors		
<b>Graphics</b>	Integrated Chrome® 640 DX11 3D/2D graphics with MPEG-2, WMV9, VC1 and H.264 video decoding acceleration		
<b>LAN</b>	Realtek RTL8111G		
<b>Audio</b>	VIA VT2021 High Definition Audio Codec		
<b>Super I/O</b>	Fintek F71869E		
<b>Expansion I/O</b>	1 PCIe x4 slot		
<b>Onboard I/O</b>	2 SATA connectors 2 SATA DOM power selectors 1 USB 3.0 pin header for 1 port 2 USB 2.0 pin headers for 4 ports 1 Dual channel 18/24-bit LVDS panel connector 1 Single channel 18/24-bit LVDS panel connector 3 COM port pin headers (powered with selectable 5V/12V) 1 LPC pin header 1 SMBus pin header 1 S/PDIF-out connector 1 Digital I/O pin header (4 GPI + 4 GPO) 1 Front audio pin header for Line-out, Mic-in 2 Smart Fan pin headers for CPU and system 2 Backlight control connectors for inverter power and brightness control 1 SD card (SDHC/SDXC) pin header 1 ATX power connector 1 PCIe x4 slot		
<b>Back Panel I/O</b>	2 USB 3.0 ports 2 HDMI ports 1 VGA port 1 COM (powered with selectable 5V/12V) 2 Gigabit Ethernet ports 3 Audio jacks: Line-in, Line-out, and Mic-in 2 PS/2 keyboard/mouse ports		
<b>Power Supply</b>	ATX power connector		
<b>Operating System</b>	Windows 8.1/8/7, WES 7, Linux, POSReady 7		
<b>System Monitoring &amp; Management</b>	Wake-on-LAN, Keyboard Power-on, Timer Power-on, System power management, AC power failure recovery, Watch Dog Timer		
<b>Operating Temperature</b>	0°C ~ 60°C		
<b>Operating Humidity</b>	0% ~ 95% (non-condensing)		
<b>Form Factor</b>	Mini-ITX (17cm x 17cm, 6.7" x 6.7")		
<b>Compliance</b>	CE/FCC		



VIA Embedded  
ARM Boards


VIA Embedded  
ARM Systems

VIA Embedded  
x86 Boards


VIA Embedded  
x86 Systems

VIA Embedded  
Accessories

## Back Panel I/O

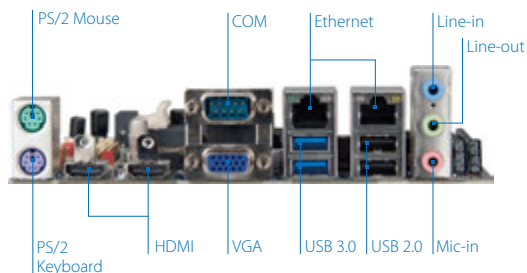

## Accessories

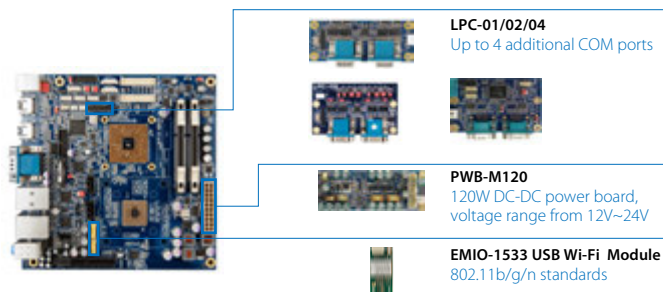

## Ordering Information

Model Name	CPU Frequency	Description
EPIA-M920-20Q	VIA QuadCore E-Series @ 2.0GHz	Mini-ITX board with 2.0GHz VIA QuadCore E-Series CPU with 2 HDMI, VGA, 2 LVDS, 3 USB 3.0, 6 USB 2.0, 4 COM, 2 Gigabit Ethernet, 2 SATA, PCIe, ATX power connector
EPIA-M920-16QE	VIA Eden® X4 @ 1.6GHz	Mini-ITX board with 1.6GHz VIA Eden® X4 CPU with 2 HDMI, VGA, 2 LVDS, 3 USB 3.0, 6 USB 2.0, 4 COM, 2 Gigabit Ethernet, 2 SATA, PCIe, ATX power connector
EPIA-M920-10E	VIA Eden® X2 @ 1.0GHz	Mini-ITX board with 1.0GHz VIA Eden® X2 CPU with 2 HDMI, VGA, 2 LVDS, 3 USB 3.0, 6 USB 2.0, 4 COM, 2 Gigabit Ethernet, 2 SATA, PCIe, ATX power connector

## Optional Accessories


### I/O Expansion Cards

Part Number	Description
LPC-01	Expansion module for four COM ports
LPC-02	Expansion module for four COM ports (5V or 12V)
LPC-04	Expansion module for two or four COM ports (5V or 12V)
PWB-M120	120W DC-DC power board, voltage range from 12V~24V

### Wireless Modules

Part Number	Description
EMIO-1533-00A2	VNT9271 IEEE 802.11 b/g/n USB Wi-Fi module with assembly kit

## Block Diagram

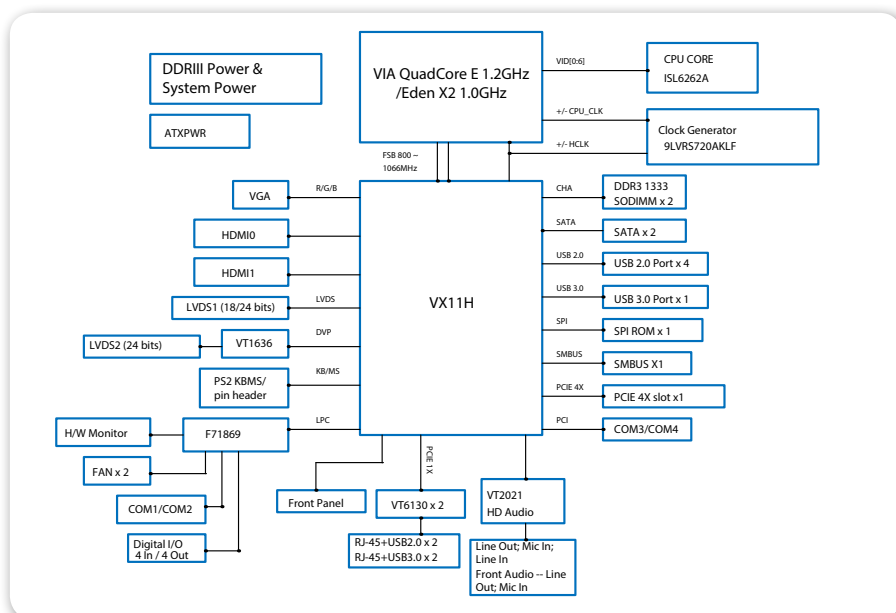

## Packing List

Items
SATA cable
I/O bracket

## Mini-ITX Series

VIA

# EPIA-M910


Highly-integrated Mini-ITX board with rich feature set and multiple expansion options

## Features

- Compact 17cm x 17cm Mini-ITX form factor
- 1.2GHz VIA QuadCore E-Series/1.6GHz VIA Nano® X2 E-Series processor
- Fanless 1.0GHz VIA Eden® X2 processor option
- DX9 graphics with MPEG-2/WMV9/VC1/H.264 decoding acceleration
- Rich feature set



## Board Placement

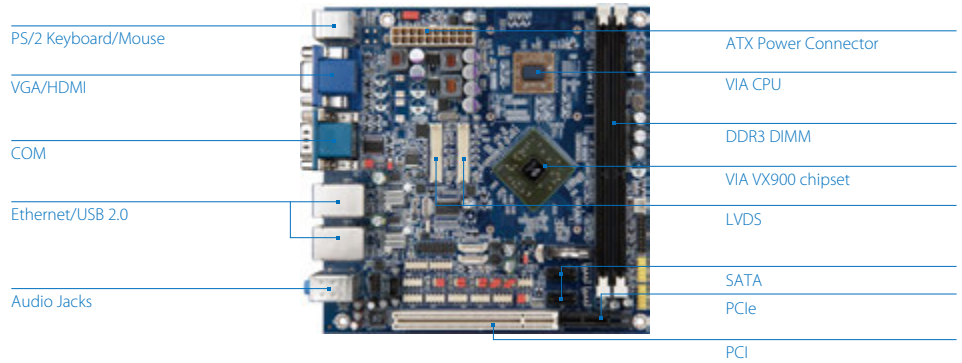

## Specifications

Model Name	EPIA-M910-12Q/PQ	EPIA-M910-16/P	EPIA-M910-10E/PE
<b>Processor</b>	1.2GHz VIA QuadCore E-Series (with fan)	1.6GHz VIA Nano® X2 E-Series (with fan)	1.0GHz VIA Eden® X2 (fanless)
<b>Chipset</b>	VIA VX900 Media System Processor		
<b>BIOS</b>	AMI BIOS, 8Mbit Flash memory		
<b>System Memory</b>	2 DDR3 1066 DIMM sockets Up to 4GB memory size per slot		
<b>Storage</b>	2 SATA connectors		
<b>Graphics</b>	Integrated VIA Chrome®9 HD DX9 3D/2D graphics with MPEG-2, WMV9, VC1 and H.264 video decoding acceleration		
<b>LAN</b>	2 VIA VT6130 PCIe Gigabit Ethernet controllers		
<b>Audio</b>	VIA VT2021 High Definition Audio Codec		
<b>Super I/O</b>	Fintek F81865F-I + F81801		
<b>Expansion I/O</b>	1 PCI slot 1 PCIe x1 slot		
<b>Onboard I/O</b>	2 SATA connectors 2 SATA power connectors (DC-in SKU), 2 SATA DOM power selectors 2 USB 2.0 pin headers for 4 ports 1 Dual-channel 18/24-bit LVDS panel connector 1 Single-channel 18/24-bit LVDS panel connector 6 COM port pin headers (powered with selectable 5V/12V) 1 LPC pin header 1 SMBus pin header 1 S/PDIF-out connector 2 Digital I/O pin headers (8 GPI + 8 GPO) 1 Front audio pin header for Line-out, Mic-in 2 Smart Fan pin headers for CPU and system 1 ATX or DC-in power connector 1 PCI slot 1 PCIe x1 slot		
<b>Back Panel I/O</b>	4 USB ports 1 HDMI port 1 VGA port 2 COM ports (powered with selectable 5V/12V) 2 Gigabit Ethernet ports 3 Audio jacks: Line-in, Line-out and Mic-in 2 PS/2 keyboard/mouse ports		
<b>Power Supply</b>	ATX power connector or 12V DC-in		
<b>Operating System</b>	Windows 7, WES 7, Windows CE, Linux, POSReady 7		
<b>System Monitoring &amp; Management</b>	Wake-on-LAN, Keyboard Power-on, Timer Power-on, System power management, AC power failure recovery, Watch Dog Timer		
<b>Operating Temperature</b>	0°C ~ 60°C		
<b>Operating Humidity</b>	0% ~ 95% (non-condensing)		
<b>Form Factor</b>	Mini-ITX (17cm x 17cm, 6.7" x 6.7")		
<b>Compliance</b>	CE/FCC		

VIA Embedded  
ARM Boards

VIA Embedded  
ARM Systems


VIA Embedded  
x86 Boards

VIA Embedded  
x86 Systems


VIA Embedded  
Accessories



## Back Panel I/O

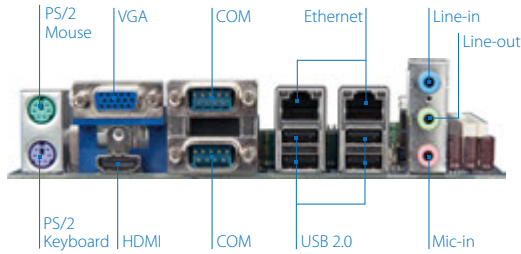

## Accessories



**PWB-M120**  
120W DC-DC power board,  
voltage range from 12V~24V



**LPC-01/02/04**  
Up to 4 additional COM ports



**EMIO-1533 USB Wi-Fi Module**  
802.11b/g/n standards



**PCIE-03**  
PCI & 1-lane PCIe riser card



**EXT-PCI**  
One to two PCI riser card

## Ordering Information

Model Name	CPU Frequency	Description
EPIA-M910-12Q	VIA QuadCore E-Series @ 1.2GHz	Mini-ITX Board with 1.2GHz VIA QuadCore E-Series CPU with HDMI, VGA, 2 LVDS, 8 USB 2.0, 8 COM, 2 Gigabit Ethernet, 2 SATA, PCI, PCIe, ATX power connector
EPIA-M910-12PQ	VIA QuadCore E-Series @ 1.2GHz	Mini-ITX Board with 1.2GHz VIA QuadCore E-Series CPU with HDMI, VGA, 2 LVDS, 8 USB 2.0, 8 COM, 2 Gigabit Ethernet, 2 SATA, PCI, PCIe, 12V DC-in
EPIA-M910-16	VIA Nano® X2 E-Series @ 1.6GHz	Mini-ITX Board with 1.6GHz VIA Nano® X2 E-Series CPU with HDMI, VGA, 2 LVDS, 8 USB 2.0, 8 COM, 2 Gigabit Ethernet, 2 SATA, PCI, PCIe, ATX power connector
EPIA-M910-16P	VIA Nano® X2 E-Series @ 1.6GHz	Mini-ITX Board with 1.6GHz VIA Nano® X2 E-Series CPU with HDMI, VGA, 2 LVDS, 8 USB 2.0, 8 COM, 2 Gigabit Ethernet, 2 SATA, PCI, PCIe, 12V DC-in
EPIA-M910-10E	VIA Eden® X2 @ 1.0GHz	Mini-ITX Board with 1.0GHz VIA Eden® X2 CPU with HDMI, VGA, 2 LVDS, 8 USB 2.0, 8 COM, 2 Gigabit Ethernet, 2 SATA, PCI, PCIe, ATX power connector
EPIA-M910-10PE	VIA Eden® X2 @ 1.0GHz	Mini-ITX Board with 1.0GHz VIA Eden® X2 CPU, with HDMI, VGA, 2 LVDS, 8 COM, 8 USB 2.0, 2 Gigabit Ethernet, 2 SATA, PCI, PCIe, 12V DC-in


## Optional Accessories

I/O Expansion Cards	
Part Number	Description
LPC-01	Expansion module for four COM ports
LPC-02	Expansion module for four COM ports (5V or 12V)
LPC-04	Expansion module for two or four COM ports (5V or 12V)
PWB-M120	120W DC-DC power board, voltage range from 12V~24V
PCIE-03	PCI & 1-lane PCIe riser card
EXT-PCI	One to two PCI riser card

Wireless Modules	
Part Number	Description
EMIO-1533-00A2	VNT9271 IEEE 802.11 b/g/n USB Wi-Fi module with assembly kit

## Block Diagram

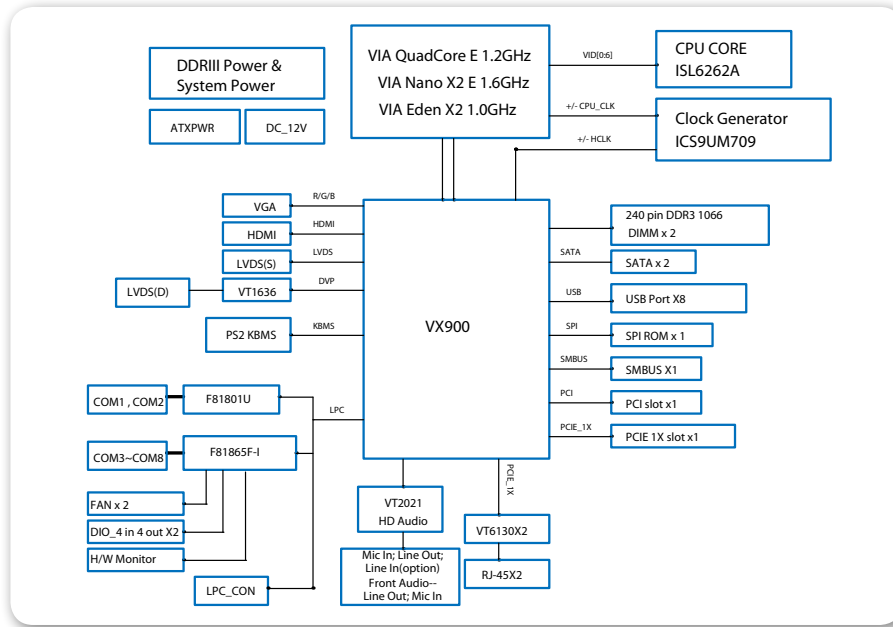

## Packing List

Items
SATA cable
I/O bracket
SATA power cable (for DC-in sku only)
DC power cable (for DC-in sku only)

## Mini-ITX Series


# VIA EPIA-M900

High-performance Mini-ITX board with rich I/O and connectivity features

## Features

- Compact 17cm x 17cm Mini-ITX form factor
- 1.2GHz VIA QuadCore E-Series processor / 1.6GHz VIA Nano®X2 E-Series processor
- Fanless 1.0GHz VIA Eden®X2 processor
- DX9 graphics with MPEG-2/WMV9/VC1/H.264 decoding acceleration
- Advanced I/O and connectivity features

## Board Placement

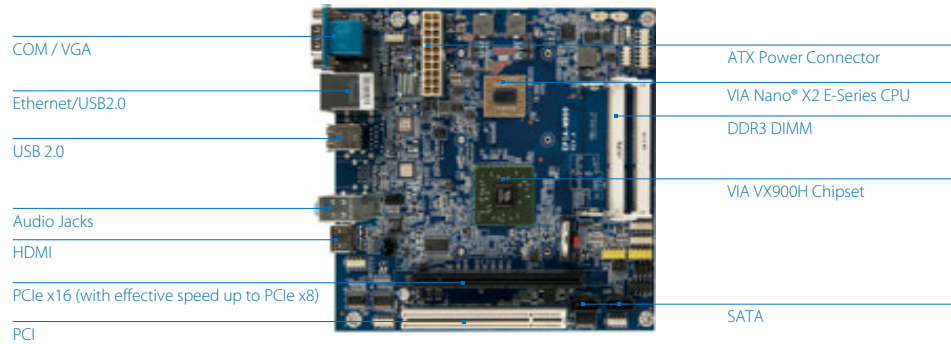


## Specifications


Model Name	EPIA-M900-16L	EPIA-M900-12LQ	EPIA-M900-10LE
<b>Processor</b>	1.6GHz VIA Nano® X2 E-Series (with fan)	1.2GHz VIA QuadCore E-Series (with fan)	1.0GHz VIA Eden®X2 (fanless)
<b>Chipset</b>	VIA VX900H Media System Processor		
<b>BIOS</b>	AMI BIOS, 8Mbit Flash memory		
<b>System Memory</b>	2 DDR3 1066 DIMM slots Up to 4GB memory size per slot		
<b>Storage</b>	2 SATA connectors		
<b>Graphics</b>	Integrated VIA Chrome®9 HD DX9 3D/2D graphics with MPEG-2, WMV9, VC1 and H.264 video decoding acceleration		
<b>LAN</b>	1 Default VIA VT6130 PCIe Gigabit Ethernet controller; additional manufacturing option		
<b>Audio</b>	VIA VT2021 High Definition Audio Codec		
<b>Super I/O</b>	Fintek F81865F-I		
<b>Expansion I/O</b>	1 PCI slot 1 PCIe x16 slot		
<b>Onboard I/O</b>	2 SATA connectors 2 USB 2.0 pin headers for 4 ports 1 Dual-channel 24-bit LVDS panel connector 3 COM port pin headers 1 LPC pin header 1 SMBus pin header 1 S/PDIF-out connector 2 Digital I/O (8 GPI + 8 GPO) 1 Front-audio pin header for Line-out, Mic-in 2 Smart Fan pin headers for CPU and system 1 Backlight control for inverter power and brightness control 1 ATX power connector 1 PCI slot (on edge) 1 PCIe x16 slot (with effective speed up to PCIe x8)		
<b>Back Panel I/O</b>	4 USB 2.0 ports 1 HDMI port 1 VGA port 1 COM port 1 Gigabit Ethernet port 3 Audio jacks: Line-in, Line-out and Mic-in		
<b>Power Supply</b>	ATX power connector		
<b>Operating System</b>	Windows 7, WES 7, Windows CE, Linux		
<b>System Monitoring &amp; Management</b>	Wake-on-LAN, Keyboard Power-on, Timer Power-on, System power management, AC power failure recovery, Watch Dog Timer		
<b>Operating Temperature</b>	0°C ~ 60°C		
<b>Operating Humidity</b>	0% ~ 95% (non-condensing)		
<b>Form Factor</b>	Mini-ITX (17cm x 17cm, 6.7" x 6.7")		
<b>Compliance</b>	CE/FCC		



## Back Panel I/O

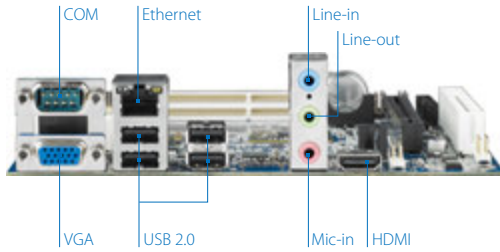

## Accessories

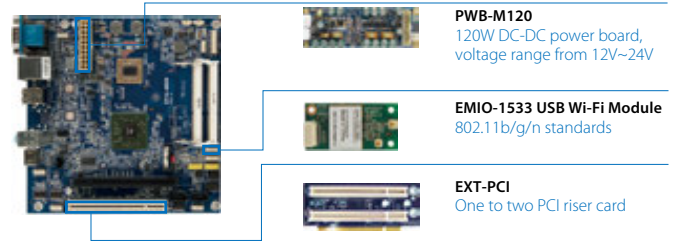

## Ordering Information

Model Name	CPU Frequency	Description
EPIA-M900-16L	VIA Nano® X2 E-Series @ 1.6GHz	Fan based Mini-ITX board with 1.6GHz VIA Nano® X2 E-Series CPU with HDMI, VGA, LVDS, 8 USB 2.0, 4 COM, Gigabit Ethernet, 2 SATA, PCI, PCIe, ATX power connector
EPIA-M900-12LQ	VIA QuadCore E-Series @ 1.2GHz	Fan based Mini-ITX board with 1.2GHz VIA QuadCore E-Series CPU with HDMI, VGA, LVDS, 8 USB 2.0, 4 COM, Gigabit Ethernet, 2 SATA, PCI, PCIe, ATX power connector
EPIA-M900-10LE	VIA Eden® X2 @ 1.0GHz	Fanless based Mini-ITX board with 1.0GHz VIA Eden® X2 CPU, LVDS, HDMI, VGA, 8 USB 2.0, 4 COM, Gigabit Ethernet, 2 SATA, PCI, PCIe, ATX power connector


## Optional Accessories

I/O Expansion Cards	
Part Number	Description
PWB-M120	120W DC-DC power board, voltage range from 12V~24V
EXT-PCI	One to two PCI riser card

## Wireless Modules

Part Number	Description
EMIO-1533-00A2	VNT9271 IEEE 802.11 b/g/n USB Wi-Fi module with assembly kit

## Block Diagram

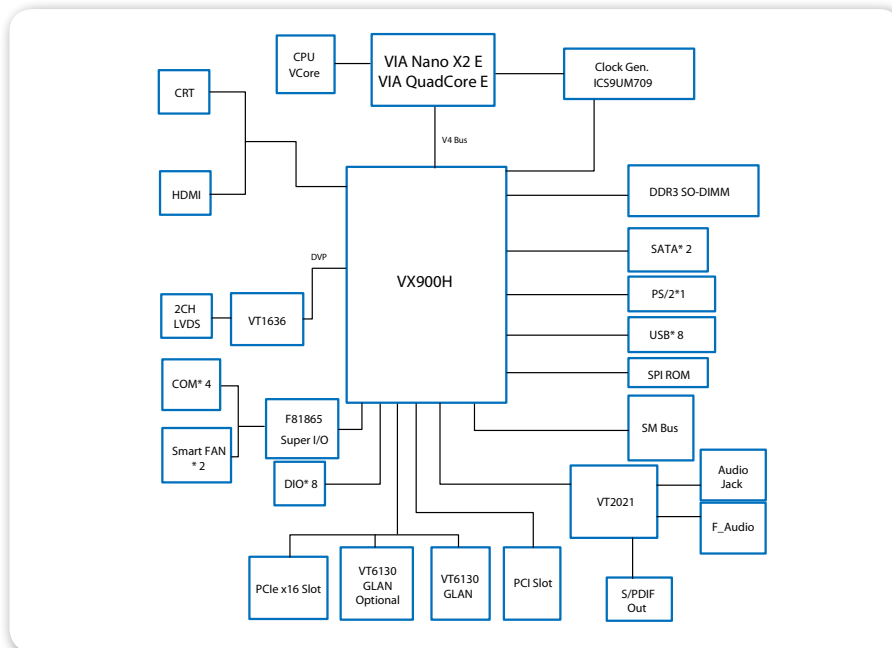

## Packing List

Items
SATA cable
I/O bracket

VIA Embedded  
ARM Boards  
VIA Embedded  
ARM Systems  
VIA Embedded  
x86 Boards  
VIA Embedded  
x86 Systems  
VIA Embedded  
Accessories

## Mini-ITX Series


# VIA EPIA-M860

Fanless Mini-ITX board with rich multimedia, I/O, and connectivity features

## Features

- Compact 17cm x 17cm Mini-ITX form factor
- Fanless 1.2GHz VIA Nano® E-Series processor
- DX9 graphics with MPEG-2/WMV9/VC1/H.264 decoding acceleration
- Advanced I/O and connectivity features
- Supports four COM ports (three as pin headers)

## Board Placement

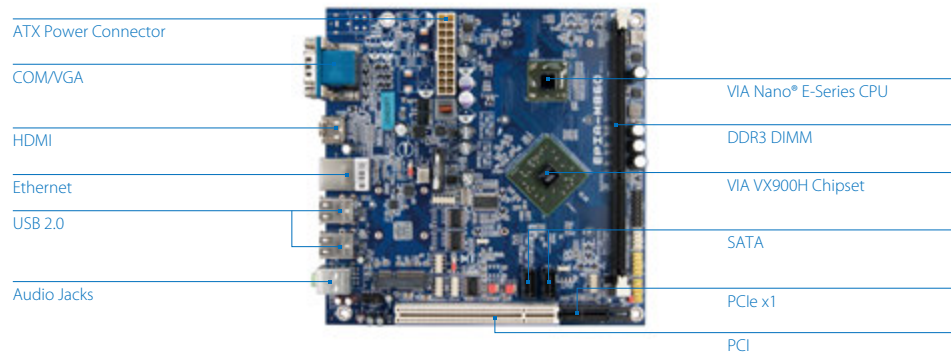


## Specifications


<b>Model Name</b>	<b>EPIA-M860-12E/PE</b>
<b>Processor</b>	1.2GHz VIA Nano® E-Series
<b>Chipset</b>	VIA VX900H Media System Processor
<b>BIOS</b>	AMI BIOS, 8Mbit Flash memory
<b>System Memory</b>	1 DDR3 1066 DIMM slot Up to 4GB memory size
<b>Storage</b>	2 SATA connectors
<b>Graphics</b>	Integrated VIA Chrome®9 HD DX9 3D/2D graphics with MPEG-2, WMV9, VC1 and H.264 video decoding acceleration
<b>LAN</b>	VIA VT6130 PCIe Gigabit Ethernet controller
<b>Audio</b>	VIA VT1708S High Definition Audio Codec
<b>Super I/O</b>	Fintek F81865F-I
<b>Expansion I/O</b>	1 PCI 1 PCIe x1 slot 1 miniPCIe slot
<b>Onboard I/O</b>	2 SATA connectors 2 USB 2.0 pin headers for 3 ports 3 COM port pin headers (2 additional COM ports optional) 1 SMBus pin header 1 Digital I/O pin header (4 GPI + 4 GPO) 1 Front audio pin header for Line-out, Mic-in 2 Smart Fan pin headers for CPU and system 1 ATX power connector or 12V DC-in 1 PCI 1 PCIe x1 slot 1 miniPCIe
<b>Back Panel I/O</b>	4 USB 2.0 ports 1 HDMI port 1 VGA port 1 COM port 1 Gigabit Ethernet port 2 Audio jacks: Line-out and Mic-in (Line-in reserved) 1 DC-in jack (for EPIA-M860-12PE)
<b>Power Supply</b>	ATX power connector or 12V DC-in
<b>Operating System</b>	Windows 7, WES 7, Windows CE, Linux, POSReady 7
<b>System Monitoring &amp; Management</b>	Wake-on-LAN, Keyboard Power-on, Timer Power-on, System power management, AC power failure recovery, Watch Dog Timer
<b>Operating Temperature</b>	0°C ~ 60°C
<b>Operating Humidity</b>	0% ~ 95% (non-condensing)
<b>Form Factor</b>	Mini-ITX (17cm x 17cm, 6.7" x 6.7")
<b>Compliance</b>	CE/FCC



## Back Panel I/O

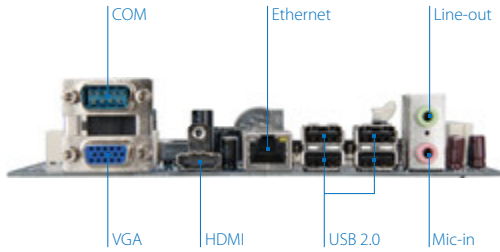

## Accessories

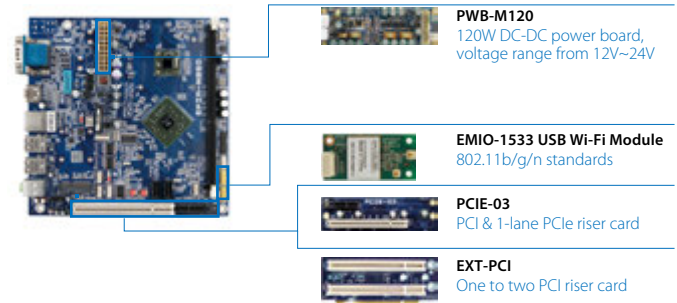

## Ordering Information

Model Name	CPU Frequency	Description
EPIA-M860-12E	VIA Nano® E-Series @ 1.2GHz	Mini-ITX Board with 1.2GHz VIA Nano® E-Series CPU, HDMI, VGA, 7 USB 2.0, 4 COM, Gigabit Ethernet, 2 SATA, PCI, PCIe x1, MiniPCIe, ATX power connector
EPIA-M860-12PE	VIA Nano® E-Series @ 1.2GHz	Mini-ITX Board with 1.2GHz VIA Nano® E-Series CPU, HDMI, VGA, 7 USB 2.0, 4 COM, Gigabit Ethernet, 2 SATA, PCI, PCIe x1, MiniPCIe, 12V DC-in

## Optional Accessories


### I/O Expansion Cards

Part Number	Description
PWB-M120	120W DC-DC power board, voltage range from 12V~24V
PCIE-03	PCI & 1-lane PCIe riser card
EXT-PCI	One to two PCI riser card

### Wireless Modules

Part Number	Description
EMIO-1533-00A2	VNT9271 IEEE 802.11 b/g/n USB Wi-Fi module with assembly kit

## Block Diagram

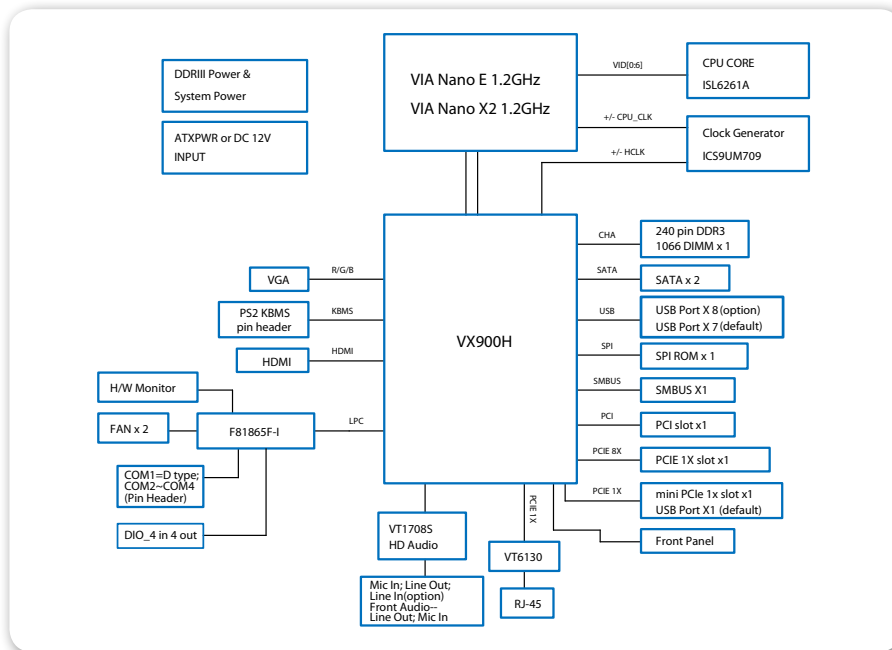

## Packing List

Items
SATA cable
I/O bracket



## Mini-ITX Series

NEW

VIA

# VB7009

Flexible Mini-ITX board with advanced multimedia, I/O, and connectivity features

## Features

- Compact 17cm x 17cm Mini-ITX form factor
- Choice of VIA Eden® X4, VIA C7®-D, and VIA C7® processors
- DX9 graphics with MPEG-2/WMV9/VC1/H.264 decoding acceleration
- Rich I/O and connectivity features
- Supports up to six onboard COM ports

## Board Placement

PS2 Keyboard/Mouse

Parallel Port/COM/VGA

Gigabit Ethernet/USB

Audio Jacks



ATX Power Connector

VIA CPU

DDR3 DIMM

VIA VX900 Chipset

SATA


PCI

## Specifications


Model Name	VB7009-12QCE	VB7009-16	VB7009-10E
<b>Processor</b>	1.2GHz VIA Eden® X4 (Fanless)	1.6GHz VIA C7®-D (with fansink)	1.0GHz VIA C7® (with heatsink)
<b>Chipset</b>	VIA VX900 Media System Processor		
<b>BIOS</b>	AMI BIOS, 8Mbit Flash memory		
<b>System Memory</b>	1 DDR3 1066 DIMM slot Up to 4GB memory size		
<b>Storage</b>	2 SATA connectors		
<b>Graphics</b>	Integrated VIA Chrome®9 HD DX9 3D/2D graphics with MPEG-2, WMV9, VC1 and H.264 video decoding acceleration		
<b>LAN</b>	2 VIA VT6130 PCIe Gigabit Ethernet controllers		
<b>Audio</b>	VIA VT1708S High Definition Audio Codec		
<b>Super I/O</b>	Fintek F81865F-I		
<b>Expansion I/O</b>	1 PCI slot		
<b>Onboard I/O</b>	2 SATA connectors 2 USB 2.0 pin headers for 4 ports 1 Dual-channel 18/24 bit LVDS panel connector 1 LVDS panel power selector (5V/3.3V) 1 LVDS inverter pin header 1 LVDS inverter power selector (5V/12V) 5 COM port pin headers 2 optional (powered with selectable 5V/12V) 1 LPC pin header 1 SMBus pin header 1 S/PDIF-out connector 1 Digital I/O pin header (4 GPI + 4 GPO) 1 Front audio pin header for Line-out, Mic-in 2 Smart Fan pin headers for CPU and system 1 ATX power connector 1 PCI slot		
<b>Back Panel I/O</b>	4 USB 2.0 ports 1 VGA port 1 COM port 1 Parallel port 2 Gigabit Ethernet ports 3 Audio jacks: Line-in, Line-out, and Mic-in 2 PS/2 keyboard/mouse ports		
<b>Power Supply</b>	ATX power connector		
<b>Operating System</b>	Windows 7, WES 7, Windows CE, Linux, POSReady 7		
<b>System Monitoring &amp; Management</b>	AC power failure recovery, RTC timer to power on, Wake-on LAN, Wake-on keyboard, Wake-on mouse		
<b>Operating Temperature</b>	0°C ~ 60°C		
<b>Operating Humidity</b>	0% ~ 95% (non-condensing)		
<b>Form Factor</b>	Mini-ITX (17cm x 17cm, 6.7" x 6.7")		
<b>Compliance</b>	CE/FCC		



## Back Panel I/O

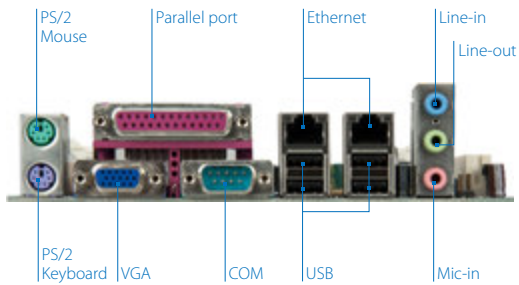

## Accessories

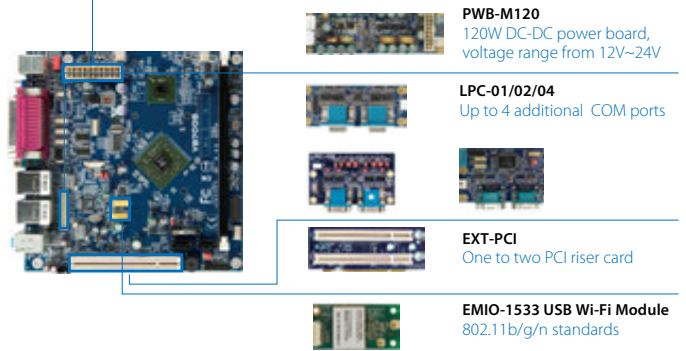

## Ordering Information

Model Name	CPU Frequency	Description
VB7009-12QCE	VIA Eden® X4 @ 1.2GHz	Mini-ITX Board with 1.2GHz VIA Eden® X4 E-Series CPU with VGA, LVDS, 8 USB 2.0, 6 COM, 2 Gigabit Ethernet, 2 SATA, PCI, ATX connector
VB7009-16	VIA C7®-D @ 1.6GHz	Mini-ITX Board with 1.6GHz VIA C7®-D CPU with VGA, LVDS, 8 USB 2.0, 4 COM, 2 Gigabit Ethernet, 2 SATA, PCI, ATX connector
VB7009-10E	VIA C7® @ 1.0GHz	Mini-ITX Board with 1.0GHz VIA C7® CPU with VGA, LVDS, 8 USB 2.0, 4 COM, 2 Gigabit Ethernet, 2 SATA, PCI, ATX connector

## Optional Accessories


### I/O Expansion Cards

Part Number	Description
LPC-01	Expansion module for four COM ports
LPC-02	Expansion module for four COM ports (5V or 12V)
LPC-04	Expansion module for two or four COM ports (5V or 12V)
PWB-M120	120W DC-DC power board, voltage range from 12V~24V
EXT-PCI	One to two PCI riser card

### Wireless Modules

Part Number	Description
EMIO-1533-00A2	VNT9271 IEEE 802.11 b/g/n USB Wi-Fi module with assembly kit

## Block Diagram

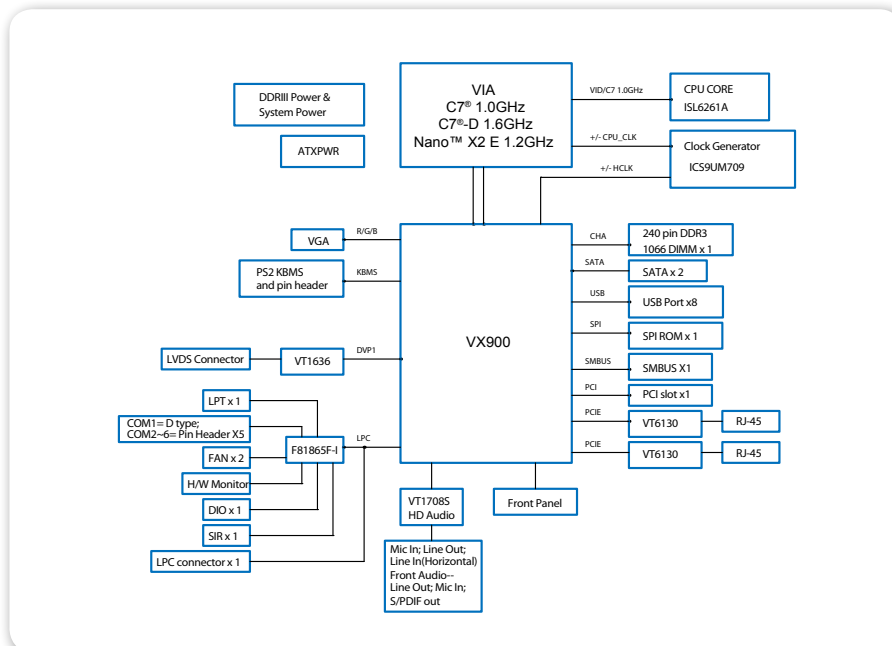

## Packing List

Items
SATA cable
I/O bracket

# Quick Guide

Model	COMe-9X90	COMe-8X92	COMe-8X91	COMe-8X90	ETX-8X90
Form Factor	Basic, Type 6	Compact, Type 6	Mini, Type 10	Basic, Type 6	Compact, ETX 3.02
Processor	1.2GHz VIA Nano® X2 E-Series	1.2GHz VIA Nano® X2 E-Series	800MHz VIA Eden® X2	1.2GHz VIA Nano® X2 E-Series	1.2GHz VIA Nano® X2 E-Series
Chipset	VIA VX11H MSP	VIA VX900H MSP	VIA VX900 MSP	VIA VX900H MSP	VIA VX900 MSP
Graphics	Integrated VIA Chrome® 640 DX11 3D/2D graphics with MPEG-2, WMV9, VC1 and H.264 video decoding acceleration	Integrated VIA Chrome®9 HD DX9 3D/2D graphics with MPEG-2, WMV9, VC1 and H.264 video decoding acceleration	Integrated VIA Chrome®9 HD DX9 3D/2D graphics with MPEG-2, WMV9, VC1 and H.264 video decoding acceleration	Integrated VIA Chrome®9 HD DX9 3D/2D graphics with MPEG-2, WMV9, VC1 and H.264 video decoding acceleration	Integrated VIA Chrome®9 HD DX9 3D/2D graphics with MPEG-2, WMV9, VC1 and H.264 video decoding acceleration
System Memory	2 DDR3 1333 SODIMM (Max. 16GB)	1 DDR3 1066 SODIMM (Max. 4GB)	Onboard 1GB DDR3 1066	2 DDR3 1066 SODIMM (Max. 8GB)	1 DDR3 1066 SDRAM (SODIMM) (Max. 4GB)
Storage	2 SATA	2 SATA	2 SATA	2 SATA	1 SATA
Audio	HD	HD	HD	HD	Stereo
Display I/O	2 HDMI (shared with DP) 2 DisplayPort 1 Dual-CH LVDS	1 HDMI 1 DisplayPort 1 Single-CH LVDS	1 HDMI (shared with DP) 1 DisplayPort 1 Single-CH LVDS	1 HDMI 1 DisplayPort 1 Single-CH LVDS	1 Dual-CH LVDS
USB	2 USB 3.0 6 USB 2.0	4 USB 3.0 4 USB 2.0	8 USB 2.0	4 USB 3.0 4 USB 2.0	4 USB 2.0 2 Mini USB 2.0
LAN	1 Gigabit Ethernet	1 Gigabit Ethernet	1 Gigabit Ethernet	1 Gigabit Ethernet	1 10/100 Mbps Ethernet
COM	2 (TX/RX)	2 (TX/RX)	2 (TX/RX)	2 (TX/RX)	2 (TX/RX)
Expansion I/O	4 1-lane PCIe	1 4-lane PCIe 1 1-lane PCIe	3 1-lane PCIe	1 4-lane PCIe 1 1-lane PCIe	2 PCI 1 ISA
Digital I/O	8 (4 GPI + 4 GPO)	8 (4 GPI + 4 GPO)	8 (4 GPI + 4 GPO)	8 (4 GPI + 4 GPO)	8 (4 GPI + 4 GPO)
Power Supply	ATX connector	ATX connector	ATX connector	ATX connector	ATX connector
Operating System	Windows 7/8, WES 7, Linux	Windows 7, WES 7, Windows CE, Linux	Windows 7, WES 7, Windows CE, Linux	Windows 7, WES 7, Windows CE, Linux	Windows 7, WES 7, Windows CE, Linux
Operating Temperature	0°C ~ 60°C	0°C ~ 50°C	0°C ~ 50°C	0°C ~ 60°C	0°C ~ 60°C
Carrier Board	COMEDB4	COMEDB2	COMEDB3	COMEDB2	ETXDB1

## COM Express Modules


### VIA COMe-9X90

COM Express Module with  
Type 6 pin-outs and Basic  
Form Factor

#### Features

- 1.2GHz VIA Nano® X2 E-Series processor
- Supports up to 16GB 1333 DDR3 SDRAM
- DX11 graphics with MPEG-2/WMV9/VC1/H.264 decoding acceleration
- Supports 18/24-bit dual-channel LVDS panel, two DisplayPort ports, or two HDMI ports
- Supports two USB 3.0 and six USB 2.0 ports

#### Board Placement

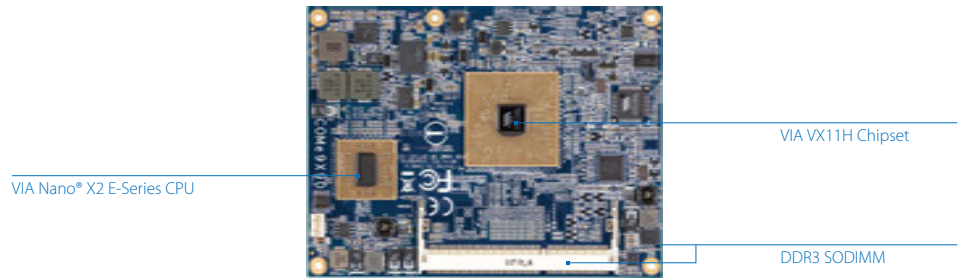

#### Specifications

	COMe-9X90
<b>Processor</b>	1.2GHz VIA Nano® X2 E-Series
<b>Chipset</b>	VIA VX11H Media System Processor
<b>BIOS</b>	AMI Aptio UEFI BIOS, 32Mbit Flash memory
<b>System Memory</b>	2 DDR3 1333 SODIMM slots Up to 8GB memory size per slot
<b>Storage</b>	2 SATA
<b>Graphics</b>	Integrated VIA Chrome®640 DX11 3D/2D graphics with MPEG-2, WMV9, VC1 and H.264 video decoding acceleration
<b>LAN</b>	RealTek RTL8111G PCIe Gigabit Ethernet controller
<b>Audio</b>	1 HD audio digital interface
<b>Supported Expansion I/O</b>	4 PCIe x1
<b>Supported I/O</b>	2 USB 3.0 6 USB 2.0 Up to 2 HDMI or 2 DisplayPort 1 VGA 1 Dual channel 18/24-bit LVDS panel (VIA VT1636) 2 COM (TX/RX) 1 Gigabit Ethernet 1 LPC 1 SMBus 1 SPI 1 SDIO/GPIO 1 I <sup>2</sup> C
<b>Operating System</b>	Windows 7/ 8, WES 7, Linux
<b>System Monitoring &amp; Management</b>	CPU temperature reading, CPU fan speed reading, System voltage monitoring, Watch Dog Timer, Wake-on-LAN, System power management, AC power failure recovery
<b>Operating Temperature</b>	0°C ~ 60°C
<b>Operating Humidity</b>	0% ~ 95% (non-condensing)
<b>Form Factor</b>	9.5cm x 12.5cm (3.73" x 4.92")
<b>Compliance</b>	COM Express® type 6, basic module

VIA Embedded  
ARM Boards


VIA Embedded  
ARM Systems

VIA Embedded  
x86 Boards

VIA Embedded  
x86 Systems

VIA Embedded  
Accessories

## Carrier Board Back Panel I/O

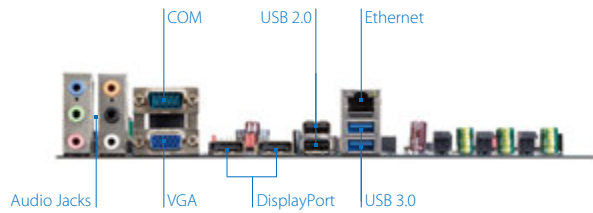

## Carrier Board (COMEDB4)



\* The carrier board is only for evaluation purposes.


## Specifications

<b>Model Name</b>	<b>COMEDB4</b>
<b>Audio</b>	VIA VT2021 High Definition Audio Codec
<b>Super I/O</b>	Fintek F71869 LPC Super I/O
<b>Onboard I/O</b>	<ul style="list-style-type: none"> <li>2 SATA connectors</li> <li>2 USB 2.0 pin headers for 4 ports</li> <li>1 Dual-channel 18/24-bit LVDS panel connector</li> <li>1 COM port pin header (powered with selectable 5V/12V)</li> <li>1 LPT pin header</li> <li>1 LPC pin header</li> <li>1 SMBus pin header</li> <li>1 SPI connector</li> <li>1 Digital I/O (4 GPI + 4 GPO) pin header</li> <li>1 Front audio pin header for Line-out, Mic-in</li> <li>2 Smart Fan connectors for CPU and system</li> <li>1 I<sup>2</sup>C pin header</li> <li>1 BIOS select pin header for select module/carrier board SPI BIOS</li> <li>1 ATX power connector and 1 AUX power connector (for ATX mode), or only 1 AUX power connector (for AT mode)</li> <li>3 PCIe x1</li> <li>1 miniPCIe</li> <li>1 Reset Switch</li> <li>1 Power button</li> </ul>
<b>Front Panel I/O</b>	1 SD card slot
<b>Rear Panel I/O</b>	<ul style="list-style-type: none"> <li>2 USB 3.0 ports</li> <li>2 USB 2.0 ports</li> <li>2 DisplayPort</li> <li>1 VGA port</li> <li>1 COM port</li> <li>1 Gigabit Ethernet port</li> <li>6 Audio jacks (support multi-channel audio outputs)</li> </ul>
<b>Power Supply</b>	ATX power connector or 12V DC-in
<b>Operating Temperature</b>	0°C ~ 60°C
<b>Operating Humidity</b>	0% ~ 95% (non-condensing)
<b>Form Factor</b>	Micro-ATX (25.4cm x 24.4cm, 10" x 9.6")
<b>COM Express Module Type</b>	Supports basic/compact form factor type 6

## Ordering Information

Model Name	CPU Frequency	Description
COMe-9X90	VIA Nano® X2 E-Series @ 1.2GHz	COM Express Module with 1.2GHz VIA Nano® X2 E-Series CPU with 2 HDMI or 2 DisplayPort, VGA, LVDS, 2 USB 3.0, 6 USB 2.0, Gigabit Ethernet, 2 SATA, 4 PCIe, ATX power connector
COMEDB4	N/A	COMe-9X90 evaluation carrier board
99G42-01380A	N/A	Heatsink with fan for COMe-9X90

## Block Diagram

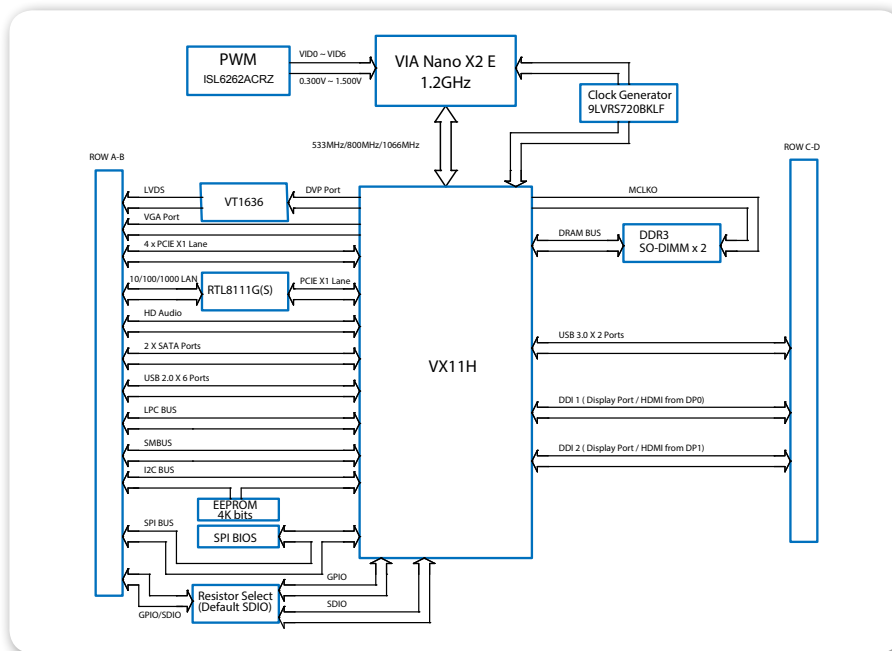



## COM Express Modules


### VIA COMe-8X92

COM Express Module  
with Type 6 pin-outs and  
Compact Form Factor

#### Features

- 1.2GHz VIA Nano® X2 E-Series processor
- Supports up to 4GB 1066 DDR3 SDRAM
- DX9 graphics with MPEG-2/WMV9/VC1/H.264 decoding acceleration
- Display interface for VGA, 18/24-bit single-channel LVDS panel, one DisplayPort, and one HDMI port
- Supports four USB 3.0 and four USB 2.0 ports


#### Board Placement

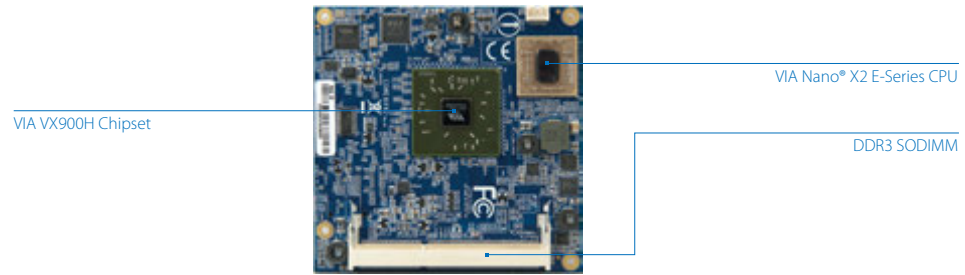

#### Specifications

	COMe-8X92
<b>Processor</b>	1.2GHz VIA Nano® X2 E-Series
<b>Chipset</b>	VIA VX900H Media System Processor
<b>BIOS</b>	AMI BIOS, 4/8Mbit Flash memory
<b>System Memory</b>	1 DDR3 1066 SODIMM slot Up to 4GB memory size
<b>Storage</b>	2 SATA
<b>Graphics</b>	Integrated VIA Chrome®9 HD DX9 3D/2D graphics with MPEG-2, WMV9, VC1 and H.264 video decoding acceleration
<b>LAN</b>	VIA VT6130 Gigabit Ethernet controller
<b>Audio</b>	1 HD audio digital interface
<b>Supported Expansion I/O</b>	1 PCIe x4 1 PCIe x1
<b>Supported I/O</b>	4 USB 3.0 4 USB 2.0 1 HDMI 1 DisplayPort 1 VGA 1 Single-channel 18/24-bit LVDS panel 2 COM (TX/RX) 1 Gigabit Ethernet 1 Digital video output for external HDMI/LVDS/DVI transmitter or TV encoder 1 LPC 1 SMBus 1 SPI 1 SDIO/GPIO 1 I <sup>2</sup> C
<b>Operating System</b>	Windows 7, WES 7, Windows CE, Linux
<b>System Monitoring &amp; Management</b>	CPU temperature reading, CPU fan speed reading, System voltage monitoring, Watch Dog Timer, Wake-on-LAN, System power management, AC power failure recovery
<b>Operating Temperature</b>	0°C ~ 50°C
<b>Storage Temperature</b>	-40°C ~ 70°C
<b>Operating Humidity</b>	0% ~ 95% (non-condensing)
<b>Form Factor</b>	9.5cm x 9.5cm (3.73" x 3.73")
<b>Compliance</b>	COM Express® type 6, compact module

## Carrier Board Back Panel I/O

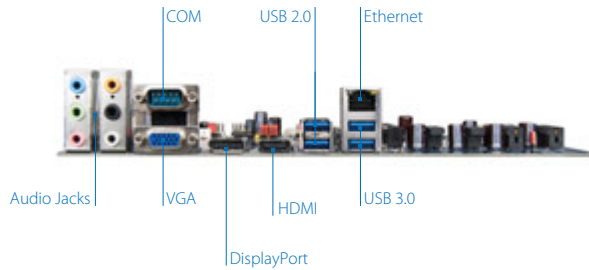

## Carrier Board (COMEDB2)



\* The carrier board is only for evaluation purposes.


## Specifications

<b>Model Name</b>	<b>COMEDB2</b>
<b>Audio</b>	VIA VT2021 High Definition Audio Codec
<b>Super I/O</b>	VIA VT1211 LPC super I/O
<b>Onboard I/O</b>	<ul style="list-style-type: none"> <li>2 SATA connectors</li> <li>2 USB 2.0 pin headers for 4 ports</li> <li>1 Single-channel 18/24-bit LVDS panel connector</li> <li>1 COM port pin header (powered by selectable 5V/12V)</li> <li>1 LPC pin header</li> <li>1 SMBus pin header</li> <li>1 SPI connector</li> <li>1 Digital I/O (4 GPI +4 GPO) pin header</li> <li>1 Front Audio pin header for Line-out, Mic-in</li> <li>2 Smart Fan connectors for CPU and system</li> <li>1 I<sup>2</sup>C pin header</li> <li>1 FIR pin header</li> <li>2 BIOS type select pin headers for select LPC/SPI BIOS</li> <li>2 BIOS select pin headers for select module/carrier board BIOS</li> <li>1 ATX power connector and 1 AUX power connector</li> <li>1 PCIe x16 (supports 4-lane) slot for PEG</li> <li>2 PCIe x1</li> <li>1 miniPCIe socket</li> <li>1 Reversed PCIe x4 slot for DVP</li> <li>1 Reserved PCIe x4 slot for VCP</li> <li>1 Reset Switch</li> <li>1 Power Button</li> </ul>
<b>Front Panel I/O</b>	1 SD card slot
<b>Rear Panel I/O</b>	<ul style="list-style-type: none"> <li>4 USB 3.0 ports</li> <li>1 HDMI port</li> <li>1 DisplayPort port</li> <li>1 VGA port</li> <li>1 COM port</li> <li>1 Gigabit Ethernet port</li> <li>6 Audio jacks (supports multi-channel audio outputs)</li> </ul>
<b>Power Supply</b>	ATX power connector
<b>Operating Temperature</b>	0 °C ~ 60°C
<b>Operating Humidity</b>	0% ~ 95% (non-condensing)
<b>Form Factor</b>	Micro-ATX (24.4cm x 24.4cm, 9.6" x 9.6")
<b>COM Express Module Type</b>	Supports basic/compact form factor type 6

## Ordering Information

Model Name	CPU Frequency	Description
COMe-8X92	VIA Nano® X2 E-Series @ 1.2GHz	COM Express Module with 1.2GHz VIA Nano® X2 E-Series CPU with HDMI, DisplayPort, VGA, LVDS, 4 USB 3.0, 4 USB 2.0, Gigabit Ethernet, 2 SATA, 2 PCIe, ATX power connector
COMEDB2	N/A	COMe-8X92 evaluation carrier board
99G42-01376A	N/A	Fansink for COMe-8X92
99G42-013886	N/A	Heat spreader for COMe-8X92
STK-C8X92-00A0	VIA Nano® X2 E-Series @ 1.2GHz	COMe-8X92 starter kit
STK-C8X92-01A0	VIA Nano® X2 E-Series @ 1.2GHz	COMe-8X92 starter kit with panel

## Block Diagram

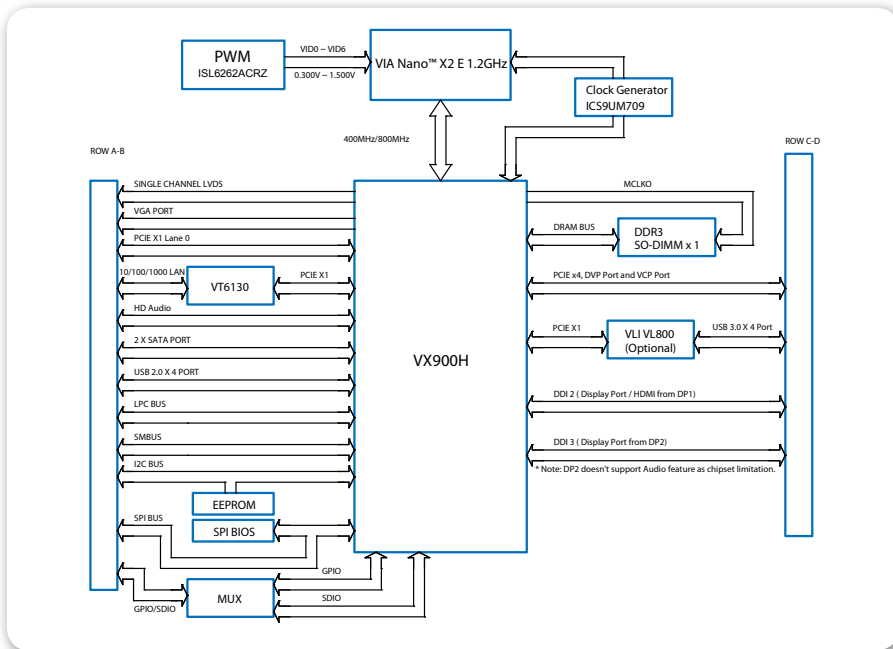

## Packing List (Starter Kit)

### Items for STK-C8X92-00A0

- COMe-8X92 COM Express module
- COMEDB2 COM Express carrier board
- SATA cable
- Dual-Port USB 2.0 cable
- COM cable
- LPT cable
- Quick guide

### Items for STK-C8X92-01A0

- COMe-8X92 COM Express module
- COMEDB2 COM Express carrier board
- SATA cable
- Dual-Port USB 2.0 cable
- COM cable
- LPT cable
- Quick guide
- LVDS cable
- Inverter cable
- 12.1" LCM

## COM Express Modules

### VIA COMe-8X91


COM Express Module with  
Type 10 pin-outs and Mini  
Form Factor

#### Features

- 800MHz VIA Eden® X2 processor
- Onboard 1GB DDR3 1066 SDRAM
- Display interface for 18/24-bit single-channel LVDS panel, and either one DisplayPort or one HDMI port
- Features three 1-lane PCIe expansion, two SATA and one Gigabit Ethernet
- Supports eight USB 2.0 ports

#### Board Placement

VIA Eden® X2 CPU

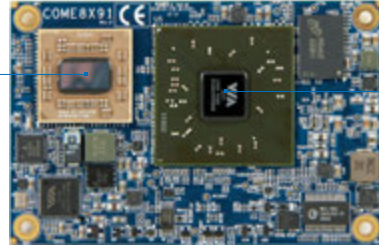

VIA VX900 Chipset

#### Specifications

COMe-8X91	
<b>Processor</b>	800MHz VIA Eden® X2
<b>Chipset</b>	VIA VX900 Media System Processor
<b>BIOS</b>	AMI BIOS, 4/8Mbit Flash memory
<b>System Memory</b>	Onboard 1GB DDR3 1066 SDRAM
<b>Storage</b>	2 SATA
<b>Graphics</b>	Integrated VIA Chrome®9 HD DX9 3D/2D graphics with MPEG-2, WMV9, VC1 and H.264 video decoding acceleration
<b>LAN</b>	VIA VT6130 Gigabit Ethernet controller
<b>Audio</b>	1 HD audio digital interface
<b>Super I/O</b>	VIA VT1211 LPC super I/O
<b>Supported Expansion I/O</b>	3 PCIe x1
<b>Supported I/O</b>	8 USB 2.0 1 HDMI port or 1 DisplayPort (without HDCP support) 1 Single-channel 18/24-bit LVDS panel 2 COM (TX/RX) 1 Gigabit Ethernet 1 LPC 1 SMBus 1 SPI 1 SDIO/GPIO 1 I <sup>2</sup> C bus
<b>Operating System</b>	Windows 7, WES 7, Windows CE, Linux
<b>System Monitoring &amp; Management</b>	CPU temperature reading, CPU fan speed reading, System voltage monitoring, Watch Dog Timer, Wake-on-LAN, System power management, AC power failure recovery
<b>Operating Temperature</b>	0°C ~ 50°C
<b>Operating Humidity</b>	0% ~ 95% (non-condensing)
<b>Form Factor</b>	8.4cm x 5.5cm (3.3" x 2.16")
<b>Compliance</b>	COM Express® type 10, Mini module

VIA Embedded  
ARM Boards


VIA Embedded  
ARM Systems

VIA Embedded  
x86 Boards

VIA Embedded  
x86 Systems

VIA Embedded  
Accessories

## Carrier Board Back Panel I/O

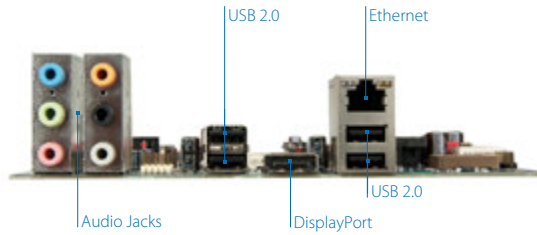

## Carrier Board (COMEDB3)



\* The carrier board is only for evaluation purposes.


## Specifications

<b>Model Name</b>	<b>COMEDB3</b>
<b>Audio</b>	VIA VT2021 High Definition Audio Codec
<b>Super I/O</b>	VIA VT1211 LPC super I/O
<b>Onboard I/O</b>	<ul style="list-style-type: none"> <li>2 SATA connectors</li> <li>2 USB 2.0 pin headers for 4 ports</li> <li>1 Single-channel 18/24-bit LVDS panel connector</li> <li>2 COM port pin headers (powered by selectable 5V/12V)</li> <li>1 LPT pin header</li> <li>1 LPC pin header</li> <li>1 SMBus pin header</li> <li>1 SPI connector</li> <li>1 SDIO and 1 Digital I/O (4 GPI +4 GPO) pin header</li> <li>1 Front audio pin header for Line-out, Mic-in</li> <li>2 Smart Fan connectors for CPU and system</li> <li>1 I<sup>2</sup>C pin header</li> <li>1 FIR pin header</li> <li>2 BIOS type select pin headers for select LPC/SPI BIOS</li> <li>2 BIOS select pin headers for select module/carrier board BIOS</li> <li>1 ATX power connector and 1 AUX power connector</li> <li>1 PCIe x1</li> <li>2 MiniPCIe</li> <li>1 Reset Switch</li> <li>1 Power Button</li> </ul>
<b>Rear Panel I/O</b>	<ul style="list-style-type: none"> <li>4 USB 2.0 ports</li> <li>1 DisplayPort port</li> <li>1 Gigabit Ethernet port</li> <li>6 Audio jack (supports multi-channel audio outputs)</li> </ul>
<b>Power Supply</b>	ATX power connector
<b>Operating Temperature</b>	0 °C ~ 50°C
<b>Operating Humidity</b>	0% ~ 95% (non-condensing)
<b>Form Factor</b>	Mini-ITX (17cm x 17cm, 6.7" x 6.7")
<b>COM Express Module Type</b>	Supports type 10, ultra module

## Ordering Information

Model Name	CPU Frequency	Description
COMe-8X91	VIA Eden® X2 @ 800MHz	COM Express Module with 800MHz VIA Eden® X2 CPU, 1GB DDR3 RAM with DisplayPort or HDMI, LVDS, 8 USB 2.0, Gigabit Ethernet, 2 SATA, 3 PCIe, ATX power connector
COMEDB3	N/A	COMe-8X91 evaluation carrier board
99G42-013516	N/A	Fansink for COMe-8X91
99G42-013896	N/A	Heat spreader for COMe-8X91
STK-C8X91-00A0	VIA Eden® X2 @ 800MHz	COMe-8X91 starter kit
STK-C8X91-01A0	VIA Eden® X2 @ 800MHz	COMe-8X91 starter kit with panel

## Block Diagram

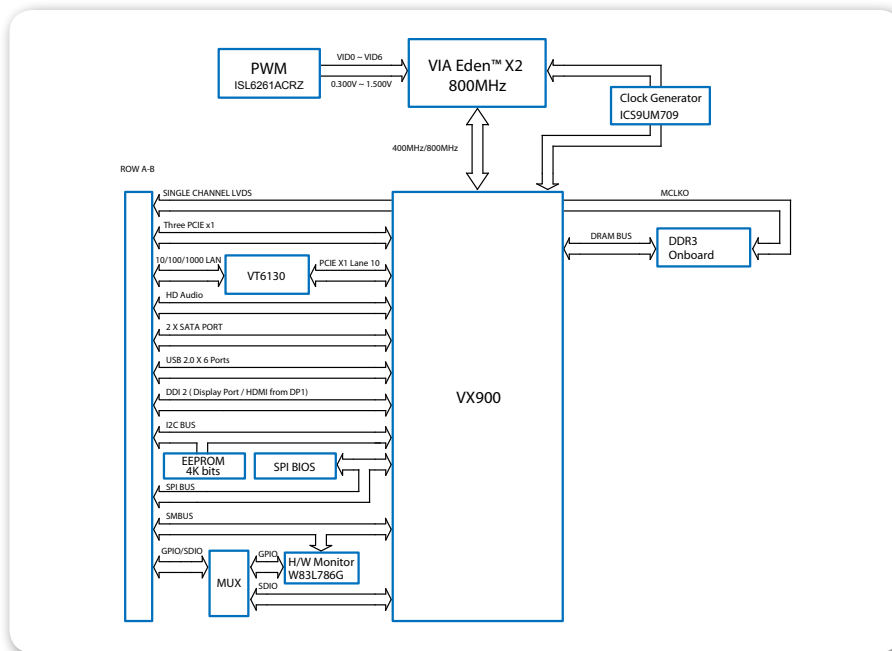

## Packing List (Starter Kit)

### Items for STK-C8X91-00A0

- COMe-8X91 COM Express module board
- COMEDB3 COM Express carrier board
- SATA cable
- Dual-port USB 2.0 cable
- COM cable
- LPT cable
- Quick guide

### Items for STK-C8X91-01A0

- COMe-8X91 COM Express module board
- COMEDB3 COM Express carrier board
- SATA cable
- Dual-port USB 2.0 cable
- COM cable
- LPT cable
- Quick guide
- LVDS cable
- Inverter cable
- 12.1" LCM



## COM Express Modules


### VIA COMe-8X90

COM Express Module with  
Type 6 pin-outs and Basic  
Form Factor

### Features

- 1.2GHz VIA Nano™ X2 E-Series processor
- Supports up to 8GB 1066 DDR3 SDRAM
- DX9 graphics with MPEG-2/WMV9/VC1/H.264 decoding acceleration
- Display interface for VGA, 18/24-bit single-channel LVDS panel, one DisplayPort, and one HDMI port
- Supports four USB 3.0 and four USB 2.0 ports


### Board Placement

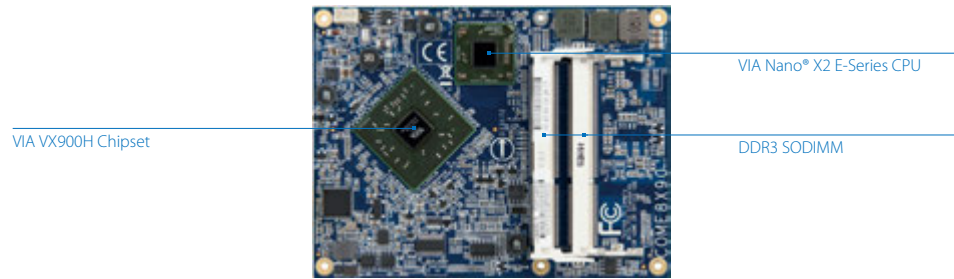

### Specifications

COMe-8X90	
<b>Processor</b>	1.2GHz VIA Nano® X2 E-Series
<b>Chipset</b>	VIA VX900H Media System Processor
<b>BIOS</b>	AMI BIOS, 4/8Mbit Flash memory
<b>System Memory</b>	2 DDR3 1066 SODIMM slots Up to 4GB memory size per slot
<b>Storage</b>	2 SATA
<b>Graphics</b>	Integrated VIA Chrome®9 HD DX9 3D/2D graphics with MPEG-2, WMV9, VC1 and H.264 video decoding acceleration
<b>LAN</b>	VIA VT6130 Gigabit Ethernet controller or Realtek RTL8111G PCIe Gigabit Ethernet controller
<b>Audio</b>	1 HD audio digital interface
<b>Supported Expansion I/O</b>	1 PCIe x4 1 PCIe x1
<b>Supported I/O</b>	4 USB 3.0 4 USB 2.0 1 HDMI 1 DisplayPort 1 VGA 1 Single-channel 18/24-bit LVDS panel 2 COM (TX/RX) 1 Gigabit Ethernet 1 Digital video output for external HDMI/LVDS/DVI transmitter or TV encoder 1 LPC 1 SMBus 1 SPI 1 SDIO/GPIO 1 I <sup>2</sup> C
<b>Operating System</b>	Windows 7, WES 7, Windows CE, Linux
<b>System Monitoring &amp; Management</b>	CPU temperature reading, CPU fan speed reading, System voltage monitoring, Watch Dog Timer, Wake-on-LAN, System power management, AC power failure recovery
<b>Operating Temperature</b>	0°C ~ 60°C
<b>Operating Humidity</b>	0% ~ 95% (relative humidity; non-condensing)
<b>Form Factor</b>	12.5cm x 9.5cm (4.92" x 3.73")
<b>Compliance</b>	COM Express® type 6, basic module

## Carrier Board Back Panel I/O

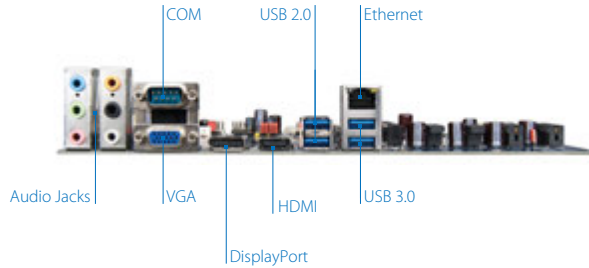

## Carrier Board (COMEDB2)



\* The carrier board is only for evaluation purposes.


## Specifications

<b>Model Name</b>	<b>COMEDB2</b>
<b>Audio</b>	VIA VT2021 High Definition Audio Codec
<b>Super I/O</b>	VIA VT1211 LPC super I/O
<b>Onboard I/O</b>	<ul style="list-style-type: none"> <li>2 SATA connectors</li> <li>2 USB 2.0 pin headers for 4 ports</li> <li>1 Single-channel 18/24-bit LVDS panel connector</li> <li>1 COM port pin header (powered by selectable 5V/12V)</li> <li>1 LPT pin header</li> <li>1 LPC pin header</li> <li>1 SMBus pin header</li> <li>1 S/PDIF-out connector</li> <li>1 Digital I/O (4 GPI + 4 GPO) pin header</li> <li>1 Front Audio pin header for Line-out, Mic-in</li> <li>2 Smart Fan connectors for CPU fan and system</li> <li>1 I<sup>2</sup>C pin header</li> <li>1 FIR pin header</li> <li>2 BIOS type select pin headers for select LPC/SPI BIOS</li> <li>2 BIOS select pin headers for select module/carrier board BIOS</li> <li>1 ATX power connector and 1 AUX power connector</li> <li>1 PCIe x16 (supports 4-lane) slot for PEG</li> <li>2 PCIe x1</li> <li>1 MiniPCIe slot</li> <li>1 Reversed PCIe x4 slot for DVP</li> <li>1 Reserved PCIe x4 slot for VCP</li> <li>1 Reset switch</li> <li>1 Power button</li> </ul>
<b>Front Panel I/O</b>	1 SD card slot
<b>Rear Panel I/O</b>	<ul style="list-style-type: none"> <li>4 USB 3.0 ports</li> <li>1 HDMI port</li> <li>1 DisplayPort</li> <li>1 VGA port</li> <li>1 COM port</li> <li>1 Gigabit Ethernet port</li> <li>6 Audio jacks (supports multi-channel audio outputs)</li> </ul>
<b>Power Supply</b>	ATX power connector
<b>Operating Temperature</b>	0 °C ~ 60°C
<b>Operating Humidity</b>	0% ~ 95% relative humidity
<b>Form Factor</b>	Micro-ATX (24.4cm x 24.4cm, 9.6" x 9.6")
<b>COM Express Module Type</b>	Supports COM Express™ type 6

## Ordering Information

Model Name	CPU Frequency	Description
COMe-8X90	VIA Nano® X2 E-Series @ 1.2GHz	COM Express module with 1.2GHz VIA Nano® X2 E-Series CPU with HDMI, DisplayPort, VGA, LVDS, 4 USB 3.0, 4 USB 2.0, Gigabit Ethernet, 2 SATA, 2 PCIe, ATX power connector
COMEDB2	N/A	COMe-8X90 evaluation carrier board
99G42-013056	N/A	Fansink for COMe-8X90
99G42-013876	N/A	Heat spreader for COMe-8X90
STK-C8X90-00A0	VIA Nano® X2 E-Series @ 1.2GHz	COMe-8X90 starter kit
STK-C8X90-01A0	VIA Nano® X2 E-Series @ 1.2GHz	COMe-8X90 starter kit with Panel

## Block Diagram

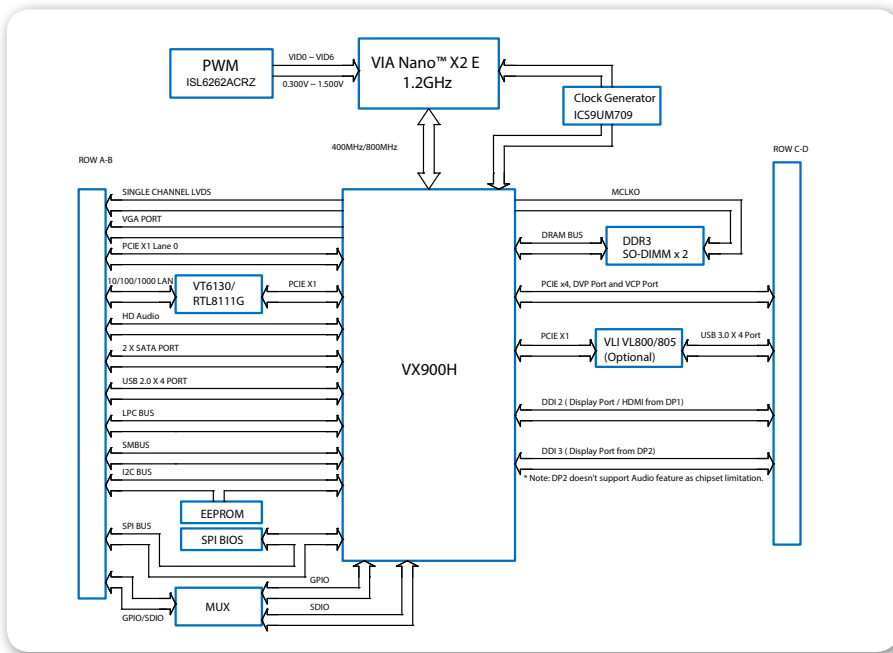

## Packing List (Starter Kit)

- Items for STK-C8X90-00A0**
- COMe-8X90 COM Express module board
  - COMEDB2 COM Express carrier board
  - SATA cable
  - Dual-port USB 2.0 cable
  - COM cable
  - LPT cable
  - Quick guide

- Items for STK-C8X90-01A0**
- COMe-8X90 COM Express module board
  - COMEDB2 COM Express carrier board
  - SATA cable
  - Dual-port USB 2.0 cable
  - COM cable
  - LPT cable
  - Quick guide
  - LVDS cable
  - Inverter cable
  - 12.1" LCM

## ETX Modules

VIA

# ETX-8X90


ETX® Module with high-performance multimedia capabilities

## Features

- 1.2GHz VIA Nano® X2 E-Series processor
- Supports up to 4GB 1066 DDR3 SDRAM
- DX9 graphics with MPEG-2/WMV9/VC1/H.264 decoding acceleration
- Display interface for VGA, supporting resolutions of up to 2048 x 1536, and one 18/24-bit dual-channel LVDS panel
- Supports four USB 2.0 and two mini USB ports

## Board Placement

VIA VX900 Chipset



VIA Nano® X2 E-Series CPU

DDR3 SODIMM

## Specifications

	ETX-8X90
<b>Processor</b>	1.2GHz VIA Nano® X2 E-Series
<b>Chipset</b>	VIA VX900 Media System Processor
<b>BIOS</b>	AMI BIOS, 8Mbit Flash memory
<b>System Memory</b>	1 DDR3 1066 SODIMM slot Up to 4GB memory size
<b>Storage</b>	Up to 2 SATA or 2 EIDE (master mode only)
<b>Graphics</b>	Integrated VIA Chrome®9 HD DX9 3D/2D graphics with MPEG-2, WMV9, VC1 and H.264 video decoding acceleration
<b>LAN</b>	Realtek RTL8139DL 10/100M Ethernet controller
<b>Audio</b>	1 HD audio digital interface
<b>Super I/O</b>	Fintek F71869ED
<b>Supported Expansion I/O</b>	2 PCI
<b>Left Panel I/O</b>	2 SATA connectors (1 optional) 2 Mini USB 2.0 1 Micro SD card slot 1 Audio pin header for Line-in, Line-out, Mic-in
<b>Supported I/O</b>	4 USB 2.0 ports 1 VGA 1 Dual-channel 18-bit/24-bit LVDS panel 2 COM 1 10/100M Ethernet 2 IDE (master mode only) 1 SMBus 1 I <sup>2</sup> C 1 ISA (not support DMA transfer)
<b>Operating System</b>	Windows 7, WES 7, Windows CE, Linux
<b>System Monitoring &amp; Management</b>	CPU temperature reading, CPU fan speed reading, System voltage monitoring, Watch Dog Timer, Wake-on-LAN, System power management, AC power failure recovery
<b>Operating Temperature</b>	0°C ~ 60°C
<b>Operating Humidity</b>	0% ~ 95% (non-condensing)
<b>Form Factor</b>	114 mm x 95 mm (4.45" x 3.7")
<b>Compliance</b>	ETX 3.02, compact module

VIA Embedded  
ARM Boards


VIA Embedded  
ARM Systems

VIA Embedded  
x86 Boards

VIA Embedded  
x86 Systems

VIA Embedded  
Accessories

## Carrier Board Back Panel I/O

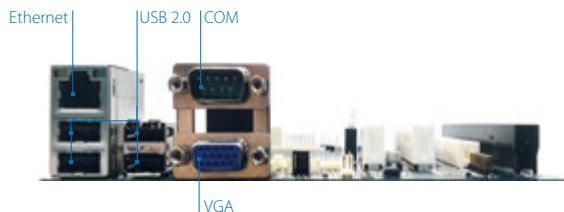

## Carrier Board (ETXDB1)



\* The carrier board is only for evaluation purpose.


## Specifications

<b>Model Name</b>	<b>ETXDB1</b>
<b>Super I/O</b>	Fintek F71869ED
<b>Onboard I/O</b>	1 ISA connector (compatible with ISA ETX 3.0) 2 EIDE connectors (master mode only) 1 COM port pin headers 1 LPT connector 1 Dual-channel 18/24-bit LVDS panel connector 1 Audio pin header for Line-out, Mic-in 1 SMBus pin header 1 I <sup>2</sup> C pin header 1 Backlight voltage selects pin header 1 SIR pin header 1 RTC external battery holder 1 ATX power connector 2 PCI slots (compatible with PCI 2.3, 32bit/33Mhz)
<b>Rear Panel I/O</b>	4 USB 2.0 ports 1 VGA port 1 COM port 1 10/100Mbps Ethernet connector
<b>Power Supply</b>	ATX power connector
<b>Operating Temperature</b>	0°C ~ 60°C
<b>Operating Humidity</b>	0% ~ 95% (non-condensing)
<b>Form Factor</b>	Mini-ITX (17cm x 17cm, 6.7" x 6.7")

## Ordering Information

Model Name	CPU Frequency	Description
ETX-8X90	1.2GHz VIA Nano® X2 E-Series	ETX Board with 1.2GHz VIA Nano® X2 E-Series CPU with VGA, LVDS, 4 USB 2.0, 2 Mini USB 2.0, COM, 10/100Mbps Ethernet, SATA, 2 IDE, 2 PCI, Micro SD card slot, ATX power connector
ETXDB1	N/A	ETX-8X90 evaluation carrier board
99G42-01381Q	N/A	Heatsink with fan for ETX-8X90
99G42-01413Q	N/A	Heat spreader for ETX-8X90
STK-E8X90-00A0	1.2GHz VIA Nano® X2 E-Series	ETX-8X90 starter kit
STK-E8X90-01A0	1.2GHz VIA Nano® X2 E-Series	ETX-8X90 starter kit with Panel

## Block Diagram

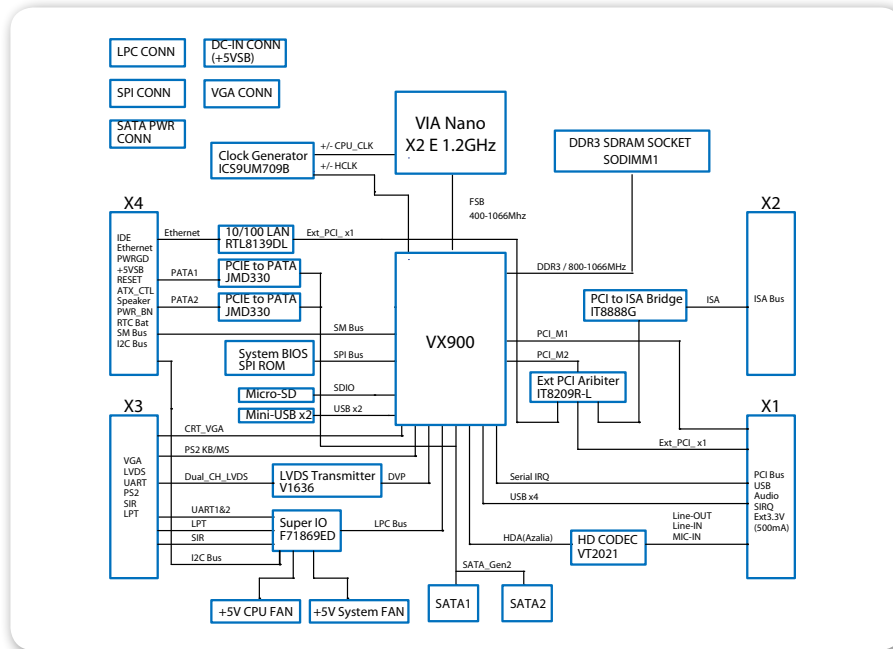

## Packing List (Starter Kit)

### Items for STK-E8X90-00A0

- ETX-8X90 ETX module board
- ETXDB1 ETX carrier board
- SATA cable
- PATA cable
- KB/MS cable
- COM cable
- LPT cable

### Items for STK-E8X90-01A0

- ETX-8X90 ETX module board
- ETXDB1 ETX carrier board
- SATA cable
- PATA cable
- KB/MS cable
- COM cable
- LPT cable
- LVDS cable
- Inverter cable
- 12.1" LCM



# VIA Embedded x86 Systems

- AMOS-3005
- AMOS-3003
- AMOS-3002
- ARTiGO A1300
- ARTiGO A1250
- VIPRO VP7910

# Quick Guide

Model	Industrial		
	AMOS-3005 <b>NEW</b>	AMOS-3003	AMOS-3002
Processor	1.2GHz VIA Eden® X4	1.2GHz VIA Nano® X2 E-Series	1.0GHz VIA Eden® X2
Chipset	VIA VX11 MSP	VIA VX11H MSP	VIA VX900H MSP
Graphics	Integrated VIA Chrome® 640 DX11 3D/2D graphics with MPEG2, WMV9, VC1 and H.264 video decoding acceleration	Integrated VIA Chrome® 640 DX11 3D/2D graphics with MPEG2, WMV9, VC1 and H.264 video decoding acceleration	Integrated VIA Chrome®9 HD DX9 3D/2D graphics with MPEG-2, WMV9, VC1 and H.264 video decoding acceleration
System Memory	1 DDR3 1333 SDRAM (SODIMM) (Max. 8GB)	1 DDR3 1333 SDRAM (SODIMM) (Max. 8GB)	1 DDR3 1066 SDRAM (SODIMM) (Max. 4GB)
Storage	1 mSATA slot	Supports 1 2.5" SATA 2.5" HDD/SSD 1 mSATA slot	Supports 1 CFast Flash drive Supports 1 2.5" SATA HDD/SSD (Hard drive bay optional)
Audio	HD	HD	HD
Display I/O	1 HDMI 1 VGA	1 Mini HDMI 1 VGA	1 HDMI 1 VGA
USB	2 USB 3.0 2 USB 2.0	2 USB 3.0 2 USB 2.0	6 USB 2.0
LAN	2 Gigabit Ethernet	2 Gigabit Ethernet	2 Gigabit Ethernet
COM	2	3	2
Digital I/O	1	1	1
Expansion I/O	1 miniPCIe 1 SIM slot	2 miniPCIe	1 miniPCIe
Power Supply	9V ~ 36V DC-in	9V ~ 30V DC-in	12V DC-in
Operating System	Windows 8.1/8/7, WES 7, Linux	Windows 7, WES 7, Linux	Windows 7, WES 7, Linux
Operating Temperature	0°C ~ 60°C (with qualified industrial grade mSATA)	-10°C ~ 60°C (SSD); 0°C ~ 45°C (HDD)	-20°C ~ 60°C
Optional Accessories	EMIO-1533 USB Wi-Fi EMIO-2550 3G	EMIO-1533 USB Wi-Fi EMIO-2550 3G	EMIO-2550 3G

VIA Embedded  
ARM BoardsVIA Embedded  
ARM SystemsVIA Embedded  
x86 BoardsVIA Embedded  
x86 SystemsVIA Embedded  
Accessories

# Quick Guide

	Panel PC		Smart Clients	
Model	VIPRO VP7910 <b>NEW</b>	ARTiGO A1300	ARTiGO A1250 <b>NEW</b>	
Processor	1.2GHz VIA Eden® X4	VIA QuadCore E-Series	1.2GHz VIA Eden® X4	
Chipset	VIA VX11H MSP	VIA VX11PH MSP	VIA VX11H MSP	
Graphics	Integrated VIA Chrome® 640 DX11 3D/2D graphics with MPEG2, WMV9, VC1 and H.264 video decoding acceleration	Integrated VIA Chrome® 640 DX11 3D/2D graphics with MPEG2, WMV9, VC1 and H.264 video decoding acceleration	Integrated VIA Chrome® 640 DX11 3D/2D graphics with MPEG2, WMV9, VC1 and H.264 video decoding acceleration	
System Memory	Built-in 2GB DDR3 1333SDRAM (SODIMM) (Max. 8GB)	1 DDR3 1066/1333 SODIMM socket (Max. 8GB)	1 DDR3 1066/1333 SODIMM socket (Max. 8GB)	
Storage	Supports 1 2.5" SATA 2.5" HDD/SSD 1 mSATA slot	Supports 1 2.5" SATA HDD/SSD 1 mSATA slot	Supports 1 2.5" SATA HDD/SSD	
Audio	HD	HD	HD	
Display I/O	1 Mini HDMI 1 VGA	2 HDMI	1 Mini HDMI 1 VGA	
USB	2 USB 3.0 2 USB 2.0	2 USB 3.0 2 USB 2.0	2 USB 3.0 2 USB 2.0	
LAN	2 Gigabit Ethernet	1 Gigabit Ethernet	1 Gigabit Ethernet	
COM	3	1	N/A	
Digital I/O	1	1	N/A	
Expansion I/O	2 miniPCIe	1 miniPCIe slot 1 SIM card slot	N/A	
Power Supply	9V ~ 32V DC-in	12V DC-in	12V DC-in	
Operating System	Windows 8/7, WES 7, Linux,	Windows 8/7, WES 7, Linux	Windows 8/7, WES 7, Linux	
Operating Temperature	-10°C ~ 50°C	0°C ~ 45°C	0°C ~ 40°C	
Optional Accessories	EMIO-2550 3G	EMIO-1533 USB Wi-Fi EMIO-2550 3G	EMIO-1533 USB Wi-Fi	

VIA  
**AMOS-3005**

Ultra-compact fanless system for embedded industrial applications ideally suited for demanding environments




**Features**

- Ultra compact, ruggedized form factor with multiple wall/DIN Rail/VESA mounting solutions
- High-performance fanless 1.2GHz VIA Eden® X4 processor
- DX11 graphics with MPEG-2/WMV9/VC1/H.264 decoding acceleration
- Rich I/O feature set including lockable USB, RS-232/422/485, and GPIO
- Support for dual independent VGA + HDMI displays


**Specifications**

<b>Model Name</b>	<b>AMOS-3005</b>
<b>Processor</b>	1.2GHz VIA Eden® X4
<b>Chipset</b>	VIA VX11 Media System Processor
<b>BIOS</b>	AMI BIOS, 32Mbit Flash memory
<b>System Power Management</b>	Wake-on LAN, keyboard power-on, timer power-on, system power management, AC power failure recovery, Watch Dog timer control
<b>System Memory</b>	1 DDR3 1333 SDRAM SODIMM socket Up to 8GB memory size
<b>Storage</b>	Supports 1 mSATA slot
<b>Graphics</b>	Integrated Chrome® 640 DX11 3D/2D graphics with MPEG-2, WMV9, VC1 and H.264 video decoding accelerator
<b>Audio</b>	VIA VT2021 High Definition Audio Codec
<b>Display I/O</b>	1 HDMI port 1 VGA port supporting VGA resolutions up to 2048 x 1536 pixels Dual independent VGA + HDMI display at different resolutions, pixel depths, and refresh rates
<b>USB</b>	2 USB 3.0 ports, 2 USB 2.0 ports (lockable USB ports for secure connections)
<b>LAN</b>	2 Realtek RTL8111G PCIe Gigabit Ethernet controllers
<b>COM</b>	Fintek F71869ED
<b>Expansion I/O</b>	1 miniPCIe slot 1SIM slot
<b>Front Panel I/O</b>	2 Lockable USB 2.0 ports 2 COM ports for RS-232/422/485 1 Power on/off button 1 Red LED for HDD activity 1 Green LED for power status
<b>Back Panel I/O</b>	2 USB 3.0 ports 1 HDMI port 1 VGA port 2 Gigabit Ethernet ports 1 DIO port for 8-bit GPIO 2 Audio jacks: Line-out and Mic-in 1 2-pole Phoenix DC jack
<b>Power Supply</b>	9 ~ 36V DC-in (typical: 23W-TBC)
<b>Operating System</b>	Windows 8.1/8/7, WES 7, Linux
<b>Watch Dog Timer</b>	System reset; programmable 1-255 sec
<b>Mechanical Construction</b>	Aluminum top chassis housing Metal chassis housing Dual removable front & rear metal face plate
<b>Mounting</b>	Wall/DIN Rail/VESA mountable

## Front System IO



## Rear System IO



## Specifications

<b>Model Name</b>	<b>AMOS-3005</b>
<b>Dimensions</b>	150.5mm(W) x 48.1mm(H) x 109.8mm(D) (5.93" x 1.89" x 4.32")
<b>Weight</b>	1.4kg (3.08lbs)
<b>Operating Temperature</b>	0°C ~ 60°C with qualified industrial grade mSATA
<b>Storage Temperature</b>	-20°C ~ 70°C
<b>Operating Humidity</b>	0% ~ 95% (relative humidity; non-condensing)
<b>Vibration Loading During Operation</b>	With mSATA Flash Drive: 5Grms, IEC 60068-2-64, random, 5 ~ 500Hz, 1 Oct./min, 1hr/axis
<b>Shock During Operation</b>	With mSATA Flash Drive: 50G, IEC 60068-2-27, half size, 11ms duration
<b>Compliance</b>	CE/FCC

## Ordering Information

Part Number	CPU Frequency	Description
AMOS-3005-1Q12A1	VIA Eden® X4 @ 1.2GHz	1.2GHz VIA Eden® X4 CPU based fanless embedded system with HDMI, VGA, 2 USB 3.0, 2 Lockable USB 2.0, 2 COM, DIO, 2 Gigabit Ethernet, 9 ~ 36V DC-in power

## Optional Accessories


### External AC-to-DC Adapter and Power Cord

Part Number	Description
99G63-020316	AC-to-DC adapter, 2-pole Phoenix connector, DC 12V/5A, 60W
99G33-02032C	Power cord, 180cm, USA type
99G33-02033C	Power cord, 180cm, Europe type
99G33-02034C	Power cord with PSE mark, 180cm for Japan market

### Wireless Accessories

Part Number	Description
EMIO-1533-00A2	VNT9271 IEEE 802.11 b/g/n USB Wi-Fi module with assembly kit
EMIO-2550-00A1	Ublox 3.75G HSPA/UMTS mobile broadband full size miniPCIe module with GPS and SIM card slot
EMIO-2550-01A1	Ublox 3.75G HSPA/UMTS mobile broadband full size miniPCIe module

## Dimensions

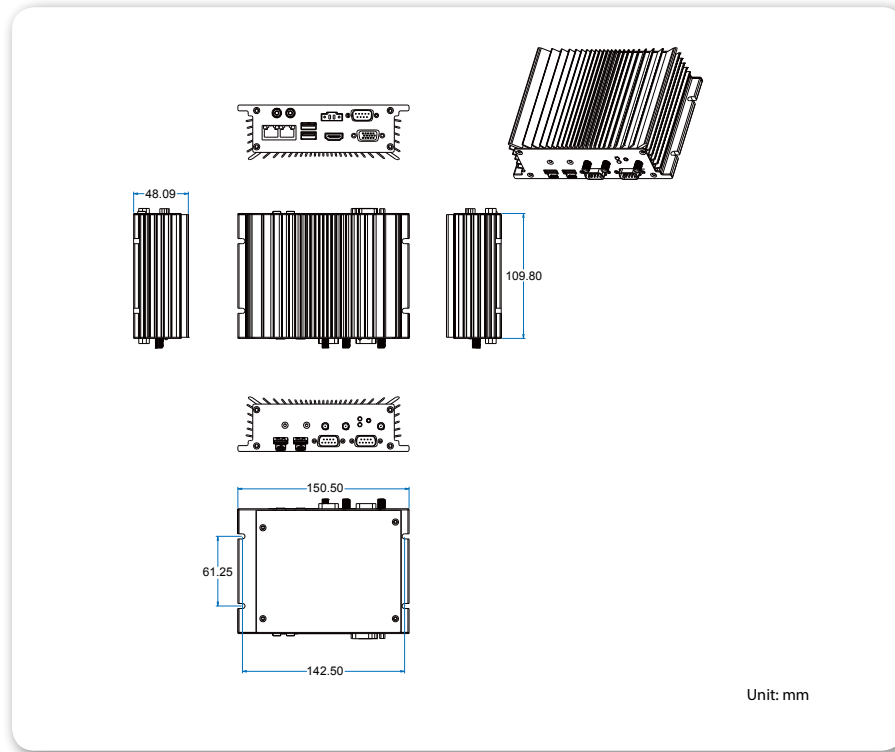

## Packing List

### Items

- AMOS-3005 system
- AC-to-DC adapter , 2-pole phoenix plug to DC jack
- Screw pack for mounting
- Screw pack for Mini PCI-e card
- Washer rubbers pack

## VIA AMOS-3003

Compact fanless embedded system ruggedized for extreme environments



### Features

- 1.2GHz VIA Nano® X2 E-Series dual-core processor
- Wide input voltage range supporting 9V~30V DC-in
- Dual Gigabit Ethernet, optional Wi-Fi and dual 3G SIM card support
- Legacy I/O support including COM and GPIO
- Support for dual independent VGA + HDMI displays


### Specifications

<b>Model Name</b>	<b>AMOS-3003</b>
<b>Processor</b>	1.2GHz VIA Nano® X2 E-Series CPU
<b>Chipset</b>	VIA VX11H Media System Processor
<b>BIOS</b>	AMI Aptio UEFI BIOS, 32Mbit Flash memory
<b>System Power Management</b>	ACPI 3.0 compliant, Wake-on LAN, keyboard power-on, timer power-on, system power management, AC power failure recovery, Watch Dog timer control
<b>System Memory</b>	1 DDR3 1333 SODIMM socket Up to 8GB memory size
<b>Storage</b>	Supports 1 2.5" SATA HDD/SSD 1 mSATA slot
<b>Graphics</b>	Integrated VIA Chrome® 640 DX11 3D/2D graphics with MPEG-2, WMV9, VC1 and H.264 video decoding acceleration
<b>Audio</b>	VIA VT2021 High Definition Audio Codec
<b>Display I/O</b>	1 Mini HDMI port 1 VGA port supporting VGA resolutions up to 2048 x 1536 pixels Dual independent VGA + HDMI display at different resolutions, pixel depths, and refresh rates
<b>USB</b>	2 USB 3.0 ports and 3 USB 2.0 host ports
<b>LAN</b>	VIA VT6130 PCIe Gigabit Ethernet controller Realtek RTL8111G PCIe Gigabit Ethernet controller Supports Wake On LAN (WOL) Supports Preboot Execution Environment (PXE) 11x5-pin header reserved to support VIA VNT9271 802.11n Wi-Fi USB module
<b>COM</b>	Fintek F81865
<b>Expansion I/O</b>	2 miniPCIe slots (supports 2 SIM slots) Supports optional Wi-Fi/3G modules Supports 3 external antenna for Wi-Fi, 3G module, and GPS module
<b>Back Panel I/O</b>	2 USB 3.0 ports 2 USB 2.0 ports 1 Mini HDMI port 1 VGA port 2 Gigabit Ethernet ports 3 Audio jacks: Line-out, Line-in and Mic-in 1 Power on/off button 1 Red LED for HDD activity 1 Green LED for power status 1 2-pole Phoenix DC jack
<b>Left Side I/O</b>	1 DIO port for 8-bit GPIO 3 COM ports for RS-232/422/485 (powered by selectable 5V/12V)
<b>Watch Dog Timer</b>	System reset; programmable 1-255 sec
<b>Power Supply</b>	9V ~ 30V DC-in (typical: 27W) Supports over voltage protection, over current protection, under voltage protection
<b>Operating System</b>	Windows 7, WES 7, Linux






## Rear Panel I/O

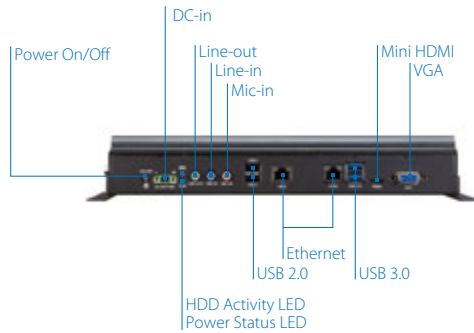

## Left Side I/O



## Specifications

<b>Model Name</b>	<b>AMOS-3003</b>
<b>Mechanical Construction</b>	Aluminum mixed with heavy-duty steel with heat pipe embedded Aluminum top cover mixed with copper heat-pipe
<b>Mounting</b>	Built-in wall mountable brackets on system chassis
<b>Dimensions</b>	311mm(W) x 50.6mm(H) x 185mm(D) (with wall mountable brackets)
<b>Weight</b>	3.5kg (7.7lbs)
<b>Operating Temperature</b>	-10°C ~ 60°C (SSD); 0°C ~ 45°C (HDD)
<b>Storage Temperature</b>	-20°C ~ 70°C
<b>Operating Humidity</b>	10% ~ 90% @ 45°C (non-condensing)
<b>Vibration Loading During Operation</b>	With mSATA or 2.5" SSD: 3Grms, IEC 60068-2-64, random, 5 ~ 500Hz, 1hr/axis
<b>Shock During Operation</b>	With mSATA or 2.5" SSD: 50G, IEC 60068-2-27, half size, 11 ms duration
<b>Compliance</b>	CE/FCC

## Ordering Information


Part Number	CPU Frequency	Description
AMOS-3003-1D12A1	VIA Nano X2 E-Series @ 1.2GHz	1.2GHz VIA Nano X2 E-Series CPU based fanless embedded system with Mini HDMI, VGA, 2 USB 3.0, 2 USB 2.0, 3 COM, DIO, 2 Gigabit Ethernet, SATA, mSATA, 9V ~ 30V DC-in

## Optional Accessories

External AC-to-DC Adapter and Power Cord	
Part Number	Description
99G63-020316	AC-to-DC Adapter, 2-pole, DC 12V/5A, 60W
99G33-02032C	Power Cord, 180cm, USA type
99G33-02034C	Power Cord with PSE mark, 180cm for Japan market
99G33-02033C	Power Cord, 180cm, Europe type

Wireless Modules	
Part Number	Description
EMIO-1533-00A2	VNT9271 IEEE 802.11b/g/n USB Wi-Fi module with assembly kit
EMIO-2550-00A1	Ublox 3.75G HSPA/UMTS mobile broadband full size miniPCIe module with GPS and SIM card slot
EMIO-2550-01A1	Ublox 3.75G HSPA/UMTS mobile broadband full size miniPCIe module

## Dimensions

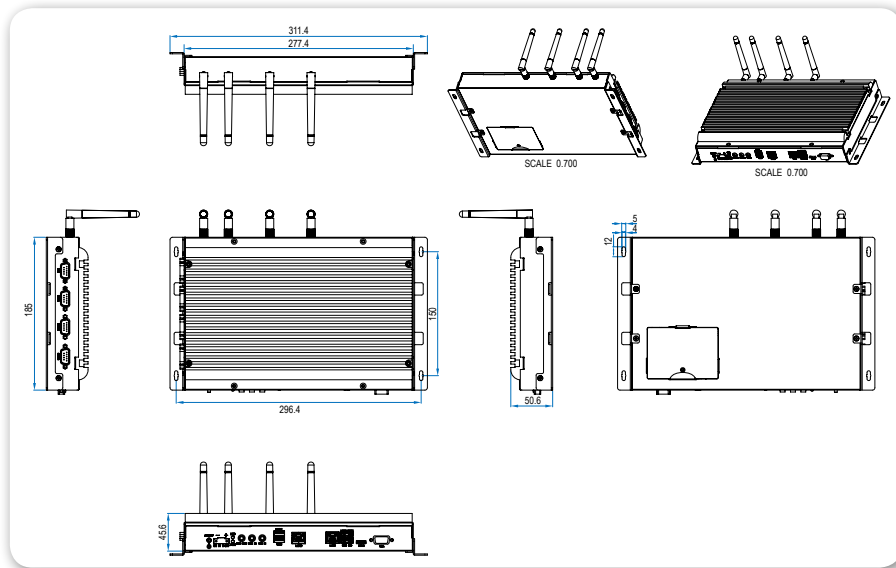

## Packing List

### Items

- AMOS-3003 system
- 4 x M4\*8mm screws with spring and flat washer for wall mounting (P/N:99G44-010395)
- 6 x M2\*5mm screws for mini card and mSATA module (P/N:99G44-010155)
- 4 x M3\*5mm screws for SSD/HDD (P/N:99G44-010645)
- 1 x Power cable, 2-pole Phoenix plug to DC-In (P/N:99G33-250043)
- 1 x Thermal pad for SSD/HDD (P/N:99H43-140762)
- 1 x Thermal pad for mSATA module (P/N:99H43-141016)

## VIA AMOS-3002

Ultra-compact fanless system for embedded industrial applications ideally suited for demanding environments

### Features

- Ultra compact, ruggedized form factor with multiple wall/table/VESA mounting solutions
- High-performance fanless 1.0GHz VIA Eden® X2 processor
- DX9 graphics with MPEG-2/WMV9/VC1/H.264 decoding acceleration
- Rich I/O feature set including lockable USB, RS-232/422/485, and GPIO
- Support for dual independent VGA + HDMI displays




### Specifications


<b>Model Name</b>	<b>AMOS-3002</b>
<b>Processor</b>	1.0GHz VIA Eden® X2
<b>Chipset</b>	VIA VX900H Media System Processor
<b>BIOS</b>	AMI BIOS, 8Mbit Flash memory
<b>System Power Management</b>	Wake-on LAN, keyboard power-on, timer power-on, system power management, AC power failure recovery, Watch Dog timer control
<b>System Memory</b>	1 DDR3 1066 SODIMM socket Up to 4GB memory size
<b>Storage</b>	Supports 1 CFast Flash drive Supports 1 2.5" SATA HDD/SSD (AMOS-3002-2D10A1)
<b>Graphics</b>	Integrated VIA Chrome®9 HD DX9 3D/2D graphics with MPEG-2, WMV9, VC1 and H.264 video decoding acceleration
<b>Audio</b>	VIA VT2021 High Definition Audio Codec
<b>Display I/O</b>	1 HDMI port 1 VGA port supporting VGA resolutions up to 1920 x 1200 pixels Dual independent VGA + HDMI display at different resolutions, pixel depths, and refresh rates
<b>USB</b>	6 USB 2.0 ports, including 2 lockable USB ports for secure connections
<b>LAN</b>	VIA VT6130 PCIe Gigabit Ethernet controller
<b>COM</b>	Integrated in VX900H
<b>Expansion I/O</b>	1 miniPCIe slot
<b>Front Panel I/O</b>	1 CFast Flash slot 2 USB 2.0 ports 2 COM ports for 1 RS-232 and 1 RS-232/422/485 1 DIO port for 8-bit GPIO 2 Lockable USB 2.0 ports 2 Audio jacks: Line-in and Mic-out 1 SIM card slot 1 Power on/off button 1 Red LED for HDD activity 1 Green LED for power status 1 2-pole Phoenix DC jack
<b>Back Panel I/O</b>	2 USB 2.0 ports 1 HDMI port 1 VGA port 2 Gigabit Ethernet ports
<b>Power Supply</b>	12V DC-in (typical: 23W)
<b>Operating System</b>	Windows 7, WES 7, Linux
<b>Watch Dog Timer</b>	System reset; programmable 1-255 sec
<b>Mechanical Construction</b>	Aluminum top chassis housing Metal chassis housing Dual removable front & rear metal face plate
<b>Mounting</b>	Wall/table/VESA mountable



### Front System IO



### Rear System IO



### Combination of AMOS-3002 and Sub-system Chassis



## Specifications

Model Name	AMOS-3002-1D10A1	AMOS-3002-2D10A1
Dimensions	197mm(W) x 49mm(H) x 104mm(D) (7.75" x 1.92" x 4.09")	197mm(W) x 66mm(H) x 104mm(D) (7.75" x 2.59" x 4.09")
Weight	1.4kg (3.08lbs)	1.8kg (4.02lbs)
Operating Temperature	-20°C ~ 60°C for 1.0GHz VIA Eden® X2 processor 0°C ~ 45°C when system equipped with 2.5" hard disk drive (AMOS-3002-2D10A1)	
Storage Temperature	-20°C ~ 70°C	
Operating Humidity	0% ~ 95% (relative humidity; non-condensing)	
Vibration Loading During Operation	With CFast Flash drive: 5Grms, IEC 60068-2-64, random, 5 ~ 500Hz, 1hr/axis	
Shock During Operation	With CFast Flash drive: 50G, IEC 60068-2-27, half size, 11ms duration	
Compliance	CE/FCC	

## Ordering Information

Part Number	CPU Frequency	Description
AMOS-3002-1D10A1	VIA Eden® X2 @ 1.0GHz	1.0GHz VIA Eden® X2 CPU based fanless embedded system with HDMI, VGA, 4 USB 2.0, 2 Lockable USB 2.0, 2 COM, DIO, 2 Gigabit Ethernet, CFast Flash slot, 12V DC-in power
AMOS-3002-2D10A1	VIA Eden® X2 @ 1.0GHz	1.0GHz VIA Eden® X2 CPU based fanless embedded system with HDMI, VGA, 4 USB 2.0, 2 Lockable USB, 2 COM, DIO, 2 Gigabit Ethernet, 2.5" SATA HDD/SSD Bay, CFast Flash slot, 12V DC-in power

## Optional Accessories


### External AC-to-DC Adapter and Power Cord

Part Number	Description
99G63-020316	AC-to-DC adapter, 2-pole Phoenix connector, DC 12V/5A, 60W
99G33-02032C	Power cord, 180cm, USA type
99G33-02033C	Power cord, 180cm, Europe type
99G33-02034C	Power cord with PSE mark, 180cm for Japan market

### Wireless Accessories

Part Number	Description
EMIO-2550-00A1	Ublox 3.75G HSPA/UMTS mobile broadband full size miniPCIe module with GPS and SIM card slot
EMIO-2550-01A1	Ublox 3.75G HSPA/UMTS mobile broadband full size miniPCIe module

## Dimensions

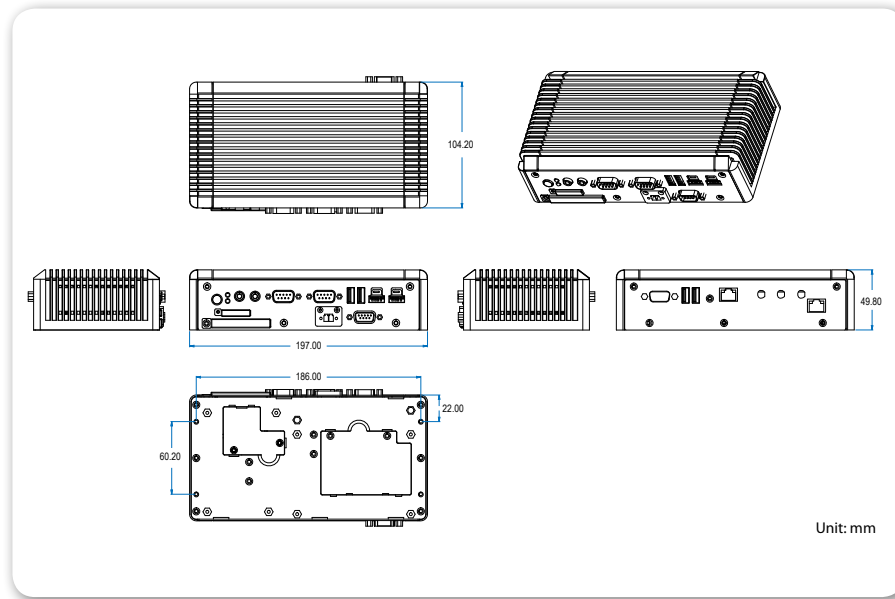

## Packing List

### Items

- AMOS-3002 system
- VESA bracket
- Wall mount bracket
- Power cable, 2-pole phoenix DC-in jack connector
- Thermal pad for memory
- Thermal pad for CFast
- Bottom washer rubber

## Video Wall Mini

NEW

# VIA ARTiGO A1300

Ultra-compact fanless system for mission-critical dual-display signage, HMI, and IoT applications



## Features

- Two HDMI ports with dual independent display support
- 1.0GHz VIA QuadCore E-Series processor and VX11PH media system processor
- Rich I/O features, including COM, Digital I/O, USB 2.0, and USB 3.0 ports
- Optional 3G and Wi-Fi modules
- VIA MagicView™ content management software available


## Specifications

<b>Model Name</b>	<b>ARTiGO A1300</b>
<b>Processor</b>	1.0GHz VIA QuadCore E-Series
<b>Chipset</b>	VIA VX11PH Media System Processor
<b>BIOS</b>	AMI Aptio UEFI BIOS, 32Mbit Flash memory
<b>System Power Management</b>	Timer Power-On ACPI 3.0 compliant
<b>System Memory</b>	1 DDR3 1066/1333 SODIMM socket Up to 8GB memory size
<b>Storage</b>	Supports 1 2.5" SATA SSD/HDD 1 mSATA slot
<b>Graphics</b>	Integrated Chrome® 645/640 DX11 3D/2D graphics with MPEG-2, WMV9, VC-1 and H.264 video decoding acceleration
<b>Audio</b>	VIA VT2021 High Definition Audio Codec
<b>Display I/O</b>	2 HDMI ports supporting resolutions up to 1920 x 1080 pixels Dual independent HDMI displays at different resolutions, pixel depths, and refresh rates
<b>USB</b>	2 USB 3.0 ports and 2 USB 2.0 ports
<b>LAN</b>	Realtek RTL8111G Gigabit Ethernet controller Supports Wake-On-LAN and Boot from LAN (PXE)
<b>COM</b>	Fintek F71869
<b>Expansion I/O</b>	1 miniPCIe slot (PCIe + USB 2.0) 1 SIM card slot
<b>Front Panel I/O</b>	2 USB 3.0 ports 2 HDMI ports 1 Gigabit Ethernet port 2 Audio jacks: Line-in and Line-out 1 Power on/off button 1 Red LED for SSD activity 1 Green LED for power status 1 2-pole Phoenix DC jack
<b>Left Panel I/O</b>	2 USB 2.0 ports 1 COM port for RS-232/422/485 (powered by selectable 5V/12V) 1 DIO port for 8-bit GPIO 1 Blue LED for 3G 1 Blue LED for USB Wi-Fi
<b>Rear Panel I/O (Optional)</b>	1 Antenna hole for 3G 1 Antenna hole for Wi-Fi
<b>Watch Dog Timer</b>	System reset; programmable 1~255 sec
<b>Power Supply</b>	12V DC-in (typical: 28W)
<b>Operating System</b>	Windows 7, WES 7, Linux





## Front Panel External I/O

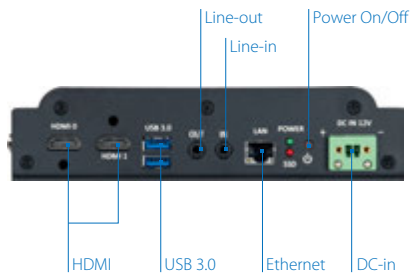

## Left Panel External I/O



## Specifications

<b>Model Name</b>	<b>ARTiGO A1300</b>
<b>Mechanical Construction</b>	Fanless Aluminum alloy
<b>Mounting</b>	VESA mount
<b>Dimensions</b>	185mm(W) x 44.4mm(H) x 162mm(D) (7.28" x 1.75" x 6.38")
<b>Weight</b>	2.0kg (4.4lbs) (without HDD)
<b>Operating Temperature</b>	0°C ~ 45°C (SSD & mSATA) 0°C ~ 40°C (HDD)
<b>Storage Temperature</b>	-10°C ~ 60°C
<b>Operating Humidity</b>	0% ~ 90% (non-condensing)
<b>Vibration Loading During Operation</b>	With 2.5" SSD IEC 60068-2-64 (5Grms, random, 5 ~ 500Hz, 1hr/axis)
<b>Shock During Operation</b>	With 2.5" SSD IEC 60068-2-27 (50G, half size, 11ms duration)
<b>Compliance</b>	CE/FCC

## Ordering Information


Part Number	CPU Frequency	Description
ATG-A1300-1Q10A2	VIA QuadCore E-Series @ 1.0GHz	Fanless embedded system with 1.0GHz VIA QuadCore E-Series CPU, 2 HDMI, 2 USB 3.0, 2 USB 2.0, COM, DIO, Gigabit Ethernet, SATA SSD bay, mSATA, 12V DC-in, power cord USA type
ATG-A1300-2Q10A2	VIA QuadCore E-Series @ 1.0GHz	Fanless embedded system with 1.0GHz VIA QuadCore E-Series CPU, 2 HDMI, 2 USB 3.0, 2 USB 2.0, COM, DIO, Gigabit Ethernet, SATA SSD bay, mSATA, 12V DC-in, power cord EU type

## Optional Accessories

### Wireless Accessories

Part Number	Description
EMIO-1533-00A2	VNT9271 IEEE 802.11b/g/n USB Wi-Fi module with assembly kit
EMIO-2550-01A1	Ublox 3.75G HSPA/UMTS mobile broadband full size miniPCIe module

## Dimensions

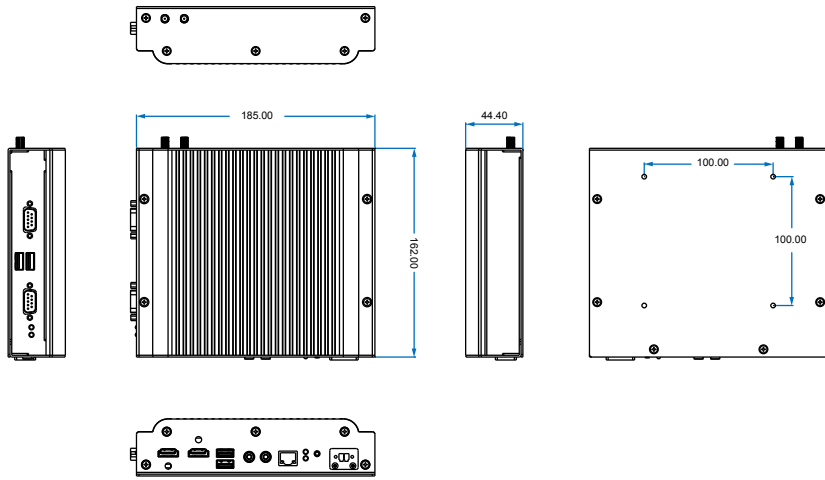

Unit: mm

## Packing List

Items
ARTiGO A1300 system
AC-to-DC power adapter
Power cord
Screws pack
HDMI strap holder
SATA + power cable
Mounting screws
HDD/SSD screws
Mini Card screws

## Smart Clients

NEW

# VIA ARTiGO A1250

Ultra-slim fanless system for semi-embedded industrial applications for digital signage media player



## Features


- 1.2GHz VIA Eden® X4 processor
- DX11 2D/3D graphics with MPEG-2/WMV9/VC1/H.264 decoding acceleration
- VIA MagicView™ content management software available
- Support for dual independent VGA + HDMI displays
- DC jack strap holder

## Specifications


<b>Model Name</b>	<b>ARTiGO A1250</b>
<b>Processor</b>	1.2GHz VIA Eden® X4
<b>Chipset</b>	VIA VX11H Media System Processor
<b>BIOS</b>	AMI Aptio UEFI BIOS, 32Mbit Flash memory
<b>System Power Management</b>	Timer Power-On ACPI compliant
<b>System Memory</b>	1 DDR3 1066/1333 SODIMM socket Up to 8GB memory size
<b>Storage</b>	Supports 1 2.5" SATA HDD/SSD
<b>Graphics</b>	Integrated Chrome® 640 DX11 3D/2D graphics with MPEG-2, WMV9, VC1 and H.264 video decoding acceleration
<b>Audio</b>	VIA VT2021 High Definition Audio Codec
<b>Display I/O</b>	1 Mini HDMI port 1 VGA port supporting VGA resolutions up to 2560 x1600 pixels Dual independent VGA + HDMI display at different resolutions, pixel depths, and refresh rates
<b>USB</b>	2 USB 3.0 ports 2 USB 2.0 ports
<b>LAN</b>	VIA VT6130 PCIe Gigabit Ethernet controller Supports wake-on-LAN and Boot from LAN (PXE)
<b>Front Panel I/O</b>	2 USB 2.0 ports 3 Audio jacks: Line-in, Line-out and Mic-in 1 Power on/off switch 1 Red LED for HDD activity 1 Green LED for power status
<b>Back Panel I/O</b>	2 USB 3.0 ports 1 Mini HDMI port 1 VGA port 1 Gigabit Ethernet port 1 DC strap holder hole 1 Antenna hole reserved to support Wi-Fi 1 DC-in jack
<b>Watch Dog Timer</b>	System reset; programmable 1~255 sec
<b>Power Supply</b>	12V DC-in (typical: 30W)
<b>Operating System</b>	Windows 8/7, WES 7, Linux
<b>Mechanical Construction</b>	Aluminum top cover chassis housing Galvanized steel sheet (SECC) body chassis housing Front removable aluminum face plate
<b>Mounting</b>	VESA mount
<b>Dimensions</b>	177mm(W) x 30mm(H) x 125mm(D) (6.96" x 1.18" x 4.92")
<b>Weight</b>	0.68kg (1.49lbs)
<b>Operating Temperature</b>	0°C ~ 40°C
<b>Operating Humidity</b>	0% ~ 90% (non-condensing)
<b>Storage Temperature</b>	-10°C ~ 60°C
<b>Compliance</b>	CE/FCC



## Front Panel External I/O

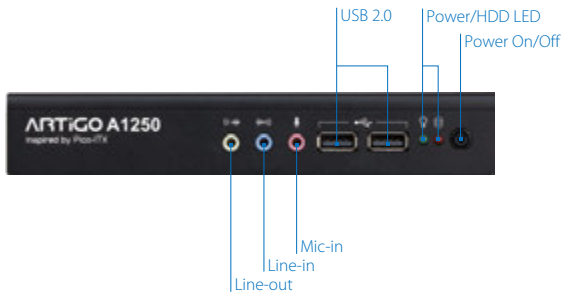

## Rear Panel External I/O

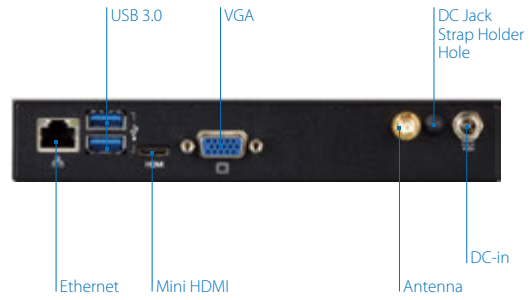

## Ordering Information

Part Number	CPU Frequency	Description
ATG-A1250-5Q12A3	VIA Eden® X4 @ 1.2GHz	1.2GHz VIA Eden® X4 CPU Based Semi-Embedded System with Mini HDMI, VGA, 2 USB 3.0, 2 USB 2.0, Gigabit Ethernet, SATA, 12V DC-in, US Power Cord
ATG-A1250-6Q12A3	VIA Eden® X4 @ 1.2GHz	1.2GHz VIA Eden® X4 CPU Based Semi-Embedded System with Mini HDMI, VGA, 2 USB 3.0, 2 USB 2.0, Gigabit Ethernet, SATA, 12V DC-in, EU Power Cord
ATG-A1250-7Q12A3	VIA Eden® X4 @ 1.2GHz	1.2GHz VIA Eden® X4 CPU Based Semi-Embedded System with Mini HDMI, VGA, 2 USB 3.0, 2 USB 2.0, Gigabit Ethernet, SATA, 12V DC-in, JP Power Cord
ATG-A1250-8Q12A3	VIA Eden® X4 @ 1.2GHz	1.2GHz VIA Eden® X4 CPU Based Semi-Embedded System with Mini HDMI, VGA, 2 USB 3.0, 2 USB 2.0, Gigabit Ethernet, SATA, 12V DC-in, CN Power Cord


## Optional Accessories

Wireless Accessories	
Part Number	Description
EMIO-1533-00A2	VNT9271 IEEE 802.11 b/g/n USB Wi-Fi module with assembly kit

Mounting Options	
Part Number	Description
99G42-09288E-1	Mechanism kit, wall mount bracket, 116mm x 116mm x 18.4mm

## Dimensions

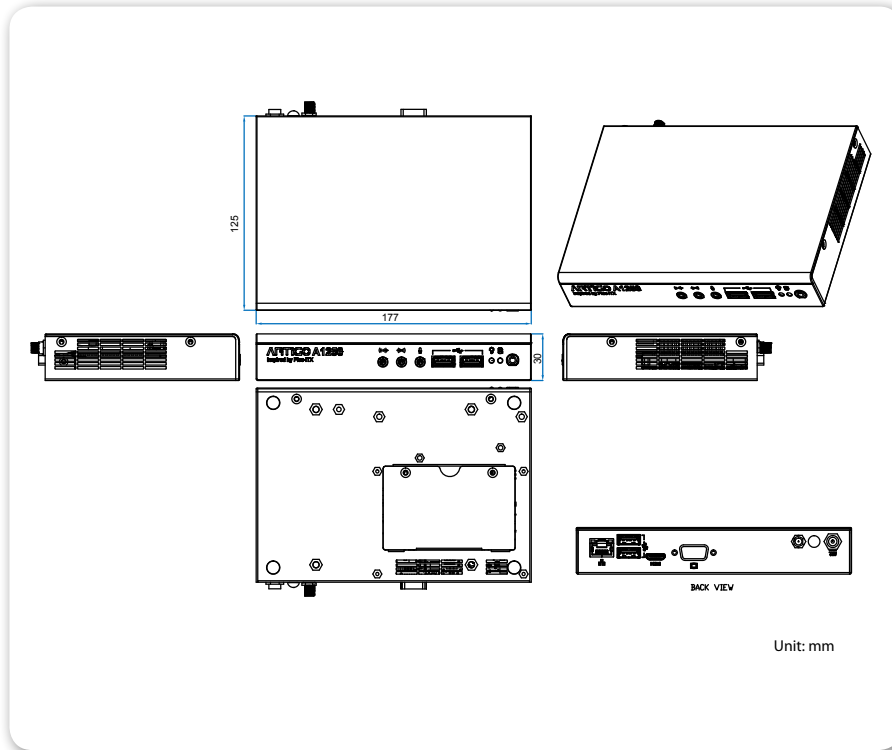

## Packing List

### Items

- ARTiGO A1250 system
- AC-to-DC power adapter
- Power cord
- HDD screws
- DC jack strap holder
- SATA ribbon cable

## Panel PCs

NEW

# VIA VIPRO VP7910

Fanless quad-core panel PC  
with 10.4" resistive touch  
screen



## Features


- Fanless VIA Eden® X4 quad-core processor
- Supports 5-wire resistive touch sensor
- Supports one mSATA and one hard disk drive bay
- Supports two minPCIe slots and two SIM card slots for 3G/Wi-Fi communication
- Front panel IP65 compliant against water and dust

## Specifications


Part Number	VP-7910-R1Q12A1	VP-7910-P1Q12A1	
Processor	1.2GHz VIA Eden® X4	1.2GHz VIA Eden® X4	
Chipset	VIA VX11H Media System Processor		
BIOS	AMI Aptio UEFI BIOS, 32Mbit Flash memory		
System Power Management	ACPI 3.0 compliant, Wake-on LAN, keyboard power-on, timer power-on, system power management, AC power failure recovery, Watch Dog timer control		
System Memory	1 DDR3 SODIMM socket, up to 8GB memory size Pre-assembled 2GB SDRAM		
Storage	Supports 1 2.5" SATA SSD/HDD 1 mSATA slot		
Graphics	Integrated VIA Chrome® 640 DX11 2D/3D graphics with MPEG-2, WMV9, VC1 and H.264 video decoding acceleration		
Audio	VIA VT2021 High Definition Audio Codec		
LCD Display	LCD Type	10.4" color TFT LCD	
	LCD MTBF	30,000 hrs	50,000 hrs
	Contrast Ratio	500:1	1400:1
	Luminance (cd/m <sup>2</sup> )	230	400
	Viewing Angle (H/V°)	80°(left), 80°(right), 60°(up), 70°(down)	89°(left), 89°(right), 89°(up), 89°(down)
	Pixel Pitch (mm)	0.264 x 0.264	0.2055 x 0.2055
	Max. Colors	16.2M	
	Max. Resolution	800 x 600	1024 x 768
Touch screen	Touch Type	5-wire Analog Resistive	Projected Capacitive multi touch
	Light Transmission	80% ± 3%	≥85%
	Controller	USB interface	
	Driver	Windows 8/7, Linux	
USB	2 USB 3.0 ports and 2 USB 2.0 host ports		
LAN	VIA VT6130 PCIe Gigabit Ethernet controller Realtek RTL8111G PCIe Gigabit Ethernet controller Supports Wake On LAN (WOL) Supports Preboot Execution Environment (PXE) 11x5-pin header reserved to support VIA VNT9271 802.11n Wi-Fi USB module		
COM	Fintek F81865		
Expansion I/O	2 miniPCIe slots (supports 2 SIM slots) Supports 3 external antenna for optional Wi-Fi, 3G module, and GPS module		



## Side System I/O



## Bottom System I/O

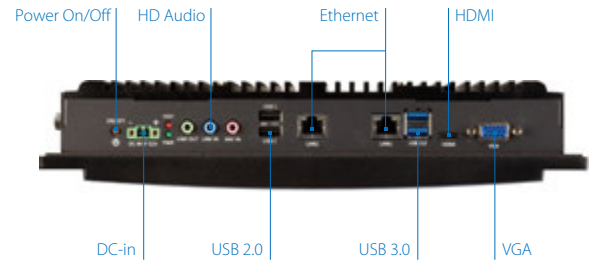

## Specifications

Part Number	VP-7910-R1Q12A1	VP-7910-P1Q12A1
<b>Bottom I/O</b>	2 USB 3.0 ports 2 USB 2.0 ports 1 Mini HDMI port 1 VGA port 2 Gigabit Ethernet ports 3 Audio jacks: Line-in, Line-out and Mic-in 1 Power on/off button 1 Red color LED for HDD activity 1 Green color LED for power status 1 2-pole Phoenix DC jack	
<b>Left Side I/O</b>	1 DIO port for 8-bit GPIO (4 GPI + 4 GPO) 3 COM ports for RS-232/422/485 (powered by selectable 5V/12V)	
<b>Watch Dog Timer</b>	System reset; programmable 1~255 sec	
<b>Power Supply</b>	9V ~ 32V DC-in (typical 29W) Supports over voltage protection, over current protection, under voltage protection	
<b>Operating System</b>	Windows7/8, WES 7, Linux	
<b>Mechanical Construction</b>	Aluminum mixed with heavy-duty steel	
<b>Mounting</b>	Panel mount/Wall/VESA mountable	
<b>Dimensions</b>	205mm(W)x 61mm(H) x 100mm(D) (11.8" x 8" x 2.4")	
<b>Weight</b>	3.6kg (7.9lbs)	
<b>Operating Temperature</b>	-10°C ~ 50°C: with qualified industrial grade DRAM, flash disk drive 0°C ~ 50°C: with default built in DRAM 0°C ~ 45°C: with 2.5" hard disk drive	
<b>Operating Humidity</b>	10% ~ 90% @ 45°C (non-condensing)	
<b>Storage Temperature</b>	-10°C ~ 70°C	
<b>Vibration Loading During Operation</b>	With mSATA flash: 5Grms, IEC 60068-2-64, random, 5 ~ 500Hz, 1hr/axis	
<b>Shock During Operation</b>	With mSATA flash: 50G, IEC 60068-2-27, half size, 11ms duration	
<b>Compliance</b>	CE/FCC	

## Ordering Information

Part Number	CPU Frequency	Description
VP-7910-R1Q12A1	VIA Eden® X4 @ 1.2GHz	1.2GHz VIA Eden® X4 CPU based fanless 10.4" Resistive touch panel system with 800 x 600 LCD, pre-assembled 2GB SDRAM, HDMI, VGA, 2 USB 3.0, 2 USB 2.0, 3 COM, DIO, 2 Gigabit Ethernet, SATA, mSATA, panel mount bracket, 9 ~ 32V DC-in
VP-7910-P1Q12A1	VIA Eden® X4 @ 1.2GHz	1.2GHz VIA Eden® X4 CPU based fanless 10.4" Projected Capacitive touch panel system with 1024 x 768 LCD, pre-assembled 2GB SDRAM, HDMI, VGA, 2 USB 3.0, 2 USB 2.0, 3 COM, DIO, 2 Gigabit Ethernet, SATA, mSATA, panel mount bracket, 9 ~ 32V DC-in



## Optional Accessories


### External AC-to-DC Adapter and Power Cord

Part Number	Description
99G63-020316	AC-to-DC adapter, 2-pole Phoenix connector, DC 12V/5A, 60W
99G33-02032C	Power cord, 180cm, USA type
99G33-02033C	Power cord, 180cm, Europe type

### Wireless Accessories

Part Number	Description
EMIO-2550-00A1	Ublox 3.75G HSPA/UMTS mobile broadband full size miniPCIe module with GPS and SIM card slot
EMIO-2550-01A1	Ublox 3.75G HSPA/UMTS mobile broadband full size miniPCIe module

## Dimensions

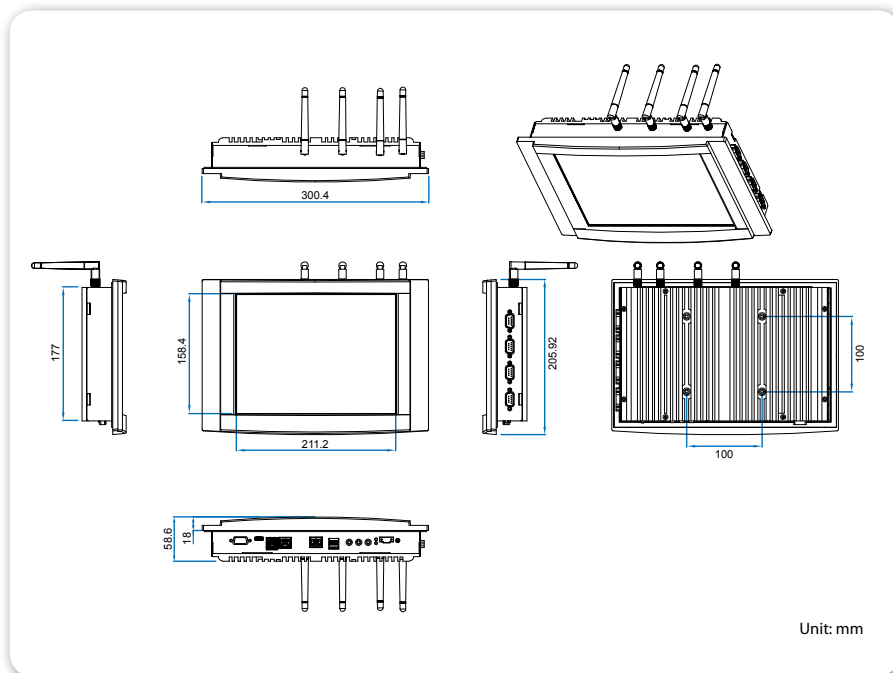

## Packing List

Items
VIPRO VP7910
Panel mount bracket
Screw pack for VESA mounting
Power cable, 2-pole phoenix DC-in jack connector

# VIA Embedded Accessories

- x86 Board Accessories
- ARM & x86 Wireless Accessories

Power Boards

# PWB-M120

DC to DC Power Board



Packing List

PWB-M120 power board
DC-in module
DC input power cable


Ordering Information

Part Number	Description
10GPWB-M12020	120W DC-DC power board, voltage range from 12V~24V

Expansion Modules

# PCI-E-03


One PCIe and One PCI Riser Card

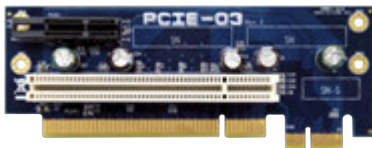

Expansion Modules

# EXT-PCI

One to Two PCI Riser Card



Features

- **Protection**  
Output Voltage Protection (Over Voltage Protection) OVP  
Output Current Protection (Output Short Protection)  
Output Voltage Protection (Under Voltage Protection) UVP
- **Operating Temperature:** 0 ~ 50°C
- **Operating Humidity:** 0% ~ 95% (non-condensing)
- **Dimensions:** 150mm x 51mm
- **Compatible models:** EPIA-M920, M910, M900, M860, VB7009
- **DC Input**

Input	Minimum	Nominal	Maximum
Voltage	11.4V~22.8V	12V~24V	12.6 V~25.2V
Current		5.42A~10.84A	

- **DC Output Voltage**

Output	Minimum	Nominal	Maximum	Maximum Combined Power
+5V_SB	4.75V	5V	5.25V	122.2W
+3.3V	3.14V	3.3V	3.47V	
+5V	4.75V	5V	5.25V	
+12V	11.4V	12V	12.6V	
Power Good	4.75V	5V	5.25V	

- **DC Output Current**

+5V_SB	+3.3V	+5V	+12V	-12V	Power Good	Maximum Combined Power
2A	6A	6A	5A	200mA	0.1A	122.2W

Features

- PCI and PCIe riser card to support one 1-lane PCIe slot and one PCI slot
- **Compatible models:** EPIA-M910, M860
- **Dimensions:** 131.58mm x 51.3mm

Packing List

PCI-E-03 module
-----------------

Ordering Information

Part Number	Description
10GU80000020	PCI & 1-lane PCIe riser card

Features

- Supports one to two PCI riser card
- **Compatible models:** EPIA-M910, M900, M860, VB7009
- **Dimensions:** 112mm x 46mm

Packing List

EXT-PCI module
----------------

Ordering Information

Part Number	Description
10GEXT-PCI101	One to two PCI riser card

Expansion Modules

# LPC-04


Expansion Module for Two or Four RS-232/422/485 Ports (5V or 12V)



Expansion Modules

# LPC-02

Expansion Module for Two RS-232 Ports and Two RS-232/422/485 Ports (5V or 12V)



Expansion Modules

# LPC-01

Expansion Module for Four RS-232 Ports (5V or 12V)



Features

- Expansion module for two or four COM ports (5V or 12V)
- 4 COM ports (COM1 ~ COM4) are selectable for RS-232/422/485
- Multiple GPIO support
- **Compatible models:** EPIA-P910, P900, M920, M910, VB7009
- **Dimensions:** 100mm x 60mm

Packing List

LPC-04 module (LPC-04R2 or LPC-04R4)  
LPC cable (for specific SKU)

Ordering Information

Part Number	Description
10GZ300030020	LPC-04R2 expansion module for two COM ports (5V or 12V)
10GZ300020020	LPC-04R4 expansion module for four COM ports (5V or 12V)

Features

- Expansion module for four COM ports (5V or 12V)
- COM1 & COM2 are selectable for RS-232/422/485, and COM3 & COM4 are dedicated for RS-232
- **Compatible models:** EPIA-P910, P900, M920, M910, VB7009
- **Dimensions:** 100mm x 60mm

Packing List

LPC-02 module  
LPC cable (for specific SKU)

Ordering Information

Part Number	Description
10GC600010020	Expansion module for four COM ports (5V or 12V)

Features

- Expansion module for four COM ports (5V or 12V)
- **Compatible models:** EPIA-P910, P900, M920, M910, VB7009
- **Dimensions:** 100mm x 40mm

Optional



Packing List

LPC-01 module  
LPC cable (For specific SKU)

Ordering Information

Part Number	Description
10GLPC0012020	Expansion module for four COM ports (5V or 12V)

Wireless Modules

# VNT9271/EMIO-1533

IEEE 802.11b/g/n USB Wi-Fi Module / Dongle



Features

- **Controller chip:** Atheros AR9271
- Compatible with IEEE 802.11b/g/n standards
- Operation at 2.4 ~ 2.5GHz frequency band to meet worldwide regulations
- Supports 802.11e WMM (Wi-Fi multimedia QoS standard)
- Maximum reliability, throughput and connectivity with automatic data rate switching
- Supports infrastructure networks via access point and ad-hoc network via peer-to-peer communication
- Supports WEP, WPA, WPA2 and 802.1X security mode
- Driver support for Android, Linux, Windows 8.1/8/7
- **Dimensions:** module: 17mm x 35mm; dongle: 16.2mm x 35mm
- **Compatible models:** Supports both ARM and x86 platforms with USB interface

Ordering Information

Part Number	Description
00GO27100BU2B0D0	VNT9271BU0DB IEEE 802.11b/g/n USB Wi-Fi dongle
EMIO-1533-00A2	VNT9271 IEEE 802.11 b/g/n USB Wi-Fi module with assembly kit

Packing List


VNT9271 dongle	EMIO-1533-00A2 2 Screws Washer metal Nut metal Dipole antenna Antenna cable USB transmittal cable
----------------	---

Mobile Broadband Modules

# EMIO-2550

3G HSPA/UMTS miniPCle Mobile Broadband

Module

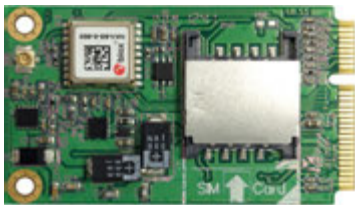

Features

- 3.75G UMTS/HSPA+ module
- Worldwide WCDMA(UMTS 800/850/900/1700/1900/2100 MH) and GPRS/EDGE coverage (GSM 850/900/1800/1900 MHz)
- HSDPA up to 21.1 Mb/s, HSUPA 5.76 Mb/s
- Integration of u-blox GPS/GNSS and A-GPS module (EMIO-2550-00A1 only)
- Integrated SIM card slot (EMIO-2550-00A1 only)
- **Dimensions:** 30mm x 51mm
- **Compatible models:**  
**ARM:** AMOS-820, ARTiGO A900, VAB-1000, VAB-820, VAB-600  
**x86:** AMOS-3005, AMOS-3003, AMOS-3002, ARTiGO A1300, VIPRO VP7910

Ordering Information

Part Number	Description
EMIO-2550-00A1	Ublox 3.75G HSPA/UMTS mobile broadband full size miniPCle module with GPS and SIM slot
EMIO-2550-01A1	Ublox 3.75G HSPA/UMTS mobile broadband full size miniPCle module

Packing List

Mobile broadband module
Screws pack
3G antenna cable
3G antenna
GPS antenna (only for EMIO-2550-00A1)
GPS antenna cable (only for EMIO-2550-00A1)

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Modules Accessories](#) category:*

*Click to view products by [VIA manufacturer](#):*

Other Similar products are found below :

[7010-0001](#) [AX98219](#) [A1UL8RISER](#) [F1UJPMICRISER](#) [FHW1U16RISER](#) [20-101-0440](#) [2828736-1](#) [MBCDROM](#) [AX61221TM](#) [VM-105](#)  
[EA CARREDIPTFT02](#) [RK-210E-B](#) [E226171106](#) [88606200030E](#) [SI-HDMI-EDID-EM](#) [MIC-75M13-00A1E](#) [FPM-1000T-SMKE](#) [AMK-](#)  
[R004E](#) [96FMCF-ST2ADAPTER1](#) [AHWKPTP12GBGB](#) [AXXSTCPUCAR](#) [FPK-07-R10](#) [Mini Din 6P to 6P HARNESS](#) [FPF1320 POWER](#)  
[MULTIPLEXER CARRIER](#) [881261510A0E](#) [AXXP3SWX08080](#) [conga-B7XD/CSP-Cu-B](#) [881281021A0E](#) [HFT for mounting KIT](#)  
[FN928X\\_FN929X](#) [BB-MH112-1A](#) [15100600](#) [9-5000-1116](#) [BKCMCR1ABB](#) [70763](#) [98R3612003E](#) [881261910A0E](#) [106897](#) [48222R](#)  
[BREAK OUT BOARD 20](#) [4D ARDUINO ADAPTOR SHIELD II](#) [20926110901](#) [PYCASE GREEN](#) [PYCASE BLUE](#) [FP15072\\_ZORYA-SC-](#)  
[HEKLA](#) [20952000004](#) [20953000007](#) [DP-DVI-R10](#) [575-BBIS](#) [RACK-220GW/A130B](#) [492-BBKM](#)