

SOM Modules

VIA

SOM-9X20

Ultra-compact solution for graphics-intensive edge computing applications


Features

- Qualcomm Snapdragon 820 quad-core SoC
- Enhanced video decoding supporting 4K@60fps, 8 x 1080p@30fps
- Built-in Wi-Fi 802.11 a/b/g/n/ac, Bluetooth 4.1, and GPS
- Compact form factor module with the MXM 3.0 314-pin connector
- Evaluation carrier board available

Board Placement

GPS/GNSS receiver

Wi-Fi + BT 4.1 LGA module

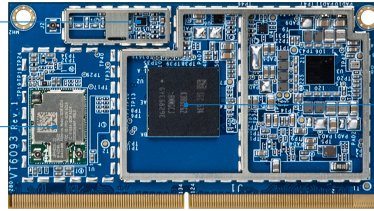


Snapdragon 820 SoC + POP LPDDR4 RAM


Specifications

Model Name	SOM-9X20
Processor	Qualcomm Snapdragon 820 quad-core SoC <ul style="list-style-type: none">- Two high-performance Kryo cores up to 2.15GHz- Two low power Kryo cores up to 1.593GHz
System Memory	4GB POP LPDDR4 RAM
Storage	64GB eMMC 5.1/UFS 2.0 Flash Memory
Graphics	Qualcomm Adreno 530 GPU 3D graphics accelerator with 64-bit addressing 624 MHz Graphics engine supporting OpenGL ES 3.1/GEP, GL4.4, DX11.3/4, OpenCL 2.0, Renderscript-Next Supports H.264, VP8, HEVC 8/10-bit, VP9 video decoding up to: 4K@60fps, 1080p@240fps, 8 x 1080p@30fps
Trusted Platform Module	TPM1.2 : ST33TPM12I2C
Wireless Connectivity	NFA324A-12H32 QCA6174A-1 Wi-Fi 802.11 a/b/g/n/ac + BT 4.1 combo LGA module with 2 antenna connectors Qualcomm WGR7640 GPS/GNSS RF receiver with antenna connector
HDMI	Integrated HDMI 2.0 Transmitter
Supported I/O through MXM 3.0 connector	1 HDMI port 2 MIPI DSI 4-Lane connectors 3 MIPI CSI 4-Lane connectors 1 USB 3.0 OTG 1 USB 2.0 host 1 SDIO 2 PCM/MI2S Multi-function pins for UART, I ² C, SPI, GPIO 1 JTAG 2 PCIe 2.0 1-Lane
Operating System	Android 8.0, Linux Kernel 3.18.44
Operating Temperature	-20°C ~ 70°C
Operating Humidity	0% ~ 95% (non-condensing)
Form Factor	8.2cm x 4.5cm (3.23" x 1.77")

Carrier Board Back Panel I/O

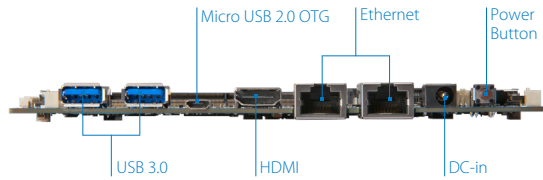

Carrier Board (SOMDB2)

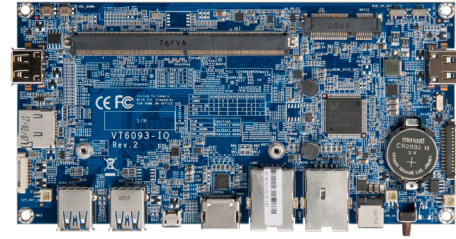


Specifications

Model Name	SOMDB2
Audio	Qualcomm WCD 9335 Audio Codec
LAN	RealTek RTL8111G Ethernet Controller RealTek RTL8365MB LAN Hub
Onboard I/O	<ul style="list-style-type: none"> 1 MIPI DSI LCD panel connector 1 MIPI CSI Interface for camera module 1 P-Cap Touch connector 2 USB 2.0 ports 1 USB 2.0 OTG switch (for Host mode/Device mode) 1 COM connector (TX/RX only for debugging) 1 GPIO connector (8 GPIO) 2 I²C connectors (for light & proximity sensor and NFC module) 1 Front panel connector 1 JTAG connector 1 Mic-in connector 2 2W speaker connectors 2 Audio module connectors (for VT6093 audio module) 2 Volume buttons 1 Boot switch 1 RTC battery connector 1 Micro SD card slot 1 miniPCIe slot 1 MXM 3.0 slot
Back Panel I/O	<ul style="list-style-type: none"> 1 HDMI port 2 USB 3.0 ports 1 Micro USB 2.0 OTG port (for debugging) 2 Gigabit Ethernet ports 1 Power button 1 12V DC-in jack
Operating Temperature	-20°C ~ 70°C
Operating Humidity	0% ~ 95% (non-condensing)
Form Factor	17cm x 8.6cm (6.69" x 3.89")
Compliance	RoHS

Ordering Information

Model Name	SoC Frequency	Description
10GWG23Q100A0	Qualcomm Snapdragon 820 quad-core SoC @ 2.15GHz/1.593GHz	SOM module with Qualcomm Snapdragon 820 quad-core SoC, 64GB eMMC/UFS, 4GB POP LPDDR4 RAM, HDMI, 2 DSI, 3 CSI, USB 3.0, USB 2.0, UART, GPIO, 1 SDIO, Wi-Fi + Bluetooth 4.1, GPS/GNSS, 2 PCIe 2.0 1-Lane
10GWH000000A0	N/A	SOMDB2 carrier board
STK-VT6093-00A1	Qualcomm Snapdragon 820 quad-core SoC @ 2.15GHz/1.593GHz	SOM-9X20 starter kit

Block Diagram

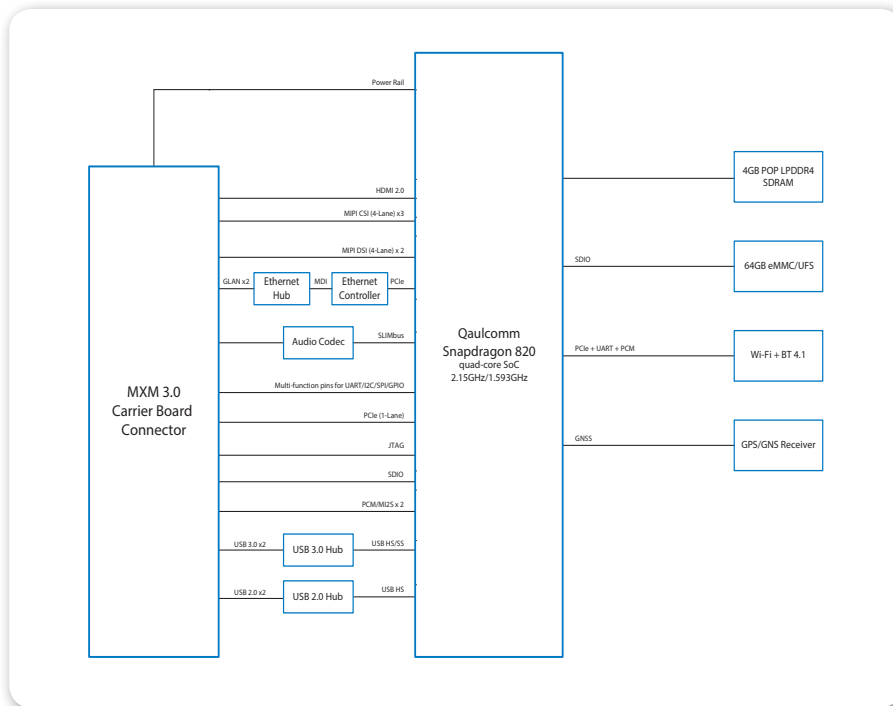

Packing List (Starter Kit)

Items for STK-VT6093-00A1

- SOM-9X20 module
- SOMDB2 carrier board
- VT6093 audio module
- COM cable
- AC adapter
- Power cord
- 2 Antennas for Wi-Fi & Bluetooth

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [System-On-Modules - SOM category](#):

Click to view products by [VIA manufacturer](#):

Other Similar products are found below :

[COMX-CORE-310](#) [COMX-P4040-4G-ENP2](#) [PICOIMX6U10R1GBNI4G](#) [PICOIMX6U10R1GBNI4GBW](#) [MC27561-TIGER](#) [MC27561-LION](#) [CC-WMX6UL-SMPL](#) [CB-52-PUS-110-SX](#) [BD63725BEFV-EVK-002](#) [5728-PJ-4AA-RI](#) [A00150](#) [COMX_P4080](#) [A20-SOM-EVB](#) [RK3188-SOM](#) [RK3188-SOM-4GB](#) [100-1225-1](#) [PICOIMX6Q10R1GBNI4G](#) [Nit6Q](#) [A20-SOM-N8GB](#) [PER-TAICX-A10-001](#) [PER-TAIX2-A10-2280](#) [EDL-mPCIe-MA2485](#) [SOM-5897C7-U0A1E](#) [SOM-6896C7-U2A1E](#) [SCM180-Dual-2G_Industrial](#) [3354-HX-X38-RC](#) [5728-PJ-4AA-RC](#) [6455-JE-3X5-RC](#) [Morph-IC-II](#) [ET876-X7LV](#) [IFC6301-10-P2](#) [IFC6502-00-P1](#) [IFC67A1-00-P1](#) [IFC6701-00-P1](#) [iW-G33M-SCMQ-4L002G-E008G-BII](#) [PWSE1000200B](#) [CS-DEPTHAI-04](#) [MTQ-LNA7-B02](#) [MYC-C8MMQ6-8E2D-180-C](#) [MYD-C4378-4E512D-100-I](#) [MOD5213-100IR](#) [A20-SOM](#) [A20-SOM204-1G](#) [A20-SOM204-1GS16ME16G-MC](#) [AM3352-SOM-EVB](#) [BS1-IC](#) [BS2-IC](#) [102110278](#) [SLS16Y2_792C_256R_256N_0SF_I](#) [SLS12RT52_528C_0R_4QSPI_0SF_I](#)