

ARM-based Pico-ITX Series


VIA VAB-600

Flexible low-power platform for a broad range of interactive multimedia applications

Features

- Compact 10cm x 7.2cm Pico-ITX form factor
- 800MHz VIA Cortex-A9 SoC
- Support for two COM ports (TX/RX)
- Optional Wi-Fi module
- Android and Linux software solution packs available

Board Placement

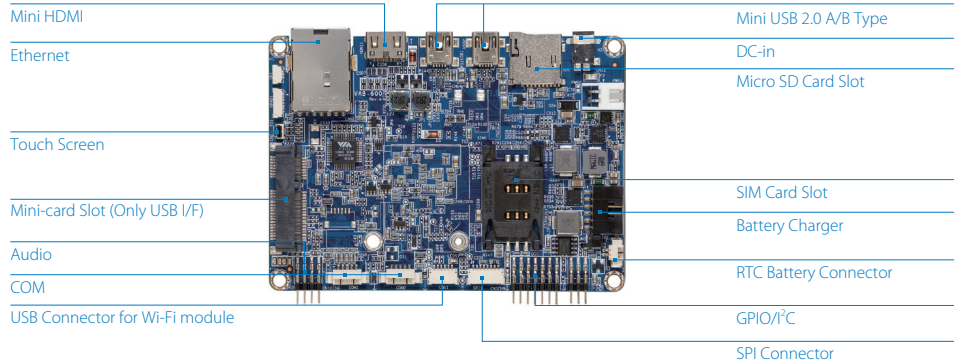


Specifications


Model Name	VAB-600
Processor	800MHz VIA Cortex-A9 SoC
System Memory	1GB DDR3 SDRAM onboard
Storage	4GB eMMC Flash memory
Boot Loader	512KB SPI Flash ROM
Graphics	Mali-400 SP GPU 2 integrated, independent 3D/2D graphics processing units Graphics engine supporting OpenGL® ES 2.0 hardware acceleration Supports MPEG-2, VC-1 and H.264 video decoding up to 1080p
LAN	VIA VT6113 10/100 base-TX PHY chip
Audio	VIA VT1603A I2S Audio Codec
HDMI	Integrated HDMI 1.4 transmitter
Expansion I/O	1 miniPCIe slot (supports USB 2.0 connectivity for optional 3G module)
Onboard I/O	1 USB 2.0 connector 1 DVO connector for TTL or LVDS display (corresponding daughter card required) 2 COM port connectors (TX/RX) 1 Miscellaneous pin header for 1 I²C pair and 1 DIO (4 GPI + 4 GPO) 1 SIM card slot (supports 3G module without built-in SIM card slot) 1 RTC battery pin header 1 Keypad connector 1 CIR connector 1 SPI Flash pin header 1 Front panel pin header for system power-on, reset and power LED 1 4-wire resistive touch screen FPC connector (through VT1603A) 1 Front audio pin header for Line-out, Mic-in 1 DC-in connector 1 Battery charger connector with smart battery function (manufacturing option) 1 miniPCIe slot (supports USB 2.0 connectivity for optional 3G module)
Back Panel I/O	2 Mini USB 2.0 ports 1 Mini HDMI port 1 10/100Mbps Ethernet port 1 Micro SD card slot 1 DC-in jack
Power Supply	12V ~ 24V DC-in
Operating System	Android 4.0.3, Linux kernel 3.0.8
Operating Temperature	0°C ~ 60°C
Operating Humidity	0% ~ 95% (non-condensing)
Form Factor	Pico-ITX (10cm x 7.2cm, 3.9" x 2.8")
Compliance	CE, FCC



Back Panel I/O

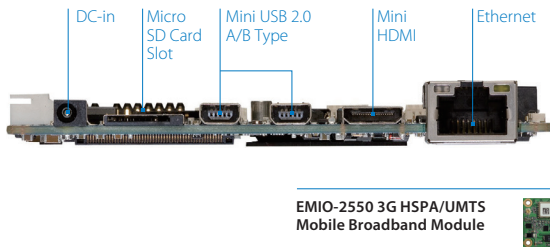

Accessories

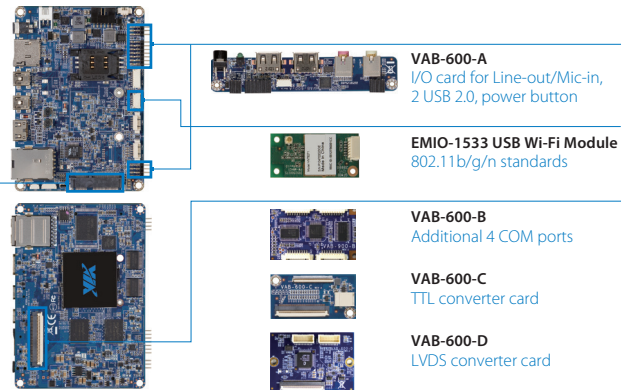

Ordering Information

Part Number	SoC Frequency	Description
10GAU082000A0	VIA Cortex-A9 SoC @ 800MHz	Pico-ITX board with 800MHz VIA Cortex-A9 SoC, 4GB eMMC, 512KB SPI Flash ROM, 1GB DDR3 SDRAM, Mini HDMI, 2 Mini USB 2.0, 2 COM, 10/100Mbps Ethernet, Micro SD card slot, miniPCIe slot, 12 ~ 24V DC-in

Optional Accessories


I/O Expansion Cards

Part Number	Description
10GAX00000020	VAB-600-A I/O card for Line-out, Mic-in, 2 USB 2.0 ports, Power button
10GAZ00000020	VAB-600-B I/O card for additional 4 COM ports
10GBC00000020	VAB-600-C TTL converter card
10GBD00000020	VAB-600-D Dual-CH LVDS converter card

Wireless Modules

Part Number	Description
EMIO-1533-00A2	VNT9271 IEEE 802.11 b/g/n USB Wi-Fi module with assembly kit
EMIO-2550-01A1	3.75G HSPA/UMTS mobile broadband full size miniPCIe module with GPS

Block Diagram

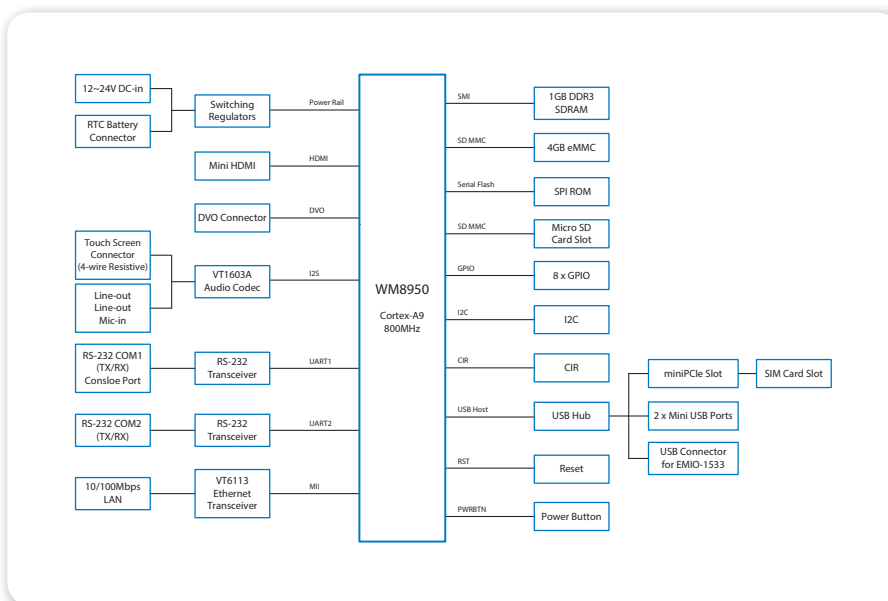

Packing List

Items
VAB-600 board
DC power cable
Front panel cable
Audio cable
COM cable
USB cable

Items for Starter Kit

VAB-600 board
AC-to-DC adapter
DC power cable
VAB-600-A I/O card
VAB-600-D I/O card
Keypad cable
GPIO/I ² C cable
Front panel cable
Audio cable
COM cable
USB cable
USB cable for USB Wi-Fi module
7" LVDS panel with cable (optional)

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Single Board Computers](#) category:

Click to view products by [VIA manufacturer](#):

Other Similar products are found below :

[MANO882VPGGA-H81](#) [SSD3200W-S-SLC-INN 20-101-0738](#) [MVME61006E-2173R](#) [SHB230DGGA-RC](#) [IMB210VGGA](#) [IB915F-3955](#)
[MI958F-16C](#) [S2600WFT](#) [S2600STB](#) [BBS2600BPS](#) [BLKNUC7I3DNHNC1978015](#) [DEV-17745](#) [BEAGLEBOARD POCKET](#) [MICROSOM](#)
[I2 + WIFI/BT](#) [HUMMINGBOARD-I2EX](#) [BASE + WIFI/BT](#) [HUMMINGBOARD-I4 PRO + WIFI/BT](#) [VAB-600-B](#) [MITX-440-DVI-2E](#)
[ATCA-7365-D-24GB](#) [NITX-315-DEVKIT](#) [A13-SOM-512](#) [NITX-315](#) [BANANA PI BPI-M1+](#) [A13-SOM-WIFI-4GB](#) [AM3359-SOM-EVB-](#)
[IND](#) [UPS-APLC2-A10-0432](#) [DFR0419](#) [UPS-APLP4-A10-0864](#) [UPS-APLP4-A10-0432](#) [UPS-APLP4-A10-08128](#) [MI977F-Q27](#) [BBBLUE](#)
[IB811F-I30](#) [DFR0470-ENT](#) [Nit6Q_i](#) [M2M \(TELIT\)](#) [RELAY](#) [PROFESSIONAL](#) [GCS22.2.080.2.2.I](#) [GCS22.8.100.4.2.I](#) [GLS11.2.053.2.2.E](#)
[A20-OLINUXINO-LIME-E16GS16M](#) [A20-OLINUXINO-LIME-S16M](#) [A20-OLINUXINO-LIME2-E16GS16M](#) [A20-OLINUXINO-MICRO-](#)
[S16M](#) [BANANA PI BPI-W2](#) [T2-OLINUXINO-LIME2-S16M-IND](#) [T2-OLINUXINO-MICRO-E8GS16M-IND](#) [T2-OLINUXINO-MICRO-](#)
[S16M-IND](#)