



DATE	REV	DESCRIPTION	BY	CHKD

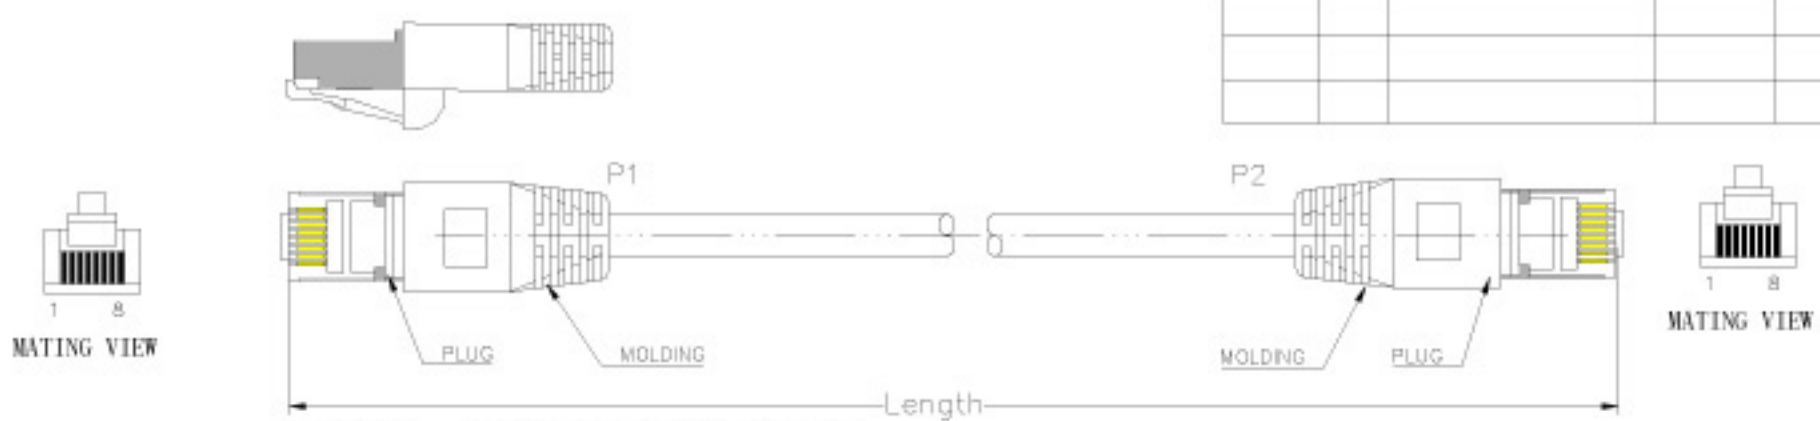

Marking: (LP009) FIP CAT. 5E PATCH ISO/IEC 11801 & EN 50288  
 3P VERIFIED FOR GIGABIT ETHERNET 26AWG×4P TYPE  
 CM(UL)C(UL) CME E164469-F3

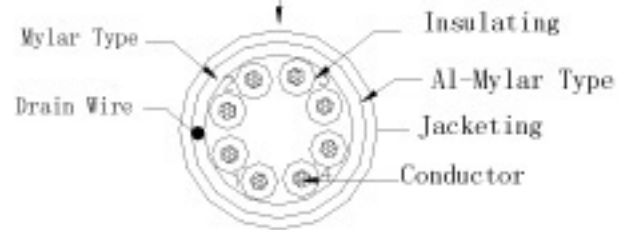


orange 1	green 2
white/orange	white/green
blue 3	brown 4
white/blue	white/brown

Conductor	Bare Copper 26AWG 7/0.15a & 0.15mm
Insulation	Thickness MIN at any point 0.13mm MAX AVG 0.25mm Diameter 0.70a & 0.26mm
Jacketing	Thickness MIN at any point 0.80mm MAX AVG 0.85mm Diameter 0.8 & 0.26mm

WIRE	CAT. 5E FTP STR 26AWG
Plug	YS-02
Length	1M
COLOR	Gray825

Lead	<1000ppm
Cadmium	<100ppm
Mercury	<1000ppm
Chromium	<1000ppm
PBB	<1000ppm
PBDE	<1000ppm

PA/R	PINOUT		
	P1 (T568B)	WIRE	P2 (T568B)
1	1	WHT/ORG	1
	2	ORG	2
2	3	WHT/GRN	3
	6	GRN	6
3	4	BLU	4
	5	WHT/BLU	5
4	7	WHT/BRN	7
	8	BRN	8

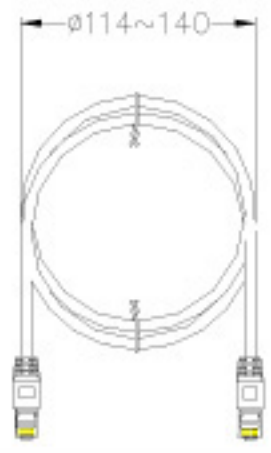

ROHS compliant from OCT. 2004

Unless specified on the drawing, tolerances are per the follows:

.X	± 1
.XX	± 0.2
.XXX	± 0.05

3RD

DRAW. NO	YS-02	ITEM	1962-		
DEPARTMENT		DRAW	Peace Jing	DATE	2006/03/20
SCALE		CHECKER	APPROVAL		
UNIT	MM	SHEET	1	OF	1

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [videk manufacturer](#):*

Other Similar products are found below :

[2129HQ-1](#) [1996-10B](#) [1054](#) [2993-10BK](#) [2996AS-1GY](#) [2961-15G](#) [2965-0.5RG](#) [2965-0.75Y](#) [2965-10Y](#) [2965-30IM](#) [4093-2](#) [8920-4.3](#) [1963-3](#)  
[1962-10R](#) [2259](#) [2961-30BK](#) [2965-30G](#) [2965-3BK](#) [2965-1.5B](#) [2996AS-0.5Y](#) [2129GHQ-5](#) [8103](#) [2419-2](#) [2965-0.3PK](#) [2965-1.5RG](#) [2965-2PR](#)  
[2965-30](#) [2965-30BK](#) [2996-5Y](#) [3073-10](#) [2409M-2](#) [2993-3RG](#) [2996AS-10B](#) [2996AS-5G](#) [2996AS-5R](#) [1962-3](#) [2996AS-3](#) [2965-15BK](#) [8104](#)  
[2561-1](#) [9301-5](#) [2965-0.75BK](#) [2965-30B](#) [2965-3RG](#) [2996AS-10BK](#) [2218D-2](#) [1962-5](#) [2129GHQ-3](#) [2965-15B](#) [2965-15Y](#)