

TRANSZORB® Transient Voltage Suppressors



Case Style P600

MAJOR RATINGS AND CHARACTERISTICS	
V_{WM}	5.0 V to 188 V
P_{PPM}	5000 W
P_D	8.0 W
I_{FSM}	500 A
T_j max.	175 °C

FEATURES



- P600, glass passivated chip junction
- Available in Unidirectional polarity only
- 5000 W peak pulse power capability with a 10/1000 μ s waveform, repetitive rate (duty cycle): 0.01 %
- Excellent clamping capability
- Very fast response time
- Low incremental surge resistance
- Typical I_D less than 1 μ A $V_{(BR)}$ above 10 V rating
- Solder Dip 260 °C, 40 seconds
- Component in accordance to RoHS 2002/95/EC and WEEE 2002/96/EC

TYPICAL APPLICATIONS

Use in sensitive electronics protection against voltage transients induced by inductive load switching and lighting on ICs, MOSFET, signal lines of sensor units for consumer, computer, industrial, automotive and telecommunication.

MECHANICAL DATA

Case: Molded epoxy body over passivated junction

Epoxy meets UL 94V-0 flammability rating

Terminals: Matte tin plated leads, solderable per J-STD-002B and JESD22-B102D

E3 suffix for commercial grade, HE3 suffix for high reliability grade (AEC Q101 qualified)

Polarity: Color band denotes cathode end

MAXIMUM RATINGS ($T_A = 25$ °C unless otherwise noted)			
PARAMETER	SYMBOL	VALUE	UNIT
Peak pulse power dissipation with a 10/1000 μ s waveform ⁽¹⁾	P_{PPM}	5000	W
Peak pulse current with a 10/1000 μ s waveform ⁽¹⁾	I_{PPM}	see next table	A
Power dissipation on infinite heatsink at $T_L = 75$ °C (Fig. 5)	P_D	8.0	W
Peak forward surge current 8.3 ms single half sine-wave (Fig. 5)	I_{FSM}	600	A
Instantaneous forward voltage at 100 A ⁽²⁾	V_F	3.5	V
Operating junction and storage temperature range	T_J, T_{STG}	- 55 to + 175	°C

Note:

(1) Non-repetitive current pulse, per Fig. 3 and derated above $T_A = 25$ °C per Fig. 2

(2) Measured on 8.3 ms single half sine-wave or equivalent square wave, duty cycle = 4 pulses per minute maximum

5KP5.0 thru 5KP188A

Vishay General Semiconductor



ELECTRICAL CHARACTERISTICS ($T_A = 25\text{ }^\circ\text{C}$ unless otherwise noted)								
DEVICE TYPE	BREAKDOWN VOLTAGE $V_{(BR)}$ (V) ⁽¹⁾		TEST CURRENT AT I_T (mA)	STAND-OFF VOLTAGE V_{WM} (V)	MAXIMUM REVERSE LEAKAGE AT V_{WM} I_D (μ A)	MAXIMUM PEAK PULSE CURRENT I_{PPM} ⁽²⁾ (A)	MAXIMUM CLAMPING VOLTAGE AT I_{PPM} V_C (V)	MAXIMUM TEMPERATURE COEFFICIENT OF $V_{(BR)}$ (%/ $^\circ\text{C}$)
	MIN	MAX						
5KP5.0	6.40	7.30	50	5.0	2000	521	9.6	0.057
5KP5.0A	6.40	7.00	50	5.0	2000	543	9.2	0.057
5KP6.0	6.67	8.15	50	6.0	5000	439	11.4	0.061
5KP6.0A	6.67	7.37	50	6.0	5000	485	10.3	0.061
5KP6.5	7.22	8.82	50	6.5	2000	407	12.3	0.065
5KP6.5A	7.22	7.98	50	6.5	2000	446	11.2	0.065
5KP7.0	7.78	9.51	50	7.0	1000	376	13.3	0.068
5KP7.0A	7.78	8.60	50	7.0	1000	417	12.0	0.068
5KP7.5	8.33	10.2	5.0	7.5	250	350	14.3	0.073
5KP7.5A	8.33	9.21	5.0	7.5	250	388	12.9	0.073
5KP8.0	8.89	10.9	5.0	8.0	150	333	15.0	0.075
5KP8.0A	8.89	9.83	5.0	8.0	150	368	13.6	0.075
5KP8.5	9.44	11.5	5.0	8.5	50	314	15.9	0.078
5KP8.5A	9.44	10.4	5.0	8.5	50	347	14.4	0.078
5KP9.0	10.0	12.2	5.0	9.0	20	296	16.9	0.081
5KP9.0A	10.0	11.1	5.0	9.0	20	325	15.4	0.081
5KP10	11.1	13.6	5.0	10.0	15	266	18.8	0.084
5KP10A	11.1	12.3	5.0	10.0	15	294	17.0	0.084
5KP11	12.2	14.9	5.0	11.0	10	249	20.1	0.086
5KP11A	12.2	13.5	5.0	11.0	10	275	18.2	0.086
5KP12	13.3	16.3	5.0	12.0	5.0	227	22.0	0.088
5KP12A	13.3	14.7	5.0	12.0	5.0	251	19.9	0.088
5KP13	14.4	17.6	5.0	13.0	2.0	210	23.8	0.090
5KP13A	14.4	15.9	5.0	13.0	2.0	233	21.5	0.090
5KP14	15.6	19.1	5.0	14.0	2.0	194	25.8	0.092
5KP14A	15.6	17.2	5.0	14.0	2.0	216	23.2	0.092
5KP15	16.7	20.4	5.0	15.0	2.0	186	26.9	0.094
5KP15A	16.7	18.5	5.0	15.0	2.0	205	24.4	0.094
5KP16	17.8	21.8	5.0	16.0	2.0	174	28.8	0.096
5KP16A	17.8	19.7	5.0	16.0	2.0	192	26.0	0.096
5KP17	18.9	23.1	5.0	17.0	2.0	164	30.5	0.097
5KP17A	18.9	20.9	5.0	17.0	2.0	181	27.6	0.097
5KP18	20.0	24.4	5.0	18.0	2.0	155	32.2	0.098
5KP18A	20.0	22.1	5.0	18.0	2.0	171	29.2	0.098
5KP20	22.2	27.1	5.0	20.0	2.0	140	35.8	0.099
5KP20A	22.2	24.5	5.0	20.0	2.0	154	32.4	0.099
5KP22	24.4	29.8	5.0	22.0	2.0	127	39.4	0.100
5KP22A	24.4	26.9	5.0	22.0	2.0	141	35.5	0.100
5KP24	26.7	32.6	5.0	24.0	2.0	116	43.0	0.101
5KP24A	26.7	29.5	5.0	24.0	2.0	129	38.9	0.101
5KP26	28.9	35.3	5.0	26.0	2.0	107	46.6	0.101
5KP26A	28.9	31.9	5.0	26.0	2.0	119	42.1	0.101
5KP26A	28.9	31.9	5.0	26.0	2.0	119	42.1	0.101
5KP28	31.1	38.0	5.0	28.0	2.0	100	50.1	0.102
5KP28A	31.1	34.4	5.0	28.0	2.0	110	45.4	0.102
5KP30	33.3	40.7	5.0	30.0	2.0	93.5	53.5	0.103
5KP30A	33.3	36.8	5.0	30.0	2.0	103	48.4	0.103
5KP33	36.7	44.9	5.0	33.0	2.0	84.7	59.0	0.104
5KP33A	36.7	40.6	5.0	33.0	2.0	93.8	53.3	0.104
5KP36	40.0	48.9	5.0	36.0	2.0	77.8	64.3	0.104
5KP36A	40.0	44.2	5.0	36.0	2.0	86.1	58.1	0.104



ELECTRICAL CHARACTERISTICS (T _A = 25 °C unless otherwise noted)								
DEVICE TYPE	BREAKDOWN VOLTAGE V _(BR) (V) ⁽¹⁾		TEST CURRENT AT I _T (mA)	STAND-OFF VOLTAGE V _{WM} (V)	MAXIMUM REVERSE LEAKAGE AT V _{WM} I _D (µA)	MAXIMUM PEAK PULSE CURRENT I _{PPM} ⁽²⁾ (A)	MAXIMUM CLAMPING VOLTAGE AT I _{PPM} V _C (V)	MAXIMUM TEMPERATURE COEFFICIENT OF V _(BR) (%/°C)
	MIN	MAX						
5KP40	44.4	54.3	5.0	40.0	2.0	70.0	71.4	0.105
5KP40A	44.4	49.1	5.0	40.0	2.0	77.5	64.5	0.105
5KP43	47.8	58.4	5.0	43.0	2.0	65.2	76.7	0.105
5KP43A	47.8	52.8	5.0	43.0	2.0	72.0	69.4	0.105
5KP45	50.0	61.1	5.0	45.0	2.0	62.3	80.3	0.106
5KP45A	50.0	55.3	5.0	45.0	2.0	68.8	72.7	0.106
5KP48	53.3	65.2	5.0	48.0	2.0	58.5	85.5	0.106
5KP48A	53.3	58.9	5.0	48.0	2.0	64.6	77.4	0.106
5KP51	56.1	69.3	5.0	51.0	2.0	54.9	91.1	0.107
5KP51A	56.7	62.7	5.0	51.0	2.0	60.7	82.4	0.107
5KP54	60.0	73.3	5.0	54.0	2.0	51.9	96.3	0.107
5KP54A	60.0	66.3	5.0	54.0	2.0	57.4	87.1	0.107
5KP58	64.4	78.7	5.0	58.0	2.0	48.5	103	0.107
5KP58A	64.4	71.2	5.0	58.0	2.0	53.4	94	0.107
5KP60	66.7	81.5	5.0	60.0	2.0	46.7	107	0.108
5KP60A	66.7	73.7	5.0	60.0	2.0	51.7	97	0.108
5KP64	71.1	96.9	5.0	64.0	2.0	43.9	114	0.108
5KP64A	71.1	78.6	5.0	64.0	2.0	48.5	103	0.108
5KP70	77.6	95.1	5.0	70.0	2.0	40.0	125	0.108
5KP70A	77.8	86.0	5.0	70.0	2.0	44.2	113	0.108
5KP75	83.3	102	5.0	75.0	2.0	37.3	134	0.108
5KP75A	83.3	92.1	5.0	75.0	2.0	41.3	121	0.108
5KP78	86.7	106.0	5.0	78.0	2.0	36.0	139	0.108
5KP78A	86.7	95.8	5.0	78.0	2.0	39.7	126	0.108
5KP85	94.4	115	5.0	85.0	2.0	33.1	151	0.108
5KP85A	94.4	104	5.0	85.0	2.0	36.5	137	0.110
5KP90	100	122	5.0	90.0	2.0	31.3	160	0.110
5KP90A	100	111	5.0	90.0	2.0	34.2	146	0.110
5KP100	111	136	5.0	100	2.0	27.9	179	0.110
5KP100A	111	123	5.0	100	2.0	30.9	162	0.110
5KP110	122	149	5.0	110	2.0	25.5	196	0.112
5KP110A	122	135	5.0	110	2.0	28.2	177	0.112
5KP120	133	163	5.0	120	2.0	23.4	214	TBD
5KP120A	133	147	5.0	120	2.0	25.9	193	TBD
5KP130	144	176	5.0	130	2.0	21.6	230	TBD
5KP130A	144	159	5.0	130	2.0	23.9	209	TBD
5KP150	167	204	5.0	150	2.0	18.7	268	TBD
5KP150A	167	185	5.0	150	2.0	20.6	243	TBD
5KP160	178	218	5.0	160	2.0	17.4	287	TBD
5KP160A	178	197	5.0	160	2.0	19.3	259	TBD
5KP170	189	231	5.0	170	2.0	16.4	304	TBD
5KP170A	189	209	5.0	170	2.0	18.2	275	TBD
5KP188	209	255	5.0	188	2.0	14.5	344	TBD
5KP188A	209	231	5.0	188	2.0	15.2	328	TBD

Note:

- (1) Pulse test: t_p ≤ 50 ms
- (2) Surge current waveform per Fig. 3 and derate per Fig. 2
- (3) All items and symbols are consistent with ANSI/IEEE C62.35

ORDERING INFORMATION				
PREFERRED P/N	UNIT WEIGHT (g)	PREFERRED PACKAGE CODE	BASE QUANTITY	DELIVERY MODE
5KP5.0A-E3/54	2.776	54	800	13" Diameter Paper Tape & Reel

RATINGS AND CHARACTERISTICS CURVES

($T_A = 25\text{ }^\circ\text{C}$ unless otherwise noted)

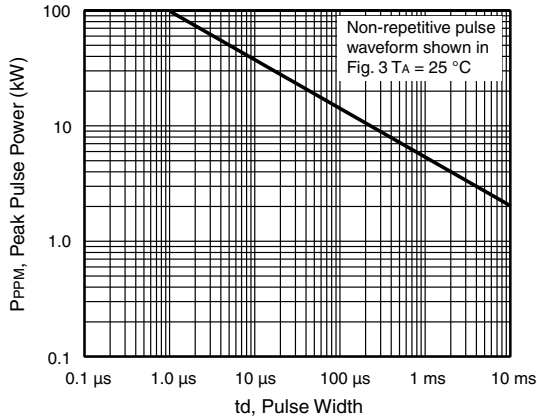


Figure 1. Peak Pulse Power Rating Curve

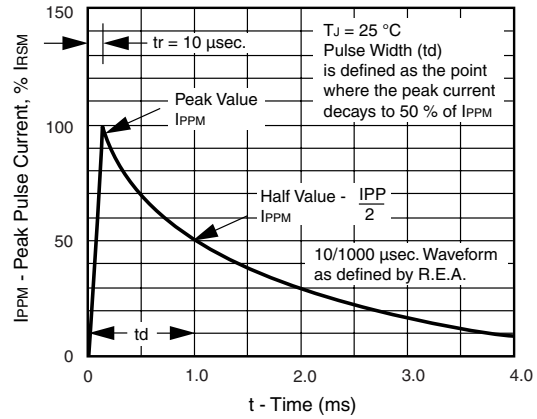


Figure 3. Pulse Waveform

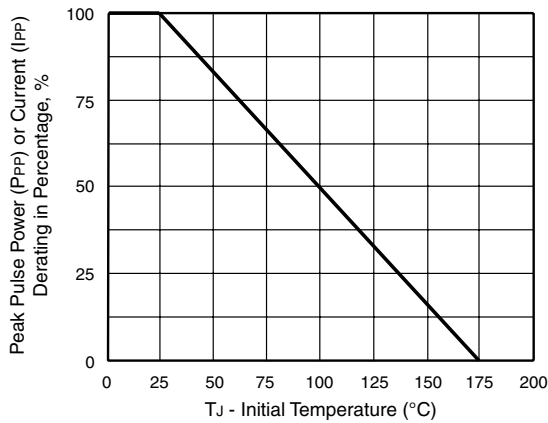


Figure 2. Pulse Power or Current vs. Initial Junction Temperature

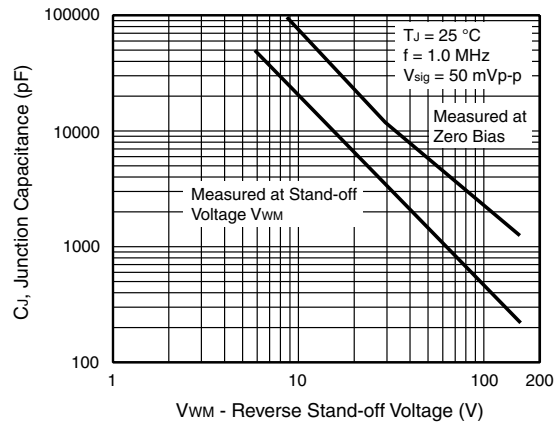


Figure 4. Typical Junction Capacitance

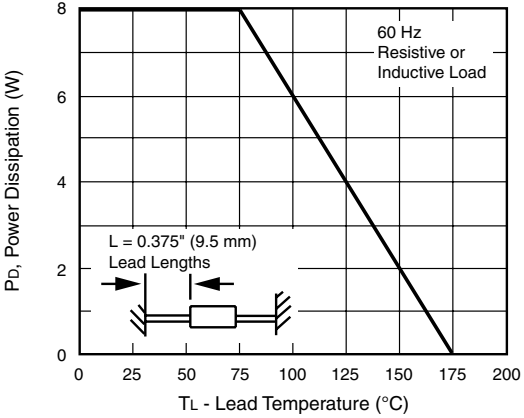


Figure 5. Power Derating Curve


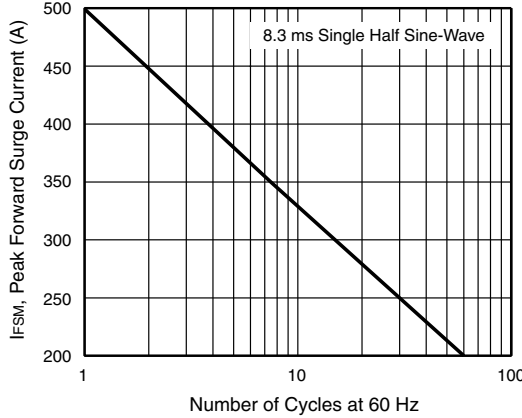


Figure 6. Maximum Non-repetitive Forward Surge Current

PACKAGE OUTLINE DIMENSIONS in inches (millimeters)

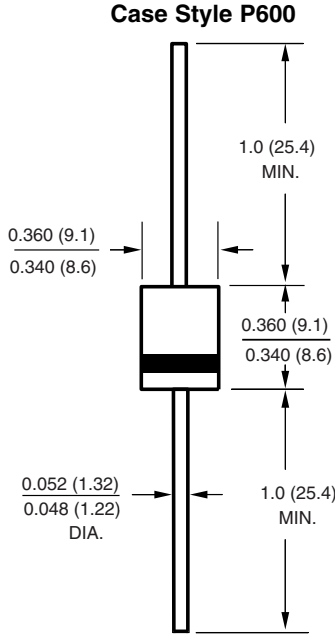

APPLICATION NOTE

The 5KP series of high power transient voltage suppressors were designed to be used on the output of switching power supplies. These devices may be used to replace crowbar circuits. Both the 5 and 10 percent voltage tolerances are referenced to the power supply output voltage level.

They are able to withstand high levels of peak current while allowing a circuit breaker to trip or a fuse blow before shorting. This will enable the user to reset the breaker or replace the fuse and continue operation. For this type operation, it is recommended that a sufficient mounting surface be used for dissipating the heat generated by the Transient Voltage Suppressor during the transient or over-voltage condition.



Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [ESD Suppressors / TVS Diodes](#) category:

Click to view products by [Vishay](#) manufacturer:

Other Similar products are found below :

[60KS200C](#) [D12V0H1U2WS-7](#) [D18V0L1B2LP-7B](#) [82356050220](#) [D5V0M5U6V-7](#) [NTE4902](#) [P4KE27CA](#) [P6KE11CA](#) [P6KE39CA-TP](#)
[P6KE8.2A](#) [SA110CA](#) [SA60CA](#) [SA64CA](#) [SMBJ12CATR](#) [SMBJ8.0A](#) [SMLJ30CA-TP](#) [ESD101-B1-02ELS E6327](#) [ESD112-B1-02EL E6327](#)
[ESD119B1W01005E6327XTSA1](#) [ESD5V0J4-TP](#) [ESD5V0L1B02VH6327XTSA1](#) [ESD7451N2T5G](#) [19180-510](#) [CPDT-5V0USP-HF](#)
[3.0SMCJ33CA-F](#) [3.0SMCJ36A-F](#) [HSPC16701B02TP](#) [D3V3Q1B2DLP3-7](#) [D55V0M1B2WS-7](#) [DESD5V0U1BL-7B](#) [DRTR5V0U4SL-7](#)
[SCM1293A-04SO](#) [ESD200-B1-CSP0201 E6327](#) [ESD203-B1-02EL E6327](#) [SM12-7](#) [SMF8.0A-TP](#) [SMLJ45CA-TP](#) [CEN955 W/DATA](#)
[82350120560](#) [82356240030](#) [VESD12A1A-HD1-GS08](#) [CPDUR5V0R-HF](#) [CPDUR24V-HF](#) [CPDQC5V0U-HF](#) [CPDQC5V0USP-HF](#)
[CPDQC5V0-HF](#) [D1213A-01LP4-7B](#) [D1213A-02WL-7](#) [ESDLIN1524BJ-HQ](#) [5KP100A](#)