

Decade Divider, Single-In-Line Through Hole Thin Film Resistor Networks (Standard)



DESIGN SUPPORT TOOLS

click logo to get started



Using these integrated thin film networks instead of discrete resistor sets, designers gain several advantages: Smaller size, better overall tracking, greater reliability, and lower cost.

FEATURES

- Tight TCR tracking down to 2.5 ppm typical
- Low voltage coefficient < 0.02 ppm/V
- Low noise index < 30 dB
- 5 decades: 1 k Ω to 9 M Ω
- 6 decades: 100 Ω to 9 M Ω
- High stability 0.01 % on ratio (1000 h at Pn at +70 °C)
- Material categorization: for definitions of compliance please see <u>www.vishay.com/doc?99912</u>

ROHS COMPLIANT HALOGEN FREE

GREEN


(5-2008)

TYPICAL PERFORMANCE


	ABS	TRACKING
TCR	< 25 ppm/°C	< 2.5 ppm/°C
	ABS	RATIO
TOL.	0.1 %	0.03 %

SCHEMATIC



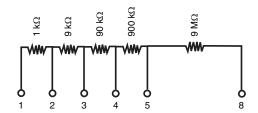

6 Decades

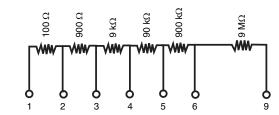

STANDARD ELECTRICAL SPECIFICATIONS								
MODEL	SIZE	$\begin{array}{c} \textbf{REISTANCE} \\ \textbf{RANGE} \\ \Omega \end{array}$	POWER RATING PER RESISTOR W	POWER RATING PER PACKAGE 0 °C TO 70 °C W	ABSOLUTE TOLERANCE 0 °C TO 70 °C ± %	RATIO TOLERANCE (2) ± %	ABSOLUTE TCR 0 °C TO 70 °C ppm/°C	RATIO TCR ⁽¹⁾ ppm/°C
CNS 471		100 to 10M	0.1	0.6	0.1	0.03, 0.05, 0.1	< 25	2.5 typical

Notes

- (1) Except for 100R (5 ppm/°C)
- (2) $A = \pm 0.05 \%$, $B = \pm 0.1 \%$, $C = \pm 0.03 \%$

PERFORMANCES			
TEST	SPECIFICATIONS	CONDITIONS	
Stability ∆R ratio	0.01 % typical	1000 h at +70 °C at Pn	
Voltage coefficient	< 0.02 ppm/V		
Working voltage	1200 V		
Operating temperature range	0 °C; +70 °C		
Storage temperature range	-55 °C to +155 °C		
Noise	< -30 dB typical		
Thermal EMF	0.1 μV/°C		
Shelf life stability (ratio)	50 ppm	1 year	

Revision: 02-Mar-18 Document Number: 60043


For technical questions, contact: sferthinfilm@vishay.com



Vishay Sfernice


DIMENSIONS








DIMENSION	INCHES	MILLIMETERS
Α	0.830	21.08 max.
В	0.261	6.62 max.
С	0.020	0.51
D	0.100	2.54
Е	0.125	3.17 min.
F	0.100	2.54 max.
G	0.010	0.25




D x 3



DIMENSION	INCHES	MILLIMETERS
Α	0.930	23.62 max.
В	0.261	6.62 max.
С	0.020	0.51
D	0.100	2.54
E	0.125	3.17 min.
F	0.100	2.54 max.
G	0.010	0.25

MECHANICAL SPECIFICATIONS		
Resistive material	Nichrome	
Coating	Fluidized epoxy	
Terminals	Tin / silver on copper alloy	
Substrate material	Alumina	
Marking resistance to solvents	Laser marking	

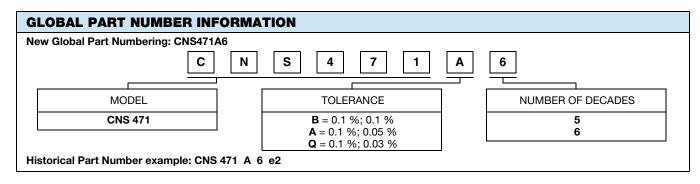



Legal Disclaimer Notice

Vishay

Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Resistor Networks & Arrays category:

Click to view products by Vishay manufacturer:

Other Similar products are found below:

 M8340105K1002FGD03
 M8340105K3301JCD03
 M8340106M2002GCD03
 M8340107K1471FGD03
 M8340107K2002GCD03

 M8340107K2261FGD03
 M8340107M1501GGD03
 M8340108K1001FCD03
 M8340108K3240FGD03
 M8340108K4991FGD03

 M8340108K6192FGD03
 M8340109K2872FCD03
 M8340109MA010GHD03
 EXB-24N121JX
 EXB-24N330JX
 EXB-24N470JX

 744C083101JTR
 EXB-U14360JX
 EXB-U18390JX
 744C083270JTR
 745C102472JP
 767161104G
 770101223
 ACAS06S0830339P100

 ACAS06S0830343P100
 ACAS06S0830344P100
 RM2012A-102/104-PBVW10
 RM2012A-102503-PBVW10
 8B472TR4
 268-15K

 ACAS06S0830341P100
 ACAS06S0830342P100
 ACAS06S0830345P100
 EXB-U14470JX
 EXB-U18330JX
 266-10K

 M8340102K1051FBD04
 M8340105M1001JCD03
 M8340106K4701GGD03
 M8340107K1004GGD03
 M8340108K1000GGD03

 M8340108K1202GGD03
 M8340108K3901GGD03
 M8340108K4992FGD03
 M8340108K5111FGD03
 M8340109K2202GCD03

 RKC8BD104J
 DFNA100-1TS
 745X101473JP
 RMKD408-10KBW