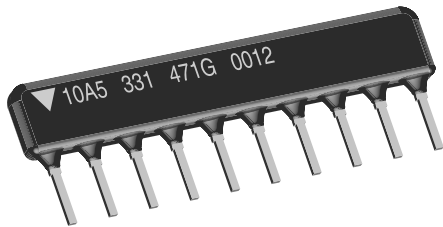


Thick Film Resistor Networks, Single-In-Line, Conformal Coated SIP



FEATURES

- Isolated, bussed and dual terminator schematics available
- Body height: “A” profile = 0.195" (4.95 mm) and “B” profile = 0.295" (7.50 mm) standard; custom “C” profile = 0.350" (8.89 mm) also available
- “A” profile standard in 4 thru 12 pins
- Thick film resistive elements
- Reduces total assembly costs
- Resistor elements protected by tough epoxy conformal coating
- Wide resistance range (10 Ω to 2.2 MΩ)
- Available in bulk pack as standard; optional tube pack is also available
- Meets EIA/ECA-CB23 rev. G whisker test requirements for class 1A products
- Material categorization: For definitions of compliance please see www.vishay.com/doc?99912


RoHS*
Available

Note

* This datasheet provides information about parts that are RoHS-compliant and/or parts that are non-RoHS-compliant. For example, parts with lead (Pb) terminations are not RoHS-compliant. Please see the information/tables in this datasheet for details.

| STANDARD ELECTRICAL SPECIFICATIONS | | | | | | | |
|------------------------------------|----------------|--|-----------------------|--|---------------------------------|--|--|
| GLOBAL MODEL/ SCHEMATIC | PACKAGE HEIGHT | POWER RATING ELEMENT ⁽¹⁾ <i>P</i> _{70 °C} W | RESISTANCE RANGE Ω | TEMPERATURE COEFFICIENT (- 55 °C to + 125 °C) ± ppm/°C | TOLERANCE ⁽²⁾ ± % | TEMP. COEFFICIENT TRACKING ⁽¹⁾ (- 55 °C to + 125 °C) ± ppm/°C | MAX. WORKING VOLTAGE ⁽³⁾ V _{DC} |
| CSCxxx01 | A | 0.20 | 10 to 50 | 250 | 1, 2, 5 | 50 | 100 |
| | | | 50.1 to 2.2M | 100 | | | |
| | B | 0.25 | 10 to 50 | 250 | | | |
| | | | 50.1 to 2.2M | 100 | | | |
| CSCxxx03 | A | 0.30 | 10 to 50 | 250 | 1, 2, 5 | 50 | 100 |
| | | | 50.1 to 2.2M | 100 | | | |
| | B | 0.40 | 10 to 50 | 250 | | | |
| | | | 50.1 to 2.2M | 100 | | | |
| CSCxxx05 | A | 0.20 | 10 to 50 | 250 | 1, 2, 5 | 150 | 100 |
| | | | 50.1 to 2.2M | 100 | | | |
| | B | 0.25 | 10 to 50 | 250 | | | |
| | | | 50.1 to 2.2M | 100 | | | |

Notes

- See derating curves for package power rating
- ⁽¹⁾ For resistor power ratings at + 25 °C see derating curves
- ⁽²⁾ ± 2 % standard, ± 1 % and ± 5 % available
- ⁽³⁾ Continuous working voltage shall be $\sqrt{P \times R}$ or maximum working voltage, whichever is less

GLOBAL PART NUMBER INFORMATION
New Global Part Numbering: CSC08A03100RGEK (preferred part number format)

| | | | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|--|--|--|
| C | S | C | 0 | 8 | A | 0 | 3 | 1 | 0 | 0 | R | G | E | K | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|--|--|--|

| GLOBAL MODEL | PIN COUNT | PACKAGE HEIGHT | SCHEMATIC | RESISTANCE VALUE | TOLERANCE CODE | PACKAGING | SPECIAL |
|--------------|---|------------------------------------|--|---|--|--|--|
| CSC | 04 to 12 pin available 04 = 4 pin 08 = 8 pin 12 = 12 pin | A = "A" profile B = "B" profile | 01 = Bussed 03 = Isolated 00 = Special | R = Ω K = k Ω M = M Ω 10R0 = 10 Ω 680K = 680 k Ω 1M00 = 1.0 M Ω 0000 = 0 Ω Jumper | F = $\pm 1\%$ G = $\pm 2\%$ J = $\pm 5\%$ S = Special Z = 0 Ω Jumper | EK = Lead (Pb)-free, bulk PA = Tin/lead, bulk | Blank = Standard (dash number) (up to 3 digits) From 1 to 999 as applicable |

Historical Part Number example: CSC08A03101GEK (will continue to be accepted)

| | | | | | | |
|------------------|-----------|----------------|-----------|------------------|----------------|-----------|
| CSC | 08 | A | 03 | 101 | G | EK |
| HISTORICAL MODEL | PIN COUNT | PACKAGE HEIGHT | SCHEMATIC | RESISTANCE VALUE | TOLERANCE CODE | PACKAGING |

New Global Part Numbering: CSC08A05131AGEK (preferred part number format)

| | | | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|--|--|--|
| C | S | C | 0 | 8 | A | 0 | 5 | 1 | 3 | 1 | A | G | E | K | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|--|--|--|

| GLOBAL MODEL | PIN COUNT | PACKAGE HEIGHT | SCHEMATIC | RESISTANCE VALUE | TOLERANCE CODE | PACKAGING | SPECIAL |
|--------------|---|------------------------------------|----------------------|--|---|--|--|
| CSC | 04 to 12 pin available 04 = 4 pin 08 = 8 pin 12 = 12 pin | A = "A" profile B = "B" profile | 05 = Dual terminator | 3 digit impedance code, followed by alpha modifier (see impedance table) | F = $\pm 1\%$ G = $\pm 2\%$ J = $\pm 5\%$ | EK = Lead (Pb)-free, bulk PA = Tin/lead, bulk | Blank = Standard (Dash Number) (Up to 3 digits) From 1 to 999 as applicable |

Historical Part Number example: CSC08A05131AGEK (will continue to be accepted)

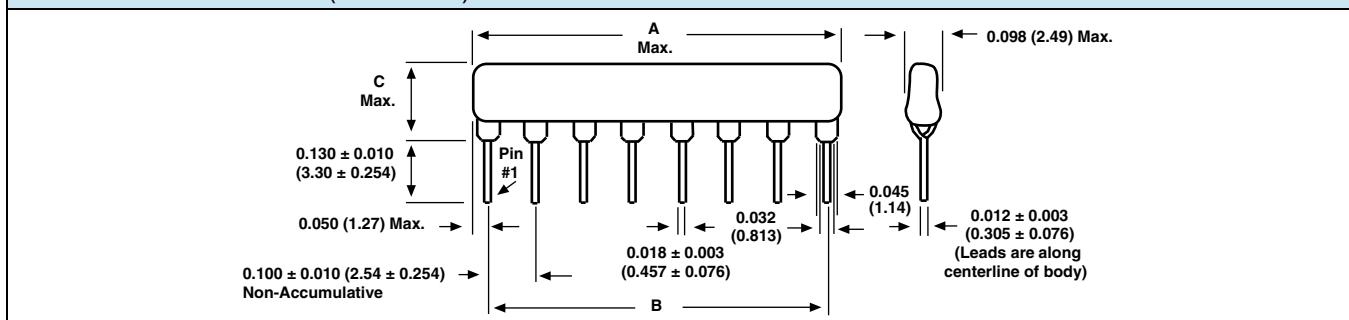
| | | | | | | | |
|------------------|-----------|----------------|-----------|--------------------|--------------------|----------------|-----------|
| CSC | 08 | A | 05 | 221 | 331 | G | EK |
| HISTORICAL MODEL | PIN COUNT | PACKAGE HEIGHT | SCHEMATIC | RESISTANCE VALUE 1 | RESISTANCE VALUE 2 | TOLERANCE CODE | PACKAGING |

Note

- For additional information on packaging, refer to the Through-Hole Network Packaging document (www.vishay.com/doc?31542).

TECHNICAL SPECIFICATIONS

| PARAMETER | UNIT | CSC SERIES |
|-------------------------------------|-------------|------------------|
| Voltage coefficient of resistance | V_{eff} | < 50 ppm typical |
| Dielectric strength | V_{AC} | 200 |
| Isolation resistance (03 schematic) | Ω | > 100M |
| Operating temperature range | $^{\circ}C$ | - 55 to + 125 |

DIMENSIONS in inches (millimeters)


| 01 SCHEMATIC | GLOBAL MODEL | NUMBER OF RESISTORS | A (MAX.) | B | C (MAX.) |
|--------------|--------------|---------------------|---------------------|---------------|--|
| | CSC04 | 3 | 0.390 (9.91) | 0.300 (7.62) | "A" profile = 0.195 (4.95) "B" profile = 0.295 (7.50) |
| | CSC05 | 4 | 0.490 (12.45) | 0.400 (10.16) | |
| | CSC06 | 5 | 0.590 (14.99) | 0.500 (12.70) | |
| | CSC07 | 6 | 0.690 (17.53) | 0.600 (15.24) | |
| | CSC08 | 7 | 0.790 (20.07) | 0.700 (17.78) | |
| | CSC09 | 8 | 0.890 (22.61) | 0.800 (20.32) | |
| | CSC10 | 9 | 0.990 (25.15) | 0.900 (22.86) | |
| | CSC11 | 10 | 1.09 (27.69) | 1.00 (25.40) | |
| | CSC12 | 11 | 1.19 (30.23) | 1.100 (27.94) | |
| | 03 SCHEMATIC | GLOBAL MODEL | NUMBER OF RESISTORS | A (MAX.) | |
| | CSC04 | 2 | 0.390 (9.91) | 0.300 (7.62) | "A" profile = 0.195 (4.95) "B" profile = 0.295 (7.50) |
| | CSC06 | 3 | 0.590 (14.99) | 0.500 (12.70) | |
| | CSC08 | 4 | 0.790 (20.07) | 0.700 (17.78) | |
| | CSC10 | 5 | 0.990 (25.15) | 0.900 (22.86) | |
| | CSC12 | 6 | 1.19 (30.23) | 1.100 (27.94) | |
| | 05 SCHEMATIC | GLOBAL MODEL | NUMBER OF RESISTORS | A (MAX.) | |
| | CSC04 | 4 | 0.390 (9.91) | 0.300 (7.62) | "A" profile = 0.195 (4.95) "B" profile = 0.295 (7.50) |
| | CSC05 | 6 | 0.490 (12.45) | 0.400 (10.16) | |
| | CSC06 | 8 | 0.590 (14.99) | 0.500 (12.70) | |
| | CSC07 | 10 | 0.690 (17.53) | 0.600 (15.24) | |
| | CSC08 | 12 | 0.790 (20.07) | 0.700 (17.78) | |
| | CSC09 | 14 | 0.890 (22.61) | 0.800 (20.32) | |
| | CSC10 | 16 | 0.990 (25.15) | 0.900 (22.86) | |
| | CSC11 | 18 | 1.09 (27.69) | 1.00 (25.40) | |
| | CSC12 | 20 | 1.19 (30.23) | 1.100 (27.94) | |

| MECHANICAL SPECIFICATIONS | |
|--------------------------------|--|
| Marking resistance to solvents | Permanency testing per MIL-STD-202, method 215 |
| Solderability | Per MIL-STD-202, method 208E, RMA flux |
| Body | High alumina, epoxy coated |
| Terminals ⁽¹⁾ | Solder plated leads |

Note

⁽¹⁾ Coating meniscus meets class 2 requirements of IPC-A-610.

STOCKED RESISTANCE VALUES IN Ω ("G" TOLERANCE)

Standard E-24 resistance values stocked. Consult factory.

Many dual terminator resistance values stocked. Consult factory.

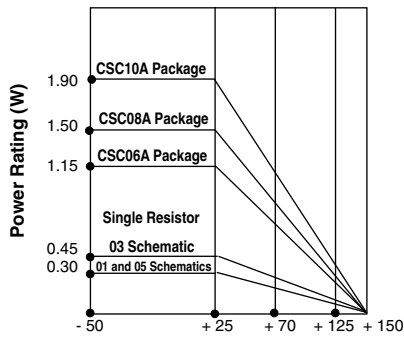
| IMPEDANCE CODES | | | | | |
|-----------------|--------------------|--------------------|------|--------------------|--------------------|
| CODE | R ₁ (Ω) | R ₂ (Ω) | CODE | R ₁ (Ω) | R ₂ (Ω) |
| 500B | 82 | 130 | 141A | 270 | 270 |
| 750B | 120 | 200 | 181A | 330 | 390 |
| 800C | 130 | 210 | 191A | 330 | 470 |
| 990A | 160 | 260 | 221B | 330 | 680 |
| 101C | 180 | 240 | 281B | 560 | 560 |
| 111C | 180 | 270 | 381B | 560 | 1.2K |
| 121B | 180 | 390 | 501C | 620 | 2.7K |
| 121C | 220 | 270 | 102A | 1.5K | 3.3K |
| 131A | 220 | 330 | 202B | 3K | 6.2K |

Note

- For additional impedance codes, refer to the Dual Terminator Impedance Code Table document (www.vishay.com/doc?31530).



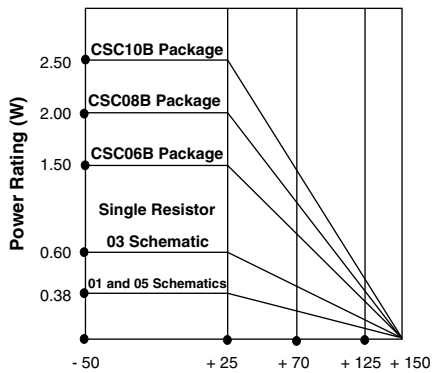
"A" Profile



Derating Ambient Temperature °C


| "A" PROFILE + 70 °C PACKAGE RATINGS | |
|-------------------------------------|--------|
| CSC12A | 1.5 W |
| CSC11A | 1.37 W |
| CSC10A | 1.25 W |
| CSC09A | 1.12 W |
| CSC08A | 1.00 W |
| CSC07A | 0.87 W |
| CSC06A | 0.75 W |
| CSC05A | 0.62 W |
| CSC04A | 0.40 W |

"B" Profile



Derating Ambient Temperature °C


| "B" PROFILE + 70 °C PACKAGE RATINGS | |
|-------------------------------------|--------|
| CSC12B | 1.90 W |
| CSC11B | 1.75 W |
| CSC10B | 1.60 W |
| CSC09B | 1.45 W |
| CSC08B | 1.30 W |
| CSC07B | 1.15 W |
| CSC06B | 1.00 W |
| CSC05B | 0.80 W |
| CSC04B | 0.60 W |

CIRCUIT APPLICATIONS
01 Schematic

Bussed

The CSCxxx01 single-in-line resistor networks provide the user with nominally equal resistors, each connected to a common pin (pin no. 1). Commonly used in the following applications:

- “Wired OR” pull-up
- Power gate pull-up
- MOS/ROM pull-up/pull-down
- Open collector pull-up
- TTL input pull-down
- TTL unused gate pull-up

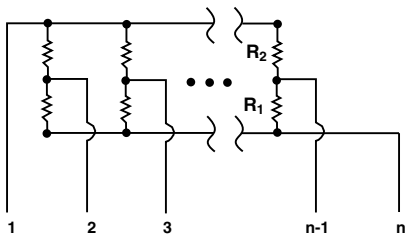
* “A” profile standard, “B” profile available.

03 Schematic

Isolated

The CSCxxx03 single-in-line resistor networks provide the user with nominally equal resistors. Each resistor is isolated from all others. Commonly used in the following applications:

- “Wired OR” pull-up
- Power driven pull-up
- Power gate pull-up
- Line termination
- Long-line impedance balancing
- LED current limiting
- ECL output pull-down
- TTL input pull-down

* “A” Profile standard, “B” profile available.

05 Schematic

Dual Terminator

The CSCxxx05 circuits contain series pairs of resistors. Each series pair is connected between two common lines. The junction of these resistor pairs is connected to the input terminals. The 05 circuits are designed for TTL dual-line termination and pulse squaring.

* “A” profile standard, “B” profile available.

PERFORMANCE

| TEST | CONDITIONS | MAX. ΔR (TYPICAL TEST LOTS) |
|---------------------------------|--|-------------------------------------|
| Thermal shock | 5 cycles between - 65 °C and + 125 °C | $\pm 0.50 \% \Delta R$ |
| Short time overload | 2.5 x rated working voltage, 5 s | $\pm 0.25 \% \Delta R$ |
| Low temperature operation | 45 min at full rated working voltage at - 65 °C | $\pm 0.25 \% \Delta R$ |
| Moisture resistance | 240 h with humidity ranging from 80 % RH to 98 % RH | $\pm 1.00 \% \Delta R$ |
| Resistance to soldering heat | Leads immersed in + 350 °C solder to within 1/16" of body for 3 s | $\pm 0.25 \% \Delta R$ |
| Shock | Total of 18 shocks at 100 g's | $\pm 0.25 \% \Delta R$ |
| Vibration | 12 h at maximum of 20 g's between 10 Hz and 2000 Hz | $\pm 0.25 \% \Delta R$ |
| Load life | 1000 h at + 70 °C, rated power applied 1.5 h “ON”, 0.5 h “OFF” for full 1000 h period. Derated according to the curve. | $\pm 1.00 \% \Delta R$ |
| Terminal strength | 4.5 pound pull for 30 s | $\pm 0.25 \% \Delta R$ |
| Insulation resistance | 10 000 M Ω (minimum) | - |
| Dielectric withstanding voltage | No evidence of arcing or damage (200 V _{RMS} for 1 min) | - |



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Other Tools](#) category:

Click to view products by [Vishay](#) manufacturer:

Other Similar products are found below :

[CR-05FL7--150R](#) [CR-05FL7--698K](#) [899-2-KT46](#) [899-5-KT46](#) [CR-0AFL4--332K](#) [CR-12FP4--260R](#) [CRCW04021100FRT7](#)
[CRCW04021961FRT7](#) [5800-0090](#) [CRCW04024021FRT7](#) [CRCW040254R9FRT7](#) [CRCW0603102JRT5](#) [59065-5](#) [00-8273-RDPP](#) [00-8729-](#)
[WHPP](#) [593033](#) [593058](#) [593072](#) [593564100](#) [593575](#) [593591](#) [593593](#) [011349-000](#) [LTLA506SBLAMNBL](#) [CRCW08052740FRT1](#) [LUC-](#)
[012S070DSM](#) [LUC-018S070DSP](#) [599-2021-3-NME](#) [599-JJ-2021-03](#) [00-5080-YWPP](#) [5E4750/01-20R0-T/R](#) [LW1A-L1-GL](#) [LW1A-P1-GD](#)
[LW1L-A1C10V-GL](#) [LW1L-M1C70-A](#) [0202-0173](#) [00-9089-RDPP](#) [00-9300-RDPP](#) [CRCW2010331JR02](#) [01-1003W-8/32-10](#) [601-GP-08-](#)
[KT39](#) [601-JJ-06](#) [601-SPB](#) [601YSY](#) [602-JJ-03](#) [602SPB](#) [602Z](#) [603-JJ-07-FP](#) [603-JJY-04](#) [604J](#)