


Wirewound Resistors, Military, MIL-PRF-26 Qualified, Type RW, Precision Power, Silicone Coated



FEATURES

- From 1.4 to 4 times higher power ratings than conventional resistors of equivalent size
- High temperature coating
- Complete welded construction
- Meets applicable requirements of MIL-PRF-26
- Available in non-inductive styles (type GN) with Aryton-Perry winding for lowest reactive components
- Excellent stability in operation
- Lead (Pb)-Free version is RoHS Compliant

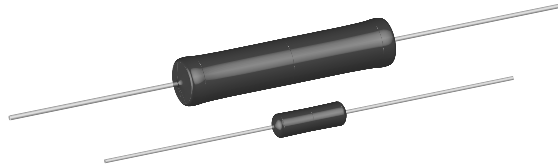

RoHS*
COMPLIANT

STANDARD ELECTRICAL SPECIFICATIONS

GLOBAL MODEL	HISTORICAL MODEL	MIL-PRF-26 TYPE	POWER RATING** P _{25°C} W		RESISTANCE RANGE MIL. RANGE SHOWN IN BOLD FACE Ω				WEIGHT (Typical) g
			U ± 0.05 % thru ± 5 %	V ± 3 % & ± 5 %	± 0.05 %	± 0.1 %	± 0.25 %	± 0.5 %, ± 1 % ± 3 %, ± 5 %	
G001...80	G-1-80	—	1.0	—	1.0 - 1k	0.499 - 1k	0.499 - 3.4k	0.1 - 3.4k	0.20
G001...380	G-1-380	RW81	1.0	—	—	0.499 - 1k	0.499 - 1k	0.1 - 1k	0.20
G002	G-2	—	1.5	—	1.0 - 1.3k	0.499 - 1.3k	0.499 - 4.9k	0.1 - 4.9k	0.21
G003...80	G-3-80	—	2.0	—	1.0 - 2.74k	0.499 - 2.74k	0.499 - 10.4k	0.1 - 10.4k	0.34
G003...380	G-3-380	RW80	2.0	—	—	0.499 - 2.74k	0.499 - 2.74k	0.1 - 2.74k	0.34
G005	G-5	—	4.0	5.0	0.499 - 6.5k	0.499 - 6.5k	0.1 - 24.5k	0.1 - 24.5k	0.80
G05C	G-5C	—	5.0	7.0	0.499 - 8.6k	0.499 - 8.6k	0.1 - 32.3k	0.1 - 32.3k	1.20
G010	G-10	—	7.0	10.0	0.499 - 25.7k	0.499 - 25.7k	0.1 - 95.2k	0.1 - 95.2k	3.60

**Vishay Dale G models have two power ratings, depending on operation temperature and stability requirements.
NOTE: Shaded area indicates most popular models.

TECHNICAL SPECIFICATIONS

PARAMETER	UNIT	G RESISTOR CHARACTERISTICS
Temperature Coefficient	ppm/°C	± 90 for below 1 Ω, ± 50 for 1 Ω to 9.9 Ω, ± 20 for 10 Ω and above
Dielectric Withstanding Voltage	V _{AC}	500 minimum for G-1-80 thru G-3-380, 1000 minimum for all others
Short Time Overload	—	5 x rated power for 5 seconds for G-1-80 thru G-5C (Characteristic U), 10 x rated power for 5 seconds for G-10
Maximum Working Voltage	V	(P x R) ^{1/2}
Insulation Resistance	Ω	1000 Megohm minimum dry, 100 Megohm minimum after moisture test
Terminal Strength	lb	5 minimum for G-1-80 thru G-3-380, 10 minimum for all others
Solderability	—	MIL-PRF-26 type - Meets requirements of ANSI J-STD-002 Non Mil type - Terminals are 60/40 electro tin plated to facilitate soldering
Operating Temperature Range	°C	Characteristic U = - 65/+ 250, Characteristic V = - 65/+ 350
Power Rating	—	Characteristic U - + 250 °C max. hot spot temperature, ± 0.5 % max. ΔR in 2000 hr. load life Characteristic V - + 350 °C max. hot spot temperature, ± 3.0 % max. ΔR in 2000 hr. load life

GLOBAL PART NUMBER INFORMATION

New Global Part Numbering: G00310R00FS7080 (preferred part numbering format)

G 0 0 3 1 0 R 0 0 F S 7 0 8 0

GLOBAL MODEL	RESISTANCE VALUE	TOLERANCE CODE	PACKAGING	SPECIAL
G003	R = Decimal K = Thousand 15R00 = 15 Ω 10K00 = 10K Ω	A = ± 0.05 % B = ± 0.1 % C = ± 0.25 % D = ± 0.5 % F = ± 1.0 % J = ± 5.0 % K = 10.0 %	E70 = Lead (Pb)-Free, Tape/Reel (smaller than G010) E73 = Lead (Pb)-Free, Tape/Reel (G010 & larger) E12 = Lead (Pb)-Free, Bulk Lead (Pb)-Free is not available on RW military type S70 = Tin/Lead, Tape/Reel (smaller than G010) S73 = Tin/Lead, Tape/Reel (G010 & larger) B12 = Tin/Lead, Bulk	(Dash Number) (up to 3 digits) From 1-999 as applicable

Historical Part Number example: G-3-80 10 Ω 1 % S70 (will continue to be accepted)

G-3-80	10 Ω	1 %	S70
HISTORICAL MODEL	RESISTANCE VALUE	TOLERANCE CODE	PACKAGING


* Pb containing terminations are not RoHS compliant, exemptions may apply



Wirewound Resistors, Military, MIL-PRF-26 Qualified,
Type RW, Precision Power, Silicone Coated

Vishay Dale

DIMENSIONS

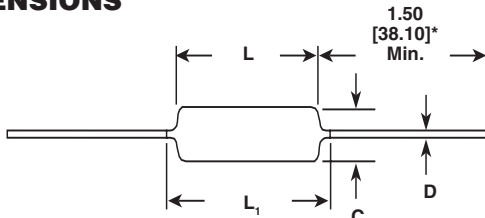

*On some standard reel pack methods, the leads may be trimmed to a shorter length than shown.

MATERIAL SPECIFICATIONS

Element: Copper-nickel alloy or nickel-chrome alloy, depending on resistance value

Core: Ceramic, Beryllium oxide or alumina, depending on resistor model

Coating: Special high temperature silicone


Standard Terminals: 100 % Sn, or 60/40 Sn/Pb coated Copperweld®.

NOTE: Military (RW) parts are only available with 60/40 Sn/Pb finish.

End Caps: Stainless steel

Part Marking: DALE, Model, Wattage*, Value, Tolerance, Date Code

*Wattage marked on part will be "U" characteristic

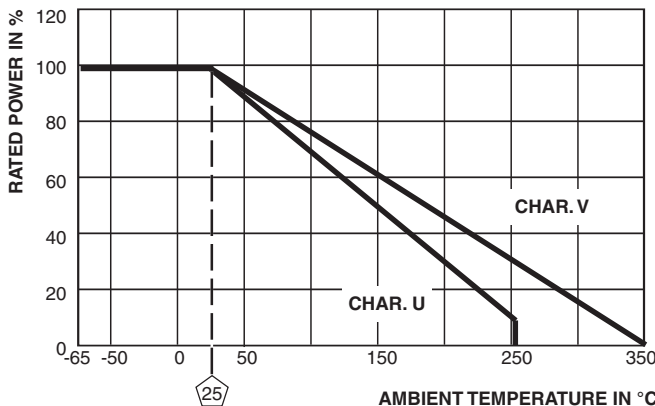

Derating

PERFORMANCE		
TEST	CONDITIONS OF TEST	TEST LIMITS (CHARACTERISTIC U)
Thermal Shock	Rated power applied until thermally stable, then a minimum of 15 minutes at - 55 °C	± (0.2 % + 0.05 Ω) ΔR
Short Time Overload	5 x power (G-1-80 thru G-5C), 10 x power (G-10) for 5 seconds	± (0.2 % + 0.05 Ω) ΔR
Dielectric Withstanding Voltage	1000 V rms, one minute	± (0.1 % + 0.05 Ω) ΔR
Low Temperature Storage	- 65 °C for 24 hours	± (0.2 % + 0.05 Ω) ΔR
High Temperature Exposure	250 hours at + 250° (Characteristic U)	± (0.5 % + 0.05 Ω) ΔR
Moisture Resistance	MIL-STD-202 Method 106, 7b not applicable	± (0.2 % + 0.05 Ω) ΔR
Shock, Specified Pulse	MIL-STD-202 Method 213, 100g's for 6 milliseconds, 10 shocks	± (0.1 % + 0.05 Ω) ΔR
Vibration, High Frequency	Frequency varied 10 to 2000 Hz, 20g peak, 2 directions 6 hours each	± (0.1 % + 0.05 Ω) ΔR
Load Life	2000 hours at rated power, + 25 °C, 1.5 hours "ON", 0.5 hours "OFF"	± (0.5 % + 0.05 Ω) ΔR
Terminal Strength	5 to 10 sec., 5 or 10 lb pull test (depending on size), torsion test - 3 alternating directions, 360 °C each	± (0.1 % + 0.05 Ω) ΔR

MODEL	DIMENSIONS in inches [millimeters]			
	L	L ₁ (Max.)**	C	D
G-1-80 G-1-380	0.250 ± 0.031 [6.35 ± 0.787]	0.281 [7.14]	0.085 ± 0.020 [2.16 ± 0.508]	0.020 ± 0.002 [0.508 ± 0.051]
G-2	0.312 ± 0.016 [7.92 ± 0.406]	0.328 [8.33]	0.078 + 0.016 - 0.031 [1.98 + 0.406 - 0.787]	0.020 ± 0.002 [0.508 ± 0.051]
G-3-80 G-3-380	0.406 ± 0.031 [10.31 ± 0.787]	0.437 [11.10]	0.094 ± 0.031 [2.39 ± 0.787]	0.020 ± 0.002 [0.508 ± 0.051]
G-5	0.562 ± 0.062 [14.27 ± 1.57]	0.622 [15.80]	0.188 ± 0.032 [4.78 ± 0.813]	0.032 ± 0.002 [0.813 ± 0.051]
G-5C	0.500 ± 0.062 [12.70 ± 1.57]	0.593 [15.06]	0.218 ± 0.032 [5.54 ± 0.813]	0.040 ± 0.002 [1.02 ± 0.051]
G-10	0.875 ± 0.062 [22.23 ± 1.57]	1.0 [25.4]	0.312 ± 0.032 [7.92 ± 0.813]	0.040 ± 0.002 [1.02 ± 0.051]

**L₁ (Max.) dimension is clean lead to clean lead.

GN NON-INDUCTIVE

Models of equivalent physical and electrical specifications are available with non-inductive (Aryton-Perry) winding. They are identified by inserting the letter N after G in the model number (GN-5, for example). Two conditions apply:

1. For GN models, divide maximum resistance values by two
2. Body O.D. on GN-5C may exceed that of the G-5C by 0.010"

TERMINATION

When G resistors will be operated at full rated power, resistance welding or high temperature solder are the recommended termination methods. Termination should be made within 1/2 inch from end of resistor body.



Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Wirewound Resistors - Through Hole](#) category:

Click to view products by [Vishay](#) manufacturer:

Other Similar products are found below :

[75822-2K4](#) [90J56R](#) [PW10-39R-5%](#) [ALSR1-20](#) [EP3WS47RJ](#) [RWR81S1000BRB12](#) [RWR81S12R4FRB12](#) [RWR81SR511FRB12](#)
[RWR81SR619FRBSL](#) [RWR89S10R0FRB12](#) [RWR89S9310FPB12](#) [27J1K0](#) [93J62RE](#) [AC10000002208JAB00](#) [1HJ-25](#) [FSQ5WR47J](#)
[FW10A33R0JA](#) [25J39K](#) [25J5R0-B](#) [25W1D0](#) [272-303-JBW](#) [280-PRM5-150-RC](#) [CP0005270R0JE1491](#) [CPCC0510R00JE32](#)
[CPCC051R000JB31](#) [CPW052K500JE143](#) [CPW05700R0JE143](#) [C1010RJL](#) [CA000210R00JE14](#) [VPR5F1500](#) [RS02B887R0FE73](#)
[RWR74SR604FRB12](#) [RWR84S1001FRB12](#) [RWR84S20R0FSBSL](#) [RWR89S6190FSB12](#) [CPW055R000JB143](#) [ULW5-39R0JT075](#) [W31-](#)
[R047JA1](#) [VP25K-120](#) [VC3D900](#) [ULW5-68RJT075](#) [65888-3R3](#) [CB5JB10R0](#) [CPW151K500JE313](#) [RWR80N3400FSB12](#)
[RWR81S1000FRB12](#) [RWR81S1000FSB12](#) [RWR89S6R81FRB12](#) [RWR89N30R1FRB12](#) [RWR81S4R99FPB12](#)