



Surface Mount Multilayer Ceramic Chip Capacitor Solutions for High Voltage Applications



FEATURES

- Excellent reliability and thermal shock performance
- High voltage breakdown compared to standard design
- High reliable serial electrode design
- Protective surface coating may be required to prevent surface arcing
- Polymer termination available for intensive, board flex requirements
- Wet build process
- Reliable Noble Metal Electrode (NME) system
- Material categorization: for definitions of compliance please see www.vishay.com/doc?99912



RoHS
COMPLIANT
HALOGEN
FREE
GREEN
(5-2008)

APPLICATIONS

- Input filter capacitors
- Output filter capacitors
- Snubber capacitors reduce MOSFET voltage spikes
- Filtering for switching power supplies
- For lighting and other AC applications please contact: mlcc@vishay.com

ELECTRICAL SPECIFICATIONS

COG (NP0)
<p>GENERAL SPECIFICATION</p> <p>Note Electrical characteristics at +25 °C unless otherwise specified</p> <p>Operating Temperature: -55 °C to +125 °C</p> <p>Capacitance Range: 10 pF to 3.3 nF</p> <p>Voltage Range: 3000 V_{DC}, 4000 V_{DC}, 5000 V_{DC}</p> <p>Temperature Coefficient of Capacitance (TCC): 0 ppm/°C ± 30 ppm/°C from -55 °C to +125 °C</p> <p>Dissipation Factor (DF): 0.1 % maximum at 1.0 V_{RMS} and 1 MHz for value ≤ 1000 pF 0.1 % maximum at 1.0 V_{RMS} and 1 kHz for values > 1000 pF</p> <p>Insulating Resistance: at +25 °C 100 000 MΩ min. or 1000 ΩF whichever is less at +125 °C 10 000 MΩ min. or 100 ΩF whichever is less</p> <p>Aging Rate: 0 % maximum per decade</p> <p>Dielectric Strength Test: applied test voltages 3000 V_{DC}- / 4000 V_{DC}- / 5000 V_{DC}-rated: 120 % of rated voltage</p>

X7R
<p>GENERAL SPECIFICATION</p> <p>Note Electrical characteristics at +25 °C unless otherwise specified</p> <p>Operating Temperature: -55 °C to +125 °C</p> <p>Capacitance Range: 150 pF to 15 nF</p> <p>Voltage Range: 3000 V_{DC}, 4000 V_{DC}, 5000 V_{DC}, 6000 V_{DC}</p> <p>Temperature Coefficient of Capacitance (TCC): ± 15 % from -55 °C to +125 °C, with 0 V_{DC} applied</p> <p>Dissipation Factor (DF): 2.5 % maximum at 1.0 V_{RMS} and 1 kHz</p> <p>Insulating Resistance: at +25 °C 100 000 MΩ min. or 1000 ΩF whichever is less at +125 °C 10 000 MΩ min. or 100 ΩF whichever is less</p> <p>Aging Rate: 1 % maximum per decade</p> <p>Dielectric Strength Test: applied test voltages 3000 V_{DC}- / 4000 V_{DC}- / 5000 V_{DC}- / 6000 V_{DC}-rated: min. 120 % of rated voltage</p>



QUICK REFERENCE DATA				
DIELECTRIC	CASE	MAXIMUM VOLTAGE (V)	CAPACITANCE	
			MINIMUM	MAXIMUM
C0G (NP0)	1812	5000	15 pF	1.0 nF
	1825	5000	33 pF	2.2 nF
	2220	5000	33 pF	2.2 nF
	2225	5000	47 pF	3.3 nF
X7R	1812	6000	150 pF	3.9 nF
	1825	6000	470 pF	10 nF
	2220	6000	470 pF	10 nF
	2225	6000	470 pF	15 nF

Note

- Detail ratings see “Selection Chart”


ORDERING INFORMATION								
HV2220	Y	152	K	X	M	A	T	HV ⁽²⁾
CASE CODE	DIELECTRIC	CAPACITANCE NOMINAL CODE	CAPACITANCE TOLERANCE	TERMINATION	DC VOLTAGE RATING ⁽¹⁾	MARKING	PACKAGING	PROCESS CODE
1812 1825 2220 2225	Y = X7R A = C0G (NP0)	Expressed in picofarads (pF). The first two digits are significant, the third is a multiplier. Examples 152 = 1500 pF	C0G (NP0): F = ± 1 % G = ± 2 % J = ± 5 % K = ± 10 % X7R: J = ± 5 % K = ± 10 % M = ± 20 %	X = Ni barrier 100 % tin plated matte finish B = polymer 100 % tin plated matte finish	H = 3000 V V = 4000 V M = 5000 V 6 = 6000 V	A = unmarked	T = 7" reel / plastic tape R = 11 1/4" / 13" reel / plastic tape	HV = high voltage

Notes

- (1) DC voltage rating should not be exceeded in application. Other application factors may affect the MLCC performance. Consult for questions: mlcc@vishay.com
- (2) Process code with 2 digits has to be added

ENVIRONMENTAL STATUS			
TERMINATION CODE	TERMINATION DESCRIPTION	RoHS COMPLIANT	VISHAY GREEN
X	Ni barrier 100 % tin plated matte finish	Yes	Yes
B	Polymer layer, 100 % tin plated matte finish	Yes	Yes

DIMENSIONS in inches (millimeters)

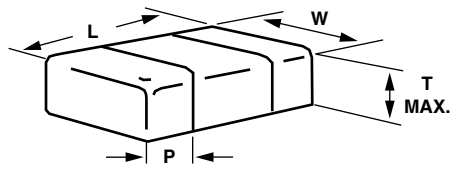

CASE CODE	STYLE	LENGTH (L)	WIDTH (W)	MAXIMUM THICKNESS (T)	TERMINATION PAD (P)	
					MINIMUM	MAXIMUM
1812	HV1812	0.177 ± 0.012 (4.50 ± 0.30)	0.126 ± 0.008 (3.20 ± 0.20)	0.106 (2.70)	0.010 (0.25)	0.035 (0.90)
1825	HV1825	0.177 ± 0.012 (4.50 ± 0.30)	0.252 ± 0.010 (6.40 ± 0.25)	0.106 (2.70)	0.010 (0.25)	0.035 (0.90)
2220	HV2220	0.220 ± 0.010 (5.59 ± 0.25)	0.200 ± 0.010 (5.08 ± 0.25)	0.106 (2.70)	0.010 (0.25)	0.037 (0.95)
2225	HV2225	0.220 ± 0.010 (5.59 ± 0.25)	0.250 ± 0.010 (6.35 ± 0.25)	0.106 (2.70)	0.010 (0.25)	0.037 (0.95)

Note

- Polymer layer (B termination) have increased dimensions: length 0.006" (0.15 mm)



SELECTION CHART																
DIELECTRIC		C0G (NP0)														
STYLE		HV1812 ⁽¹⁾			HV1825 ⁽¹⁾			HV2220 ⁽¹⁾			HV2225 ⁽¹⁾					
EIA CODE		1812			1825			2220			2225					
VOLTAGE (V _{DC})		3000	4000	5000		3000	4000	5000		3000	4000	5000		3000	4000	5000
VOLTAGE CODE		H	V	M		H	V	M		H	V	M		H	V	M
CAP. CODE	CAP.															
100	10 pF															
120	12 pF															
150	15 pF	•	•	•												
180	18 pF	•	•	•												
220	22 pF	•	•	•												
270	27 pF	•	•	•												
330	33 pF	•	•	•		•	•	•		•	•	•				
390	39 pF	•	•	•		•	•	•		•	•	•				
470	47 pF	•	•	•		•	•	•		•	•	•		•	•	•
560	56 pF	•	•	•		•	•	•		•	•	•		•	•	•
680	68 pF	•	•	•		•	•	•		•	•	•		•	•	•
820	82 pF	•	•	•		•	•	•		•	•	•		•	•	•
101	100 pF	•	•	•		•	•	•		•	•	•		•	•	•
121	120 pF	•	•	•		•	•	•		•	•	•		•	•	•
151	150 pF	•	•	•		•	•	•		•	•	•		•	•	•
181	180 pF	•	•	•		•	•	•		•	•	•		•	•	•
221	220 pF	•	•	•		•	•	•		•	•	•		•	•	•
271	270 pF	•	•			•	•	•		•	•	•		•	•	•
331	330 pF	•				•	•	•		•	•	•		•	•	•
391	390 pF	•				•	•	•		•	•	•		•	•	•
471	470 pF	•				•	•	•		•	•	•		•	•	•
561	560 pF	•				•	•	•		•	•	•		•	•	•
681	680 pF	•				•	•			•	•			•	•	•
821	820 pF	•				•				•				•	•	•
102	1.0 nF	•				•				•				•	•	
122	1.2 nF					•				•				•		
152	1.5 nF					•				•				•		
182	1.8 nF					•				•				•		
222	2.2 nF					•				•				•		
272	2.7 nF													•		
332	3.3 nF													•		
392	3.9 nF															
472	4.7 nF															

Notes

- (1) See soldering recommendations within this data book, or visit: www.vishay.com/doc?45034
- (2) Rating use lower packaging quantity, see "Standard Packaging Quantities" chart







SELECTION CHART																	
DIELECTRIC		X7R															
STYLE		HV1812 ⁽¹⁾				HV1825 ⁽¹⁾				HV2220 ⁽¹⁾				HV2225 ⁽¹⁾			
EIA CODE		1812				1825				2220				2225			
VOLTAGE (V _{DC})		3000	4000	5000	6000	3000	4000	5000	6000	3000	4000	5000	6000	3000	4000	5000	6000
VOLTAGE CODE		H	V	M	6	H	V	M	6	H	V	M	6	H	V	M	6
CAP. CODE	CAP.																
101	100 pF																
121	120 pF																
151	150 pF				•												
181	180 pF			•	•												
221	220 pF		•	•	•												
271	270 pF		•	•	•												
331	330 pF		•	•			•	•									
391	390 pF		•	•			•	•				•					
471	470 pF		•	•			•	•	•		•	•	•			•	•
561	560 pF	•	•	•			•	•	•		•	•	•			•	•
681	680 pF	•	•	•			•	•	•		•	•	•		•	•	•
751	750 pF								•				•				•
821	820 pF	•	•	•			•	•	•		•	•	•		•	•	•
102	1.0 nF	•	•				•	•	•		•	•	•		•	•	•
122	1.2 nF	•	•			•	•	•	•	•	•	•	•		•	•	•
152	1.5 nF	•	• ⁽²⁾			•	•	•	•	•	•	•	•		•	•	•
182	1.8 nF	•				•	•	•		•	•	•	•	•	•	•	•
222	2.2 nF	•				•	•			•	•		•	•	•	•	•
272	2.7 nF	• ⁽²⁾				•	•			•	•			•	•	•	•
332	3.3 nF	• ⁽²⁾				•	•			•	•			•	•	•	
392	3.9 nF	• ⁽²⁾				•				•				•	•		
472	4.7 nF					•				•				•	•		
562	5.6 nF					• ⁽²⁾				• ⁽²⁾				•	•		
682	6.8 nF					• ⁽²⁾				• ⁽²⁾				•			
822	8.2 nF					• ⁽²⁾				• ⁽²⁾				•			
103	10 nF					• ⁽²⁾				• ⁽²⁾				•			
123	12 nF													•			
153	15 nF													•			
183	18 nF																

Notes

- (1) See soldering recommendations within this data book, or visit: www.vishay.com/doc?45034
- (2) Rating use lower packaging quantity, see "Standard Packaging Quantities" chart









COG (NP0) DIELECTRIC - TYPICAL PARAMETERS

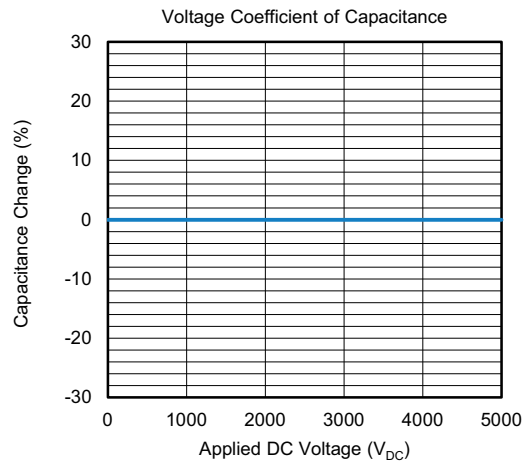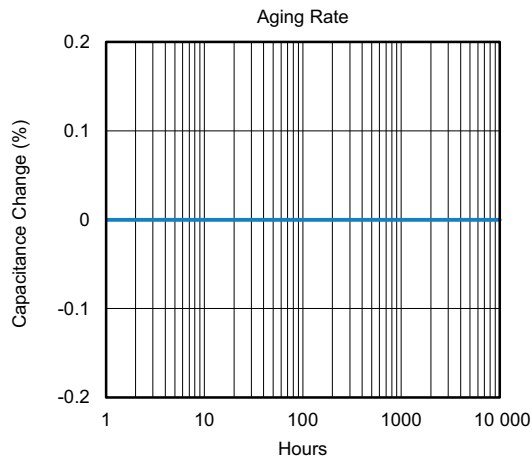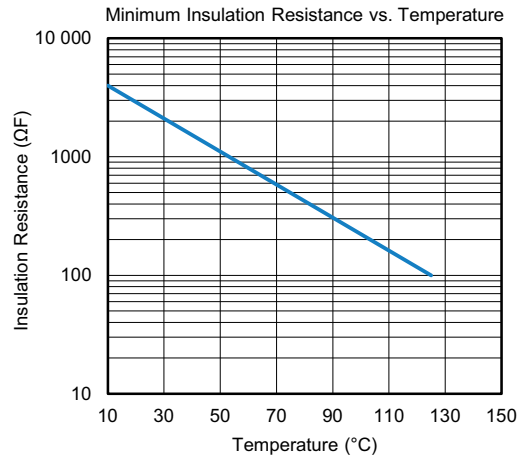
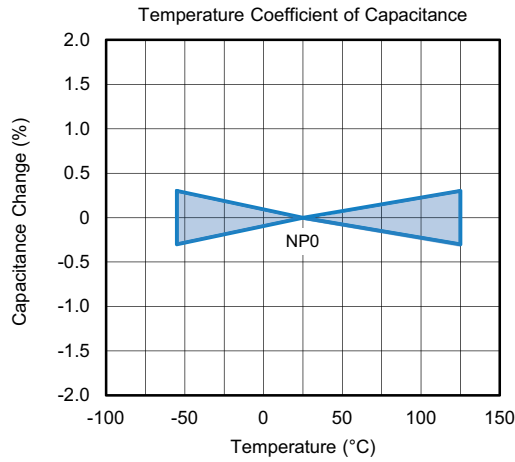




X7R DIELECTRIC - TYPICAL PARAMETERS

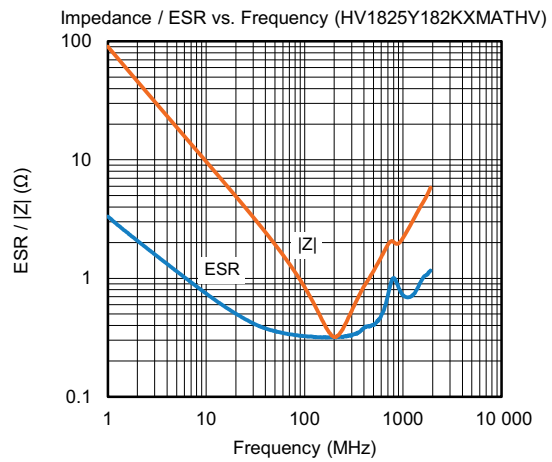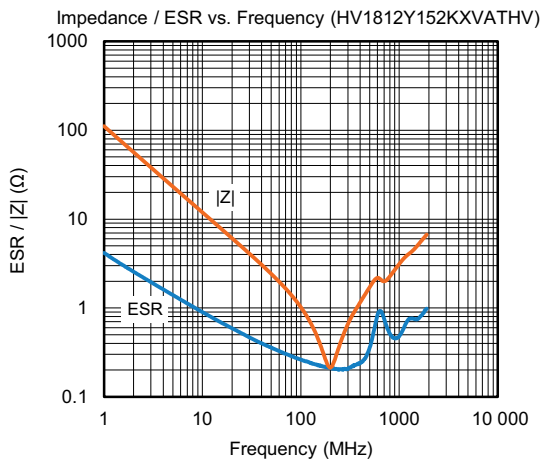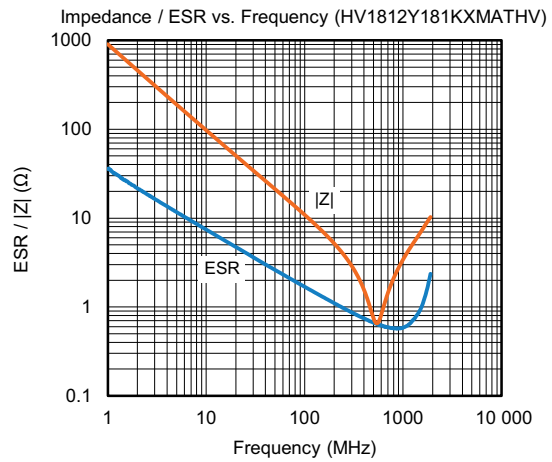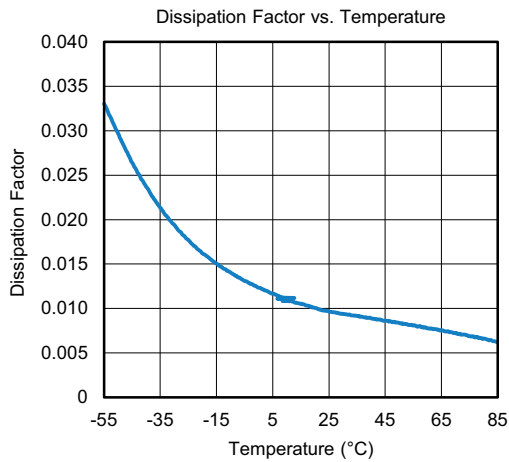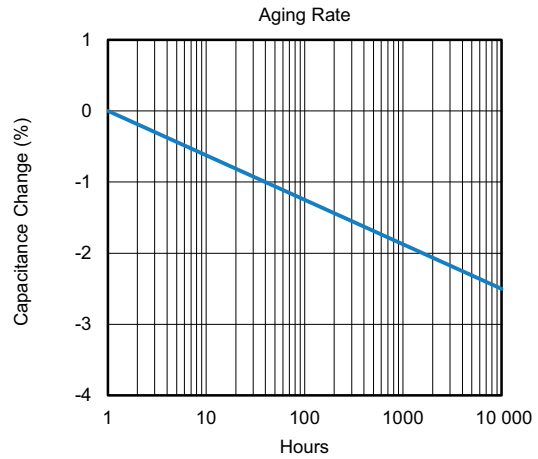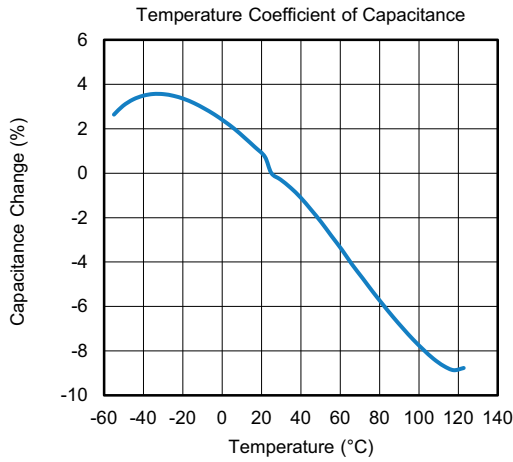

X7R DIELECTRIC - TYPICAL PARAMETERS

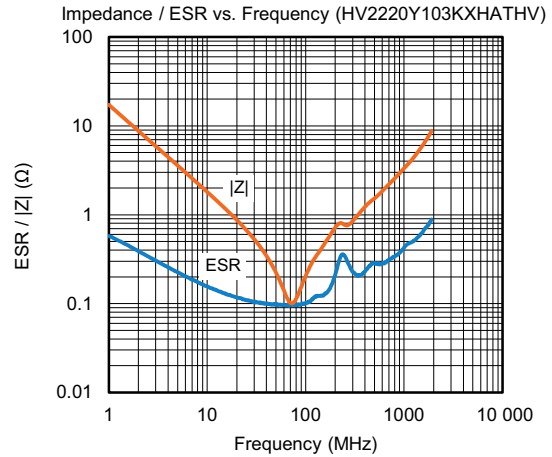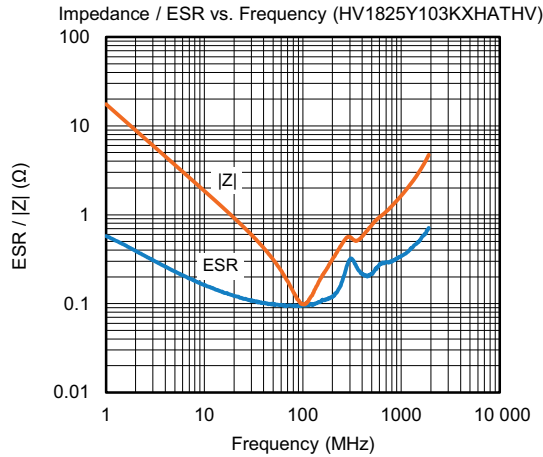


POLYMER TERMINATION

Polymer termination provides additional protection against board flexure damage by absorbing greater mechanical and thermal stresses. Components can be packaged, transported, stored and handled the same standard terminated product. Reflow soldering of MLCC does not require modification to equipment and / or process. Polymer termination greatly reduces the risk of mechanical cracking however it does not completely eliminate.


STANDARD TERMINATION

Exposed Electrodes = Electrical Short

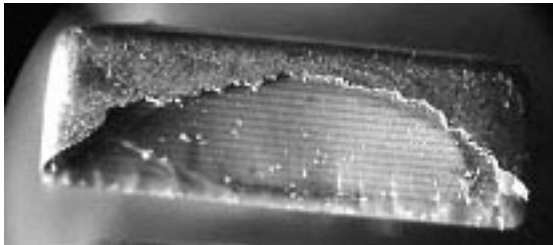

OMD CAP PLUS POLYMER TERMINATION

No Exposed Electrodes = No Electrical Short

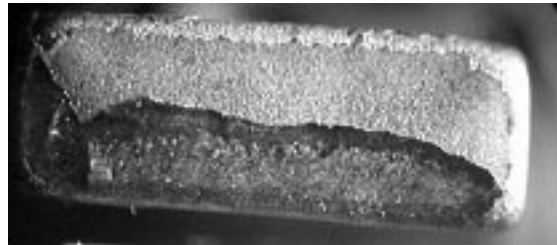

STANDARD PACKAGING QUANTITIES (1)

CASE CODE	TAPE SIZE	7" REEL QUANTITIES PACKAGING CODE "T"	11 1/4" AND 13" REEL QUANTITIES PACKAGING CODE "R"
1812	12 mm	500 ⁽²⁾ / 1000	4000
1825	12 mm	500 ⁽²⁾ / 1000	4000
2220	12 mm	500 ⁽²⁾ / 1000	n/a
2225	12 mm	500	n/a

Notes

- (1) Reference: EIA standard RS 481 - "Taping of Surface Mount Components for Automatic Placement"
- (2) Lower quantity for certain ratings, see "Selection Chart"

STORAGE AND HANDLING CONDITIONS

- (1) Store the components at 5 °C to 40 °C ambient temperature and ≤ 70 % relative humidity conditions.
- (2) The product is recommended to be used within a time-frame of 2 years after shipment.
Check solderability in case extended shelf life beyond the expiry date is needed.

Precautions:

- a. Do not store products in an environment containing corrosive elements, especially where chloride gas, sulfide gas, acid, alkali, salt or the like are present. This may cause corrosion or oxidation of the terminations, which can easily lead to poor soldering.
- b. Store products on the shelf and avoid exposure to moisture or dust.
- c. Do not expose products to excessive shock, vibration, direct sunlight and so on.



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [vishay](#) manufacturer:

Other Similar products are found below :

[M39006/22-0577H](#) [Y00892K49000BR13L](#) [VSKT250-16PBF](#) [M8340109M6801GGD03](#) [NTCALUG01A103F291L](#) [ITU1341SM3](#) [VS-MBRB1545CTPBF](#) [1KAB100E](#) [1KAB20E](#) [IH10EB600K12](#) [CP0005150R0JE1490](#) [562R5GAD47RR](#) [S472M69Z5UR84K0R](#)
[MKP1848C65090JY5L](#) [CRCW1210360RFKEA](#) [VSMF4720-GS08](#) [TSOP34438SS1V](#) [CRCW04024021FRT7](#) [001789X](#) [LTO050FR0500JTE3](#)
[CRCW08054K00FKTA](#) [LVR10R0200FE03](#) [CRCW12063K30FKEAHP](#) [009923A](#) [CRCW2010331JR02](#) [CRCW25128K06FKEG](#)
[CS6600552K000B8768](#) [CSC07A0110K0GPA](#) [M34C156K100BZSS](#) [M39003/01-2289](#) [M39003/01-2784](#) [M39006/25-0133](#) [M39006/25-0228](#)
[M64W101KB40](#) [M64Z501KB40](#) [CW001R5000JS73](#) [CW0055R000JE12](#) [CW0056K800JB12](#) [CW0106K000JE73](#) [672D826H075EK5C](#)
[CWR06JC105KC](#) [CWR06NC475JC](#) [MAL219699001E3](#) [MCRL007035R00JHB00](#) [GBU4K-E3/51](#) [GBU8M-E3/51](#) [GF1A-E3/67A](#)
[PTF56100K00QYEK](#) [PTN0805H1502BBTR1K](#) [RCWL1210R130JNEA](#)