

Vishay Dale

High Current Common Mode Choke

FEATURES

• Surface mountable (multiple case sizes), high current common mode choke for DC power line



COMPLIANT

- · Base terminals are treated, allows for easy mounting on PCB
- · Paired wire coil for high stability
- · Optimized for transmission of high quality signals
- Operating temperature: -40 °C to +85 °C
- Rated Current: Based on temp. rise; ∆T: 40 °C, typical
- Material categorization: for definitions of compliance please see www.vishay.com/doc?99912

APPLICATIONS

- LAN's, telephones, personal computers
- CD-ROM drives, electronic games
- Other electronic devices

PART NUMBER	IN	MMON MODE IPEDANCE T 100 MHz (Ω)	M	VOLTAGE AX. ′ _{DC})	RATED CURREI MAX. (mA)	NT DC	RESISTAN MAX. (Ω)		INSULA ESISTAN (ΜΩ	CE MIN.
ICM2824ER301V		300	8	30	5000		0.01		10	
ICM2824ER701V		700	8	30	4000		0.015		10	
ICM3528ER701V	3ER701V 700		80		5000	0.01			10	
ICM3528ER152V 1500		1500	80		4500		0.015		10	
ICM4743ER701V		700		30 8000		0.006		10		
ICM4743ER102V		1000	8	30	6000		0.014		10	
		(2) D			- ⊢ ⊗⊗			(1) ০		— ○(2)
B F (4)		c			J. ∭		G	•(4)•		
<u>v</u> (4)		C				ATTERN] 	(4) o		
		C	C 0.157 [4.0] max.	D 0.063 ± 0.0 [°] [1.6 ± 0.3]	E 12 0.071 ± 0.012		G 0.118	•(4)•	I 0.098	
PART NUMBER	A 0.276 ± 0.012	(3)	0.157	0.063 ± 0.0^{-1}	E 12 0.071 ± 0.012 [1.8 ± 0.3]	ATTERN F 0.118	G 0.118 [3.0] ref. 0.138	(4) <u>•</u> si <u>H</u> 0.256	l 0.098 [2.5] ref. 0.098	—⊙ (3) 0.063 [1.6] re 0.071
PART NUMBER ICM-2824	A 0.276 ± 0.012 [7.0 ± 0.3] 0.354 ± 0.020	(3) B 0.236 ± 0.008 $[6.0 \pm 0.2]$ 0.276 ± 0.012	0.157 [4.0] max. 0.197	0.063 ± 0.0^{-1} [1.6 ± 0.3] 0.060 ± 0.00^{-1}	E 12 0.071 ± 0.012 $[1.8 \pm 0.3]$ 0.060 ± 0.008 $[1.5 \pm 0.2]$ 0.091 ± 0.008	F 0.118 [3.0] typ. 0.138	G 0.118 [3.0] ref. 0.138 [3.5] ref. 0.205	(4) 0 (4) 0 S((4) 0 S((4) 0 S((4) 0 (4) 0 (4) 0 (4) 0 (4) 0 (4) 0 (4) 0 (4) 0 (5)	l 0.098 [2.5] ref. 0.098	—⊸ (3) J 0.063

ICM-3528 700			25 %		ER		e3	
MODEL	IMPEDANCE V	ALUE	TOLERANCE	PAC	CKAGE CODE	JEDEC [®] LEAD (Pt	o)-FREE STANDARD	
GLOBAL P	PART NUMBEI	R						
	СМ	3	5 2	8	ER	7 0	1 V	
MODEL		SIZE		PACKAGE CODE	IMPEDANC	E TOL.		
Revision: 04-Apr-16				1			Document Number: 343	25

Revision: 04-Apr-16

For technical questions, contact: magnetics@vishay.com


Document Number: 34325

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishav.com/doc?91000





Vishay Dale

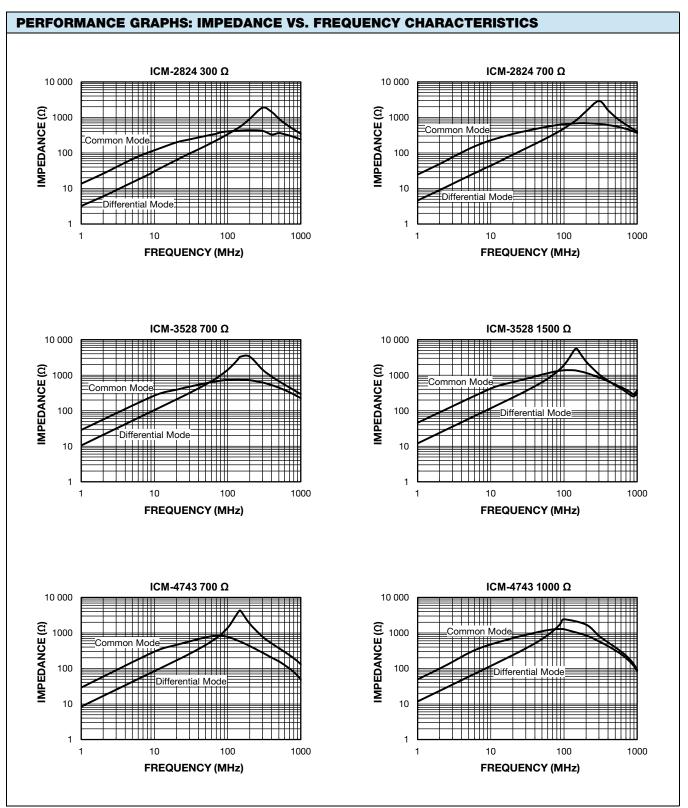

2



Vishay

Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

Material Category Policy

Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as RoHS-Compliant fulfill the definitions and restrictions defined under Directive 2011/65/EU of The European Parliament and of the Council of June 8, 2011 on the restriction of the use of certain hazardous substances in electrical and electronic equipment (EEE) - recast, unless otherwise specified as non-compliant.

Please note that some Vishay documentation may still make reference to RoHS Directive 2002/95/EC. We confirm that all the products identified as being compliant to Directive 2002/95/EC conform to Directive 2011/65/EU.

Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as Halogen-Free follow Halogen-Free requirements as per JEDEC JS709A standards. Please note that some Vishay documentation may still make reference to the IEC 61249-2-21 definition. We confirm that all the products identified as being compliant to IEC 61249-2-21 conform to JEDEC JS709A standards.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Common Mode Chokes / Filters category:

Click to view products by Vishay manufacturer:

Other Similar products are found below :

 74279408
 PE-62911NL
 PE-64683
 ST6118T-R
 T8114NLT
 RD5122-10-6M0
 TCM0806G-350-2P-T
 TCM0806G-650-2P-T
 IND-0110

 UAL21V07012500
 UAL21VR0802000
 UAL24VR06500CH
 UALSC023000000
 UALSC1020JH000
 UALSC1520JH000

 UALSU16VD30030
 UALSU16VD40010
 UALSU9H0305000
 UALSU9HF060300
 UALSU9VD070100
 36-00037
 5701610000

 UALW21HS072450
 UALSU9VD070400
 UALSU9HF050500
 UALSU9H0208000
 UALSCF25081300
 UAL24VK06450CH

 PLT10HH501100PNB
 PLT10HH401100PNB
 PLT10HH1026R0PNB
 PE-67531
 EXC-X4CH120X
 TLH10UB
 113<0R5</td>
 2752041447

 2752045447
 CMS3-11-R
 7351V
 CMF16-153131
 744252510
 T8116NLT
 FE2X10-4-2NL
 744253200
 744253101
 744252220
 TX8111NLT

 UAL30VR3500470
 CTX01-19077-R
 T8003NLT
 CTX01-13663
 10000
 10000
 10000
 10000