
LCD-160H128E



160 x 128 Graphic LCD

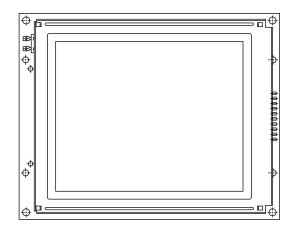

MECHANICAL DATA					
ITEM	STANDARD VALUE	UNIT			
Module Dimension	129.0 x 102.0				
Viewing Area	101.0 x 82.0				
Dot Size	0.54 x 0.54				
Dot Pitch	0.58 x 0.58	mm			
Mounting Hole	122.0 x 96.2				
Character Size	N/a				

FEATURES

- Type: Graphic
- Display format: 160 x 128 dots
- Built-in controller: RA6963
- Duty cycle: 1/128
- Optional N.V.
- + 5 V power supply
- View angle 12° horizontal only
- Material categorization: For definitions of compliance please see <u>www.vishay.com/doc?99912</u>

ABSOLUTE MAXIMUM RATINGS						
ITEM	SYMBOL	STAN	UNIT			
	STIVIDUL	MIN.	TYP.	MAX.		
Power Supply	V_{DD} to V_{SS}	4.75	5.0	5.25	v	
Input Voltage	VI	- 0.3	-	V _{DD}		

Note

[•] $V_{SS} = 0 V$, $V_{DD} = 5.0 V$

ELECTRICAL CHARACTERISTICS							
ITEM	SYMBOL	CONDITION	ST				
	STMDUL	CONDITION	MIN.	TYP.	MAX.	UNIT	
Input Voltage	V _{DD}	-	4.75	5.0	5.25	V	
Supply Current	I _{DD}	$V_{DD} = +5 V$	-	45.0	50.0	mA	
Recommended LC Driving		- 20 °C	19.9	21.0	22.1	v	
Voltage for Normal Temperature	V_{DD} to V_0	25 °C	18.6	19.1	19.6		
Version Module		70 °C	11.6	9.1	12.8		
CCFL Starting Voltage	V _{FLS}	25 °C	-	-	-	V _{RMS}	
CCFL Driving Voltage	V _{FLD}	25 °C	-	256	560	V _{RMS}	
CCFL Driving Current	I _{FLD}	$V_{FQ} = 450 V_{RMS}$, 30 kHz	-	-	5.0	mA	
LED Forward Voltage	V _F	25 °C	-	4.6	4.6	V	
LED Forward Current	lF	25 °C	-	-	500	mA	
EL Power Supply Current	I _{EL}	V _{EL} = 110 V _{AC} , 400 Hz	-	-	5.0	mA	

OPTIONS									
PROCESS COLOR					BACKLIGHT				
TN	STN GRAY	STN YELLOW	STN BLUE	FSTN B&W	STN COLOR	NONE	LED	EL	CCFL
	х	х	х	х		х	х	х	х

For detailed information, please see the "Product Numbering System" document.

Revision: 07-Nov-12

Document Number: 37359




Vishay

RoHS COMPLIANT



Vishay

INTERFACE PIN FUNCTION					
PIN NO.	SYMBOL	FUNCTION			
1	FG	Frame ground			
2	V _{SS}	Power supply (Ground)			
3	V _{DD}	Power supply (+ 5 V)			
4	V _{ADJ}	Contrast adjustment			
5	V _{EE}	Negative voltage output			
6	WR	Data write			
7	RD	Data read			
8	CE	Chip enable			
9	C/D	Command/data read/write			
10	HALT	Clock operating stop signal			
11	Reset	Reset signal			
12	DB0	Data bus line			
13	DB1	Data bus line			
14	DB2	Data bus line			
15	DB3	Data bus line			
16	DB4	Data bus line			
17	DB5	Data bus line			
18	DB6	Data bus line			
19	DB7	Data bus line			
20	NC	No connection			

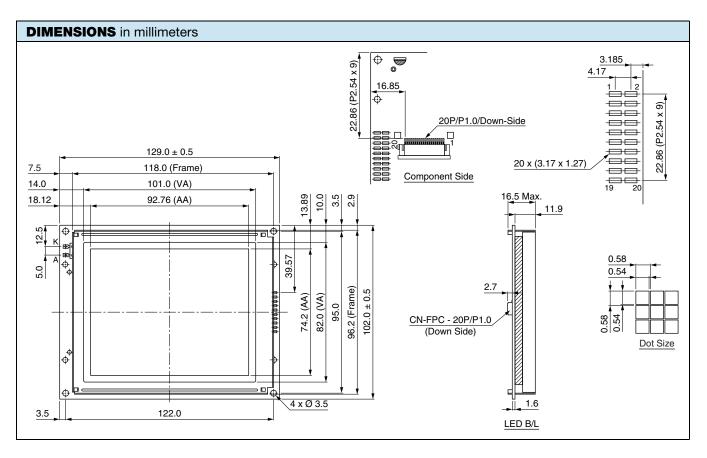

Revision: 07-Nov-12

2 For technical questions, contact: <u>displays@vishay.com</u> Document Number: 37359

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000



Vishay

Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Hyperlinks included in this datasheet may direct users to third-party websites. These links are provided as a convenience and for informational purposes only. Inclusion of these hyperlinks does not constitute an endorsement or an approval by Vishay of any of the products, services or opinions of the corporation, organization or individual associated with the third-party website. Vishay disclaims any and all liability and bears no responsibility for the accuracy, legality or content of the third-party website or for that of subsequent links.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for LCD Graphic Display Modules & Accessories category:

Click to view products by Vishay manufacturer:

Other Similar products are found below :

HDM64GS12L-Y11S
MGLS-240128-Z05
DEM 128064U FGH
DEM 240064E FGH-PW
11557
18396
15932
RED202A
HDM64GS24L-2

Y14S
RG12864B-FHW-V
RG12864B-GHW-V
DEM 128064A SBH-PW-N
DEM 128064B SBH-PW-N
DEM 128064G FGH-PW
DEM

128064O
FGH-PW
DEM 128064O SBH-PW-N
DEM 128064P SBH-PW-N
DEM 128064Q SBH-PW-N
DEM 128128D FGH-PW
DEM

240064B
FGH-PW
DEM 240064B SBH-PW-N
DEM 320240B FGH-PW-N
EA
W240-7KHLW
16239
RX240128A-TIW
RX240160A-FHW

18370
19340
RG24064A-TIW-V
EA
FL-14P
GLK19264A-7T-1U-TCI
GLK19264A-7T-1U-USB-WB
DEM 320240I SBH-PW-N

GLK24064R-25-1U-WB
DEM 240160A FGH-PW
RG240128B-BIW-V
RG24064A-FHW-V
DEM 128064A FGH-PW-N

PW (A-TOUCH)
DEM 128064A SBH-PW-N (A-TOUCH)
DEM 128064B FGH-PW
DEM 128064J FGH-PW
DEM 128064J FGH-PW

DEM 128064P FGH-PW
DEM 320240C SBH-PW-N
DEM 320240I FGH-PW
DEM 128064F SBH-PW-N
DEM 128128B1 FGH-PW

DEM 128064P FGH-PW
DEM 320240C SBH-PW-N
DEM 320240I FGH-PW
DEM 128064F SBH-PW-N
DEM 128128B1 FGH-PW

DEM 128064P FGH-PW
DEM 3